

SUNCOR STAINLESS®

- INDUSTRIAL
- RIGGING
- MARINE
- OEM
- GOVERNMENT
- CUSTOM

THE LEADER IN STAINLESS STEEL CHAIN & HARDWARE

ISO 9001:2015 CERTIFIED

MIL-DTL-781 & MIL-DTL-6117 APPROVED

VOLUME 13

CONTACT INFORMATION

CUSTOMER SERVICE
(508) 732-9191

ORDERS
(800) 394-2222

FAX
(508) 732-9798

EMAIL
sales@suncorstainless.com

WEB ADDRESS
www.suncorstainless.com

Suncor has implemented a Quality Management System in accordance with **ISO 9001:2015** and is approved by the US Government to manufacture cable terminals and assemblies per **MIL-DTL-781** and **MIL-DTL-6117**.

CAGE CODE: 1CXX6

@suncorstainless

company/suncor-stainless

suncorstainless

@SuncorStainless

@suncorstainlessinc

SUNCOR® Stainless

Logos, images and content in this catalog are the property of Suncor Stainless, Inc. and their respective owners.

© 2026 Suncor Stainless Inc.

NACM

ANAB ACCREDITED Certified to ISO 9001:2015

AWRF

SUNCOR® Stainless

HEADQUARTERS
70 Armstrong Road
Plymouth, MA 02360

WEST COAST OFFICE & DISTRIBUTION CENTER
3900 Civic Center Drive
North Las Vegas, NV 89030

SUNCOR PACIFIC, CHINA
Manufacturing & Distribution

SOUTH AMERICA OFFICE
Satellite Office

ABOUT US

Suncor Stainless, Inc. is the industry's leading manufacturer of stainless steel hardware and components in the industrial, marine, architectural, commercial, government and OEM markets. With modern facilities nationally and worldwide, Suncor's ever-expanding product line has become one of the world's most complete and highest quality sources for stainless steel chain, hardware, and custom parts. From stainless steel rigging hardware to marine grade fittings, our stainless steel products will meet and exceed your expectations. We also offer a variety of value-added services such as product testing, retail packaging, custom manufacturing, and more. Contact us today with any questions on ordering or product availability and you'll know why so many others choose Suncor Stainless as their number one source for stainless!

TABLE OF CONTENTS


2 CHAIN


4 SHACKLES


8 TURNBUCKLES


14 TIE RODS


17 EYE BOLTS


20 LIFTING HOOKS


22 TIE DOWN RINGS & PAD EYES


29 SWIVEL HOIST RINGS


30 SWIVELS


32 BLOCKS & SHEAVES


37 THIMBLES, WIRE ROPE CLIPS & WIRE ROPE


39 SWAGE HARDWARE


45 QUICK ATTACH™


47 CLIPS & CARABINERS


51 SNAPS


53 LINKS, RINGS & HOOKS


57 HINGES & HASPS


60 FASTENERS


63 TIE DOWNS & HARDWARE


68 YOKE ENDS & TOGGLES


70 RAILING & BIMINI


74 DECK HARDWARE


77 ANCHORS


78 TRAILER PARTS & ACCESSORIES


80 LIGHTING & ELECTRICAL


83 TOOLS & CLEANING

QUALITY ASSURANCE 85
CUSTOM PROD. & SERVICES . . . 86
ATLANTIS RAIL SYSTEMS 88
TERMS & CONDITIONS. 89

SUNCOR STAINLESS, INC.

CHAIN

STAINLESS STEEL CHAIN

Suncor Stainless is the leading manufacturer of USA made stainless steel chain. Suncor manufactures and stocks a large inventory of rated, industrial, MIL-DTL-32655, marine, light duty, decorative and specialty chain. Suncor provides both USA made and imported chain products. We specialize in custom chain fabrication combining welding services, slings, testing, and custom assemblies.

NACM INDUSTRIAL CHAIN



316L STAINLESS STEEL

S0602-0 SERIES:
5/32" through 1"

BULK SIZES AVAILABLE

MADE IN USA

MOST COMMONLY USED CHAIN FOR MARINE APPLICATIONS.

NACM INDUSTRIAL CHAIN



304L STAINLESS STEEL

S0605-0 SERIES:
5/32" through 3/8"

BULK SIZES AVAILABLE

MADE IN USA

MOST ECONOMIC AND COMMONLY USED CHAIN FOR INDUSTRIAL APPLICATIONS.

NACM INDUSTRIAL CHAIN (S4, MEETS G4 SIZE)



316L STAINLESS STEEL

S0604-0 SERIES:
1/4" (9/32) through 1/2"

BULK SIZES AVAILABLE

MADE IN USA

SUNCOR'S GRADE S4 CHAIN IS MADE TO "G4" DIMENSIONS.

GRADE 50 LIFTING CHAIN (S5)



316L STAINLESS STEEL

S0603-0 SERIES:
3/16" through 5/8"

BULK SIZES AVAILABLE

MADE IN USA

MADE TO GRADE 80 DIMENSIONS. MEETS THE REQUIREMENTS OF: MIL-DTL-32655. RATED FOR OVERHEAD LIFTING.

ANCHOR CHAIN (S1, BBB)



316L STAINLESS STEEL

S0601-0 SERIES:
1/4" (9/32) through 1/2"

BULK SIZES AVAILABLE

CALIBRATED CHAIN, HAS DIMENSIONS OF "BBB" CHAIN AND FITS MANY STANDARD WINDLASSES. COMPLIES WITH ALL REQUIREMENTS OF DIN 766.

ECONOMY IMPORT CHAIN



316 STAINLESS STEEL

S660-A SERIES:
1/8" through 1/2"

BULK SIZES AVAILABLE

CHAIN SHOULD BE CHECKED OR MEASURED FOR COMPATIBILITY WHEN USED WITH OTHER PARTS. WELDED AND POLISHED. NOT RATED FOR OVERHEAD LIFTING.

ECONOMY IMPORT CHAIN



304 STAINLESS STEEL

S660-0 SERIES:
1/8" through 3/8"

BULK SIZES AVAILABLE

CHAIN SHOULD BE CHECKED OR MEASURED FOR COMPATIBILITY WHEN USED WITH OTHER PARTS. WELDED AND POLISHED. NOT RATED FOR OVERHEAD LIFTING.

LONG LINK CHAIN (S6)



304L STAINLESS STEEL

S0606-0 SERIES:
5/64"through 1/4"

BULK SIZES AVAILABLE

MEETS THE REQUIREMENTS OF: MIL-DTL-32655. THIS CHAIN COMPLIES WITH ALL REQUIREMENTS OF DIN 5685-C.

DOUBLE LOOP CHAIN (S7)



304 STAINLESS STEEL

S0626-0 SERIES:
2/0 through #3

MADE IN USA

SOLD IN 100 FOOT LENGTHS ONLY.
I/A/W ASTM A466 AND NACM STANDARDS.

TWIST LINK CHAIN (S8)



304 STAINLESS STEEL

S0611-0 SERIES:
5/64" through 5/32"

BULK SIZES AVAILABLE

*MEETS THE REQUIREMENTS OF: MIL-DTL-32655 (*EXCLUDING S0611-0003 & S0611-M003).*

SINGLE JACK CHAIN (S9)



304/302 STAINLESS STEEL

S0621-0 SERIES:
#18 1.2 MM through
#10 3.3 MM

MADE IN USA

SOLD IN 100 FOOT LENGTHS ONLY.
I/A/W ASTM A466 AND NACM STANDARDS.

SASH CHAIN (S10)



304 STAINLESS STEEL

S0631-0 SERIES:
#35 0.9 MM through
#8 0.6 MM

MADE IN USA

SOLD IN 100 FOOT LENGTHS ONLY.
I/A/W ASTM A466 AND NACM STANDARDS.

SAFETY CHAIN



302 STAINLESS STEEL

S0641-0 SERIES:
1/0 through 2/0

SOLD IN 100 FOOT LENGTHS ONLY.

TRAILER SAFETY CHAIN PACK



316L STAINLESS STEEL

C0275-0 SERIES:
1/4" through 5/16"

MADE IN USA

FOR ADDITIONAL SAFETY, THIS KIT CONTAINS ONE HIGH QUALITY QUICK LINK, PERMANENTLY MARKED WITH WLL, LOGO, 316SS.

CHAIN PRE-PACK



316L STAINLESS STEEL

C0132-0 SERIES:
3/16" through 3/8"

MADE IN USA

PRE-CUT CHAIN IN BAR CODED PACKAGING. COMMONLY USED AS LEAD CHAIN FOR PLEASURE MARINE ANCHORS (GROUND TACKLE).

CHAIN PACK



316L STAINLESS STEEL

C0132-0-CH SERIES:
1/4" through 3/8"

PRE-CUT CHAIN IN BAR CODED PACKAGING. COMMONLY USED AS LEAD CHAIN FOR PLEASURE MARINE ANCHORS (GROUND TACKLE).

PRODUCTS FREQUENTLY PURCHASED WITH CHAIN:


PG. 5


BOLT ANCHOR SHACKLE
S0116-SA SERIES


PG. 54

MASTER LINK
S0650-0 SERIES


PG. 54

HAMMERLOCK LINK
S0655-0 SERIES



PG. 54

SLING ID TAG
S0600-0 SERIES

SUNCOR STAINLESS, INC.

SHACKLES

STAINLESS STEEL SHACKLES

Suncor Stainless manufactures USA made shackles, components, pins and bolts for all marine, industrial and architectural needs. Our USA made shackles and components consistently meet and exceed the requirements of the most demanding applications. Suncor stocks a large variety of USA made shackles and offers many shackles in import varieties as well.

STRAIGHT D SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0115-0 SERIES:
5/32" through 1-1/4"

IDEAL FOR MARINE AND INDUSTRIAL APPLICATIONS.

STRAIGHT D SHACKLE WITH CAPTIVE PIN



316 STAINLESS STEEL

S0115-CP SERIES:
5/32" through 15/32"

PIN HAS SELF-LOCKING FEATURE SO PIN CANNOT BE REMOVED FROM BODY. PIN IS NOT REPLACEABLE OR REMOVABLE FROM THE SHACKLE.

STRAIGHT D SHACKLE WITH NO SNAG PIN



316 STAINLESS STEEL

S0115-NS SERIES:
1/4" through 1"

NO SNAG PIN SITS FLUSH WITH BODY OF SHACKLE. FEATURES HEX DRIVE HEAD. LARGER SIZES WITH SLOTTED HEAD.

CHAIN SHACKLE WITH OVERSIZE SCREW PIN



316 STAINLESS STEEL

S0115-FS SERIES:
1/4" through 1"

FORGED

I/A/W FED. SPECIFICATION RR-C-271, TYPE IVB, CLASS 2, (EXCEPT 316 STAINLESS STEEL). MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.26. RATED FOR OVERHEAD LIFTING.

BOLT CHAIN SHACKLE WITH OVERSIZE BOLT



316 STAINLESS STEEL

S0115-SA SERIES:
1/4" through 1"

FORGED

I/A/W FED. SPECIFICATION RR-C-271, TYPE IVB, CLASS 3, (EXCEPT 316 STAINLESS STEEL). MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.26. RATED FOR OVERHEAD LIFTING.

US BOLT CHAIN SHACKLE WITH OVERSIZE BOLT



316 STAINLESS STEEL

S0115-SA-US SERIES:
1/4" through 1"

MADE IN USA

FORGED

I/A/W FED. SPECIFICATION RR-C-271, TYPE IVB, CLASS 3, (EXCEPT 316 STAINLESS STEEL). MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.26. RATED FOR OVERHEAD LIFTING.

ROUND PIN CHAIN SHACKLE WITH OVERSIZE ROUND PIN



316 STAINLESS STEEL

S0115-RP SERIES:
1/4" through 1"

FORGED

I/A/W FED. SPECIFICATION RR-C-271, TYPE IVB, CLASS 1, (EXCEPT 316 STAINLESS STEEL). LOAD RATED.

US ROUND PIN CHAIN SHACKLE WITH OVERSIZE ROUND PIN



316 STAINLESS STEEL

S0115-RP-US SERIES:
1/4" through 1"

MADE IN USA

FORGED

I/A/W FED. SPECIFICATION RR-C-271, TYPE IVB, CLASS 1, (EXCEPT 316 STAINLESS STEEL). LOAD RATED.

STRAIGHT D SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0117-0 SERIES:
3/16" through 3/4"

FORGED

PIN DIAMETER MATCHES THE SHACKLE BODY DIAMETER.

STRAIGHT D SHACKLE WITH BOLT



316 STAINLESS STEEL

S0117-SA SERIES:
1/4" through 3/4"

FORGED

BOLT DIAMETER MATCHES THE SHACKLE BODY DIAMETER.

ANCHOR SHACKLE WITH OVERSIZE SCREW PIN



316 STAINLESS STEEL

S0116-FS SERIES:
3/16" through 1-1/4"

FORGED

*I/A/W FED SPEC RR-C-271, TYPE IVA, CLASS 2, EXCEPT 316 STAINLESS. MEETS REQUIREMENTS OF: MIL-DTL-32655 (*EXCLUDING S0116-FS05). MEETS ASME B30.26. RATED FOR OVERHEAD LIFTING.*

US ANCHOR SHACKLE WITH OVERSIZE SCREW PIN



316 STAINLESS STEEL

S0116-FS-US SERIES:
1/4" through 1-1/4"

MADE IN USA

FORGED

I/A/W FED SPEC RR-C-271, TYPE IVA, CLASS 2, EXCEPT 316 STAINLESS. MEETS ASME B30.26. DFARS COMPLIANT SHACKLES. RATED FOR OVERHEAD LIFTING.

ROUND PIN ANCHOR SHACKLE WITH OVERSIZE ROUND PIN



316 STAINLESS STEEL

S0116-RP SERIES:
1/4" through 1-1/4"

FORGED

I/A/W FEDERAL SPECIFICATION RR-C-271, TYPE IVA, CLASS 1, EXCEPT 316 STAINLESS. MEETS REQUIREMENTS OF: MIL-DTL-32655.

US ROUND PIN ANCHOR SHACKLE WITH OVERSIZE ROUND PIN



316 STAINLESS STEEL

S0116-RP-US SERIES:
1/4" through 1-1/4"

MADE IN USA

FORGED

I/A/W FEDERAL SPECIFICATION RR-C-271, TYPE IVA, CLASS 1, EXCEPT 316 STAINLESS. MEETS REQUIREMENTS OF: MIL-DTL-32655.

BOLT ANCHOR SHACKLE WITH OVERSIZE BOLT



316 STAINLESS STEEL

S0116-SA SERIES:
1/4" through 1-1/4"

FORGED

I/A/W FED SPEC RR-C-271, TYPE IVA, CLASS 3, EXCEPT 316 STAINLESS. MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.26. RATED FOR OVERHEAD LIFTING.

US BOLT ANCHOR SHACKLE WITH OVERSIZE BOLT



316 STAINLESS STEEL

S0116-SA-US SERIES:
1/4" through 1-1/4"

MADE IN USA

FORGED

I/A/W FED SPEC RR-C-271, TYPE IVA, CLASS 3, EXCEPT 316 STAINLESS. MEETS ASME B30.26. RATED FOR OVERHEAD LIFTING.

BOLT ANCHOR SHACKLE WITH OVERSIZE BOLT (LARGE)



316 STAINLESS STEEL

S0116-SA38 & S0116-SA42:
1-1/3" & 1-3/4"

BOW SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0116-0 SERIES:
5/32" through 1-1/4"

BOW SHACKLE WITH CAPTIVE PIN



316 STAINLESS STEEL

S0116-CP SERIES:
5/32" through 1/2"

PIN HAS SELF-LOCKING FEATURE SO PIN CANNOT BE REMOVED FROM BODY. PIN IS NOT REPLACEABLE OR REMOVABLE FROM THE SHACKLE.

BOW SHACKLE WITH NO SNAG PIN



316 STAINLESS STEEL

S0116-NS SERIES:
1/4" through 1"

NO SNAG PIN SITS FLUSH WITH BODY OF SHACKLE. FEATURES HEX DRIVE HEAD. LARGER SIZES WITH SLOTTED HEAD.

BOW SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0119-0 SERIES:
3/16" through 3/4"

FORGED

PIN DIAMETER MATCHES THE SHACKLE BODY DIAMETER.

BOW SHACKLE WITH BOLT



316 STAINLESS STEEL

S0119-SA SERIES:
1/4" through 3/4"

FORGED

BOLT DIAMETER MATCHES THE SHACKLE BODY DIAMETER.

WIDE D SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0114-0 SERIES:
1/4" through 1/2"

WIDE D SHACKLE WITH NO SNAG PIN



316 STAINLESS STEEL

S0114-NS SERIES:
1/4" through 1/2"

NO SNAG PIN SITS FLUSH WITH BODY OF SHACKLE. FEATURES HEX DRIVE HEAD.

LONG D SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0138-0 SERIES:
5/32" through 1/2"

IDEAL FOR MARINE APPLICATIONS.

LONG D SHACKLE WITH CAPTIVE PIN



316 STAINLESS STEEL

S0138-CP SERIES:
5/32" through 1/2"

PIN HAS SELF-LOCKING FEATURE SO PIN CANNOT BE REMOVED FROM BODY. PIN IS NOT REPLACEABLE OR REMOVABLE FROM THE SHACKLE. IDEAL FOR MARINE APPLICATIONS.

LONG D SHACKLE WITH NO SNAG PIN



316 STAINLESS STEEL

S0138-NS SERIES:
1/4" through 1/2"

NO SNAG PIN SITS FLUSH WITH BODY OF SHACKLE. FEATURES HEX DRIVE HEAD. IDEAL FOR MARINE APPLICATIONS.

STAMPED D SHACKLE WITH SCREW PIN



304 STAINLESS STEEL

S0118-0 SERIES:
5/32" through 3/16"

IDEAL FOR LIGHT DUTY APPLICATIONS.

HALYARD SHACKLE WITH KEY PIN



316/17-4 PH STAINLESS STEEL

S0164-0 & S0164-HR SERIES:
3/16" through 5/16"

IDEAL FOR MARINE APPLICATIONS.

LONG SHACKLE WITH KEY PIN



316/17-4 PH STAINLESS STEEL

S0167-0 & S0167-HR SERIES:
3/16" through 5/16"

IDEAL FOR MARINE APPLICATIONS.

HEADBOARD SHACKLE WITH CAPTIVE PIN



316 STAINLESS STEEL

S0173-0 SERIES:
1/4" through 1/2"

PIN HAS SELF-LOCKING FEATURE SO PIN CANNOT BE REMOVED FROM BODY. PIN IS NOT REPLACEABLE OR REMOVABLE FROM THE SHACKLE. IDEAL FOR MARINE APPLICATIONS.

TWIST SHACKLE WITH SCREW PIN



316 STAINLESS STEEL

S0163-0 SERIES:
5/32" through 1/2"

IDEAL FOR MARINE APPLICATIONS.

TWIST SHACKLE WITH CAPTIVE PIN



316 STAINLESS STEEL

S0163-CP SERIES:
1/4" through 3/8"

PIN HAS SELF-LOCKING FEATURE SO PIN CANNOT BE REMOVED FROM BODY. PIN IS NOT REPLACEABLE OR REMOVABLE FROM THE SHACKLE. IDEAL FOR MARINE APPLICATIONS.

TWIST SHACKLE WITH NO SNAG PIN




316 STAINLESS STEEL

S0163-NS SERIES:
1/4" through 1/2"

NO SNAG PIN SITS FLUSH WITH BODY OF SHACKLE. FEATURES HEX DRIVE HEAD. IDEAL FOR MARINE APPLICATIONS.

SEIZING WIRE



ANNEALED STAINLESS STEEL

S0715-0 SERIES:
0.020" through 0.041"

MADE IN USA

USE SUNCOR'S QUALITY SEIZING WIRE TO KEEP SHACKLE SCREW PINS IN PLACE.

COTTER PIN



18-8 STAINLESS STEEL

P0116-CT SERIES:
1/16" through 1/4"

USED WITH ROUND PIN AND BOLT ANCHOR/CHAIN SHACKLES.

WORKING LOAD LIMITS (WLL)

Working Load Limit (WLL) is the maximum working load designed by the manufacturer. This load represents a force that is much less than that required to make the lifting equipment fail or yield. The WLL is calculated by dividing the breaking load limit (BLL) by a safety factor (SF). An example of this would be a chain that has a BL of 2,000 lb. WLL of 400 lb. if a safety factor of 5 (5:1, 5 to 1, or 1/5) is used.

As such:

WLL = BLL / SF

- For forged products Suncor uses a 5:1 safety factor (SF).
- For cast products Suncor uses a 4:1 safety factor (SF).
- For all other products, such as assemblies, Suncor uses a 4:1 safety factor (SF).

TURNBUCKLES

STAINLESS STEEL TURNBUCKLES

Suncor Stainless manufactures one of the most extensive and versatile product lines of stainless steel turnbuckles and turnbuckle hardware. We feature standard turnbuckles, machine swage turnbuckles, hand swage turnbuckles and mechanical swage turnbuckles. Suncor's turnbuckles are ideal for marine, industrial and architectural projects and feature jaws, hooks, stubs and open or closed body styles.

FORGED JAW AND JAW TURNBUCKLE



316 STAINLESS STEEL

S0108-JJ SERIES:
1/4" through 1-1/2"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS WLL & DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE1, CLASS G. MEETS ASME B30.26.

FORGED JAW AND EYE TURNBUCKLE



316 STAINLESS STEEL

S0109-JE SERIES:
1/4" through 1-1/4"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS WLL & DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1, CLASS H. MEETS ASME B30.26.

FORGED JAW & EYE TURNBUCKLE WITH NUTS




316 STAINLESS STEEL

S0109-JE-DR SERIES:
1/4" through 1-1/4"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS WLL & DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1, CLASS H. MEETS ASME B30.26. SUPPLIED WITH HEX NUTS AND DRILLED TO ACCEPT COTTER PINS.

FORGED EYE AND EYE TURNBUCKLE



316 STAINLESS STEEL

S0107-EE SERIES:
1/4" through 1-1/4"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS WLL AND DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1, CLASS D. MEETS ASME B30.26.

FORGED HOOK AND EYE TURNBUCKLE



316 STAINLESS STEEL

S0110-HE SERIES:
1/4" through 3/4"

FORGED

MEETS WLL & DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1, CLASS F. MEETS ASME B30.26. BODIES AND EYES ARE FORGED. HOOKS ARE FORMED AND COLD FORGED.

FORGED HOOK AND HOOK TURNBUCKLE



316 STAINLESS STEEL

S0111-HH SERIES:
1/4" through 3/4"

FORGED

MEETS WLL AND DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1, CLASS E. BODIES AND EYES ARE FORGED. HOOKS ARE FORMED AND COLD FORGED. MEETS ASME B30.26.

FORGED STUB AND STUB TURNBUCKLE



316 STAINLESS STEEL

S0112-SS SERIES:
1/4" through 1-1/4"

FORGED

*MEETS REQUIREMENTS OF: MIL-DTL-32655 (*EXCLUDING S0112-SS25, S0112-SS25-1 AND S0112-SS32-1). MEETS WLL AND DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1, CLASS C.*

FORGED FULL THREAD TURNBUCKLE



316 STAINLESS STEEL

S0112-TS SERIES:
1/4" through 1"

FORGED

MEETS WLL AND DIMENSIONS OF ASTM SPECIFICATION F1145-05 TYPE 1.

CAST JAW AND JAW TURNBUCKLE WITH NUTS



316 STAINLESS STEEL

S0105-0 SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. JAWS ARE FORMED AND WELDED. THREADS ARE STANDARD UNC.

CAST JAW AND JAW TURNBUCKLE



316 STAINLESS STEEL

S0154-JJ SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. JAWS ARE FORMED AND WELDED. THREADS ARE STANDARD UNC.

**3/16" & 1/4" SIZES FEATURE OPEN BODY WITHOUT THE ADJUSTMENT HOLE.*

CAST JAW AND EYE TURNBUCKLE



316 STAINLESS STEEL

S0154-JE SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. JAW & EYE ARE FORMED AND WELDED. THREADS ARE STANDARD UNC.

**3/16" & 1/4" SIZES FEATURE OPEN BODY WITHOUT THE ADJUSTMENT HOLE.*

CAST EYE AND EYE TURNBUCKLE



316 STAINLESS STEEL

S0154-EE SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. EYES ARE FORMED AND WELDED. THREADS ARE STANDARD UNC.

**3/16" & 1/4" SIZES FEATURE OPEN BODY WITHOUT THE ADJUSTMENT HOLE.*

CAST HOOK AND EYE TURNBUCKLE



316 STAINLESS STEEL

S0154-HE SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. EYES ARE FORMED AND WELDED. THREADS ARE STANDARD UNC.

**3/16" & 1/4" SIZES FEATURE OPEN BODY WITHOUT THE ADJUSTMENT HOLE.*

CAST HOOK AND HOOK TURNBUCKLE



316 STAINLESS STEEL

S0154-HH SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. HOOKS ARE FORMED. THREADS ARE STANDARD UNC.

**3/16" & 1/4" SIZES FEATURE OPEN BODY WITHOUT THE ADJUSTMENT HOLE.*

CAST STUB AND STUB TURNBUCKLE



316 STAINLESS STEEL

S0154-SS SERIES:
3/16" through 3/4"

ECONOMICAL, YET HIGH QUALITY TURNBUCKLE WITH PRECISION CAST BODY. THREADS ARE STANDARD UNC.

**3/16" & 1/4" SIZES FEATURE OPEN BODY WITHOUT THE ADJUSTMENT HOLE.*

JAW AND JAW TURNBUCKLE, CLOSED BODY



316 STAINLESS STEEL

S0101-0 SERIES:
3/16" through 1/2"

THIS CLOSED TYPE TURNBUCKLE IS IDEAL FOR ARCHITECTURAL APPLICATIONS. BODY IS MACHINED FROM TUBING. JAWS ARE FORMED AND WELDED. THREADS ARE STANDARD UNC.
**S0101-0016 IS METRIC THREADED (16MM).*

TURNBUCKLE JAW AND SWAGE STUD, CLOSED BODY



316 STAINLESS STEEL

S0781-0 SERIES:
1/4" through 3/4"

OTHER CONFIGURATIONS ARE AVAILABLE.
THREADS ARE UNF. MACHINE SWAGE ONLY.

TURNBUCKLE TOGGLE AND SWAGE STUD, CLOSED BODY



316 STAINLESS STEEL

S0782-0 SERIES:
3/16" through 5/8"

OTHER CONFIGURATIONS ARE AVAILABLE.
THREADS ARE UNF. MACHINE SWAGE ONLY.

TOGGLE AND TOGGLE TURNBUCKLE, CLOSED BODY



316 STAINLESS STEEL

S0783-0 SERIES:
3/16" through 5/8"

THIS TURNBUCKLE IS IDEAL FOR ARCHITECTURAL AND MARINE APPLICATIONS. BODY IS MACHINED FROM TUBING. TOGGLES ARE FORMED. THREADS ARE UNF.

TURNBUCKLE TOGGLE AND SWAGE STUD, OPEN BODY



CHROMED BRONZE BODY & STAINLESS ENDS

S0786-0 SERIES:
1/4" through 3/4"

FORGED

THREADS ARE UNF. MACHINE SWAGE ONLY.

TOGGLE AND TOGGLE TURNBUCKLE, OPEN BODY



CHROMED BRONZE BODY & STAINLESS ENDS

S0785-0 SERIES:
1/4" through 5/16"

FORGED

SILICON BRONZE, THEN CHROMED TO PREVENT GALLING. END FITTINGS ARE MADE FROM 316 STAINLESS STEEL. UNF THREADS.

EYE AND EYE TURNBUCKLE



ALUMINUM BODY & STAINLESS STEEL ENDS

A0154-EE SERIES:
3/16" through 3/8"

LOWEST COST TURNBUCKLE. BODY IS ALUMINUM; ENDS ARE 304 STAINLESS STEEL. TO BE USED IN LIGHT DUTY APPLICATIONS ONLY. UNC THREAD.

HOOK AND HOOK TURNBUCKLE



ALUMINUM BODY & STAINLESS STEEL ENDS

A0154-HH SERIES:
3/16" through 3/8"

LOWEST COST TURNBUCKLE. BODY IS ALUMINUM; ENDS ARE 304 STAINLESS STEEL. TO BE USED IN LIGHT DUTY APPLICATIONS ONLY. UNC THREAD.

TURNBUCKLE WALL MOUNT AND SWAGE STUD, CLOSED BODY



316 STAINLESS STEEL

S0784-0 SERIES:
1/8" through 3/16"

THREADS ARE UNF. MACHINE SWAGE ONLY. TURNBUCKLES WITH QUICK ATTACH™ FITTINGS ARE AVAILABLE.

TURNBUCKLE TOGGLE AND SWAGE STUD, OPEN BODY



BRONZE BODY & STAINLESS ENDS

S0789-0 SERIES:
1/4" through 1/2"

FORGED

THREADS ARE UNF. OTHER CONFIGURATIONS, SUCH AS TOGGLE/TOGGLE ARE AVAILABLE.

JAW AND JAW TURNBUCKLE, OPEN BODY



CHROMED BRONZE BODY & ENDS

S0787-0 SERIES:
1/4" through 5/8"

FORGED

COMPLETE TURNBUCKLE IS FORGED SILICONE BRONZE, THEN CHROMED TO PREVENT GALLING. THREADS ARE UNF.

HOOK AND EYE TURNBUCKLE



ALUMINUM BODY & STAINLESS STEEL ENDS

A0154-HE SERIES:
3/16" through 3/8"

LOWEST COST TURNBUCKLE. BODY IS ALUMINUM; ENDS ARE 304 STAINLESS STEEL. TO BE USED IN LIGHT DUTY APPLICATIONS ONLY. UNC THREAD.

UNIVERSAL LINK






316 STAINLESS STEEL

S0100-0 SERIES:
1/4" through 1/2"

DESIGNED FOR LINKING COMPONENTS WITH MATCHING PIN DIAMETERS. EASILY CONNECT JAWS, SHACKLES, TOGGLES, YOKE ENDS, ETC. SIZE = HOLE DIAMETERS.

TURNBUCKLE BODY, CLOSED, UNC THREAD



316 STAINLESS STEEL

P0101-BD SERIES:
3/16" through 1"

MULTIPLE CONFIGURATIONS AVAILABLE FOR USE WITH THIS BODY.

TURNBUCKLE BODY, CLOSED, UNF THREAD




316 STAINLESS STEEL

P0780-BD SERIES:
3/16" through 1"

MULTIPLE CONFIGURATIONS AVAILABLE FOR USE WITH THIS BODY.

FORGED TURNBUCKLE BODY



316 STAINLESS STEEL

S0106-BD SERIES:
1/4" through 1-1/2"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS WLL & DIMENSIONS OF ASTM SPECIFICATION F1145-92, TYPE 1.

CAST TURNBUCKLE BODY, OPEN, UNC THREAD



316 STAINLESS STEEL

P0105-BD SERIES:
3/16" through 3/4"

MULTIPLE CONFIGURATIONS AVAILABLE FOR USE WITH THIS BODY.

TURNBUCKLE TOGGLE, UNF THREAD



316 STAINLESS STEEL

P0780-RT & P0780-LT SERIES:
3/16" through 5/8"

USE WITH "CLOSED" TURNBUCKLE BODY (P0780-BD).

TURNBUCKLE WALL TOGGLE, UNF THREAD



316 STAINLESS STEEL

P0776-WT SERIES:
1/4" through 3/8"

USE WITH "CLOSED" TURNBUCKLE BODY (P0780-BD).

FORGED TURNBUCKLE EYE, UNC THREAD



316 STAINLESS STEEL

P0106-RE & P0106-LE SERIES:
1/4" through 1-1/4"

FORGED

USE WITH FORGED "OPEN" TURNBUCKLE BODY (S0106-BD).

FORGED TURNBUCKLE JAW, UNC THREAD



316 STAINLESS STEEL

P0106-RJ & P0106-LJ SERIES:
1/4" through 1-1/4"

FORGED

USE WITH FORGED "OPEN" TURNBUCKLE BODY (S0106-BD).

FORGED TURNBUCKLE STUB, UNC THREAD




316 STAINLESS STEEL

P0106-RS & P0106-LS SERIES:
3/16" through 1"

FORGED

USE WITH FORGED "OPEN" TURNBUCKLE BODY (S0106-BD).

TURNBUCKLE STUD, UNC THREAD



316 STAINLESS STEEL

P0106-RT & P0106-LT SERIES:
1/4" through 1"

USE WITH FORGED "OPEN" TURNBUCKLE BODY (S0106-BD).

TURNBUCKLE EYE, UNC THREAD



316 STAINLESS STEEL

P0154-RE & P0154-LE SERIES:
3/16" through 3/4"

USE WITH "OPEN" TURNBUCKLE BODY (P0105-BD).

TURNBUCKLE JAW, UNC THREAD



316 STAINLESS STEEL

P0101-RJ & P0101-LJ SERIES:
3/16" through 1/2"

USE WITH "CLOSED" TURNBUCKLE BODY (P0101-BD).

TURNBUCKLE JAW, UNF THREAD



316 STAINLESS STEEL

P0780-RJ & P0780-LJ SERIES:
3/16" through 5/8"

USE WITH "CLOSED" TURNBUCKLE BODY (P0780-BD).

TOGGLE AND HAND SWAGE STUD – OPEN BODY



CHROMED BRONZE & STAINLESS ENDS

S0786-H SERIES:
1/8" & 3/16"

FORGED

DESIGNED FOR HAND SWAGE USE ONLY. THE OPEN BODY TURNBUCKLE COMBINES CHROMED BRONZE WITH GRADE 316 STAINLESS STEEL. ALSO AVAILABLE WITH SILICON BRONZE BODY.

WALL MOUNT AND HAND SWAGE STUD – CLOSED BODY



316 STAINLESS STEEL

S0784-H SERIES:
1/8" & 3/16"

DESIGNED FOR HAND SWAGE USE ONLY. CRIMP THE HAND SWAGE STUD ONTO THE WIRE ROPE USING THE HAND SWAGER (PART # E0113-H600) OR BENCH SWAGER (PART # E0115-H600).

TURNBUCKLE HOOK, UNC THREAD



316 STAINLESS STEEL

SERIES: P0154-RH & P0154-LH
3/16" through 3/4"

USE WITH "OPEN" TURNBUCKLE BODY (P0105-BD).

TURNBUCKLE JAW, UNC THREAD



316 STAINLESS STEEL

P0105-RJ & P0105-LJ SERIES:
3/16" through 3/4"

USE WITH "CLOSED" TURNBUCKLE BODY (P0105-BD).

TOGGLE AND HAND SWAGE STUD – CLOSED BODY



316 STAINLESS STEEL

S0782-H SERIES:
1/8" & 3/16"

DESIGNED FOR HAND SWAGE USE ONLY. THIS TURNBUCKLE FEATURES A CLOSED STYLE BODY WITH PRECISION MANUFACTURED END FITTINGS. CRIMP THE HAND SWAGE STUD ONTO THE WIRE ROPE USING THE HAND SWAGER (PART # E0113-H600) OR BENCH SWAGER (PART # E0115-H600).

GATE EYE AND HAND SWAGE STUD – CLOSED BODY



316 STAINLESS STEEL

S0794-H SERIES:
1/8" & 3/16"

DESIGNED FOR HAND SWAGE USE ONLY. THIS TURNBUCKLE FEATURES A CLOSED STYLE BODY WITH PRECISION MANUFACTURED END FITTINGS. CRIMP THE HAND SWAGE STUD ONTO THE WIRE ROPE USING THE HAND SWAGER (PART # E0113-H600) OR BENCH SWAGER (PART # E0115-H600).

WALL MOUNT AND HAND SWAGE STUD – OPEN BODY



CHROMED BRONZE & STAINLESS ENDS

S0798-H SERIES:
1/8" & 3/16"

FORGED

DESIGNED FOR HAND SWAGE USE ONLY. THE OPEN BODY TURNBUCKLE COMBINES CHROMED BRONZE WITH GRADE 316 STAINLESS STEEL. ALSO AVAILABLE WITH SILICON BRONZE BODY. USE THE HAND SWAGER (PART # E0113-H600) OR BENCH SWAGER (PART # E0115-H600).

HAND SWAGE STUD AND STUD – CLOSED BODY



316 STAINLESS STEEL

S0796-H SERIES:
1/8" & 3/16"

THIS TURNBUCKLE FEATURES A CLOSED STYLE BODY WITH PRECISION MANUFACTURED END FITTINGS. CRIMP THE HAND SWAGE STUDS ONTO THE WIRE ROPE USING THE HAND SWAGER (PART # E0113-H600) OR BENCH SWAGER (PART # E0115-H600).

HAND SWAGE STUD AND STUD – OPEN BODY



CHROMED BRONZE & STAINLESS ENDS

S0797-H SERIES:
1/8" & 3/16"

FORGED

DESIGNED FOR HAND SWAGE USE ONLY. THE OPEN BODY TURNBUCKLE COMBINES CHROMED BRONZE WITH GRADE 316 STAINLESS STEEL. ALSO AVAILABLE WITH SILICON BRONZE BODY. CRIMP THE HAND SWAGE STUDS ONTO THE WIRE ROPE USING THE HAND SWAGER (PART # E0113-H600) OR BENCH SWAGER (PART # E0115-H600).

HAND SWAGER



FOR USE WITH HAND SWAGE STUD SERIES ONLY

E0113-H600
24"

MAKE HAND SWAGING QUICK AND EASY USING SUNCOR'S HAND SWAGER. SWAGES 1/8", 5/32" AND 3/16". HAND SWAGER CRIMPS THE HAND SWAGE STUDS ONTO WIRE ROPE. AFTER SWAGE GAUGE INCLUDED.

BENCH SWAGER



FOR USE WITH HAND SWAGE STUD SERIES ONLY

E0115-H600
24"

MAKE HAND SWAGING QUICK AND EASY USING SUNCOR'S BENCH SWAGER. BENCH SWAGER CRIMPS THE HAND SWAGE STUDS ONTO THE WIRE ROPE. WAGES 1/8", 5/32" AND 3/16". AFTER SWAGE GAUGE INCLUDED.

QUICK ATTACH™ STUD AND TOGGLE



316 STAINLESS STEEL

S0764-0 SERIES:
1/8" through 3/8"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED. SEE THE QUICK ATTACH™ SECTION FOR FULL OFFERINGS.

QUICK ATTACH™ STUD AND JAW



316 STAINLESS STEEL

S0765-0 SERIES:
1/8" through 3/8"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED. SEE THE QUICK ATTACH™ SECTION FOR FULL OFFERINGS.

QUICK ATTACH™ STUD AND WALL TOGGLE



316 STAINLESS STEEL

S0766-0 SERIES:
1/8" through 1/4"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED. SEE THE QUICK ATTACH™ SECTION FOR FULL OFFERINGS.

LIFELINE ADJUSTER



316 STAINLESS STEEL

S0745-0 SERIES:
1/8" through 3/16"

TENSIONER DESIGNED FOR, BUT NOT LIMITED TO, LIFELINE APPLICATIONS. MACHINE SWAGE ONLY. HAND SWAGE OPTION ALSO AVAILABLE IN THE SWAGE HARDWARE SECTION.

PRODUCTS FREQUENTLY PURCHASED WITH TURNBUCKLES:


PG. 37

STANDARD THIMBLE
S0124-0 SERIES


PG. 38

WIRE ROPE 1 X 19
S0701-0 SERIES


PG. 38

WIRE ROPE 7 X 19
S0703-0 SERIES


PG. 38

WIRE ROPE CLIP
S0122-SS SERIES

SUNCOR STAINLESS, INC.

TIE RODS

STAINLESS STEEL TIE RODS

Built for strength and corrosion resistance, the new Industrial Tie Rod line delivers dependable support for marine, industrial and structural applications. Manufactured from 316 stainless steel, these assemblies are available in a variety of configurations with adjustable turnbuckle options, custom rod lengths and matching mounting hardware to fit a wide range of projects.

INTRODUCING

Suncor's New Industrial Tie Rod Series

Structural Support Starts Here

316 STAINLESS STEEL

7 STANDARD CONFIGURATIONS

INDUSTRIAL & ARCHITECTURAL



UP TO 24' OR CUSTOM LENGTHS



WLL 500 - 8,000 lbs



OPEN OR CLOSED BODY STYLES



Ideal for:

- ✓ Canopies
- ✓ Building Construction
- ✓ Marine Structures
- ✓ Retaining Walls
- ✓ Bridges
- ✓ Laboratory & Medical Use
- ✓ Industrial

Visit www.suncorstainless.com to learn more about our new tie rod series!


ADJUSTABLE YOKE (YKO)



316 STAINLESS STEEL **S0790-N SERIES:** 1/4" through 1"

STREAMLINED SHORT STROKE SYSTEM IDEAL FOR CANOPIES OR APPLICATIONS REQUIRING MINIMUM TAKE-UP ADJUSTMENT. FORGED YOKES. CUSTOM LENGTHS AVAILABLE.


TURNBUCKLE ON CENTER (TOC), OPEN BODY

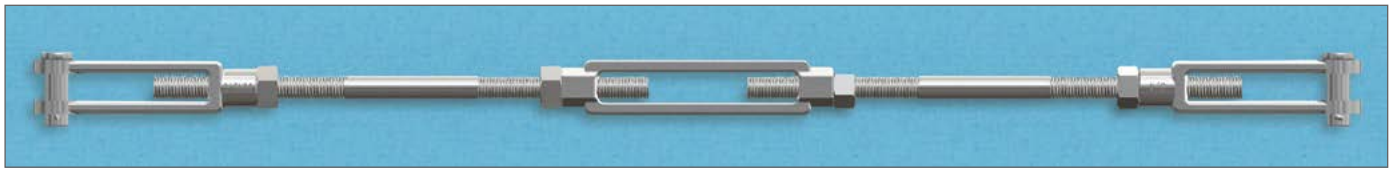

316 STAINLESS STEEL **S0790-1C SERIES:** 1/4" through 1"

SYMMETRICAL STYLE WITH OPEN TURNBUCKLE ON CENTER. IDEAL FOR BUILDING TIE ROD TO RETAIN WALLS. FORGED YOKES AND TURNBUCKLE BODIES. CUSTOM LENGTHS AVAILABLE.


TURNBUCKLE ON ONE END (TOE), OPEN BODY

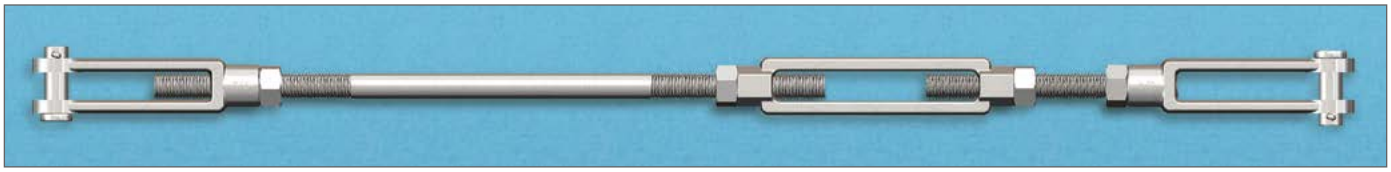

316 STAINLESS STEEL **S0790-1E SERIES:** 1/4" through 1"

ASYMMETRICAL STYLE WITH OPEN TURNBUCKLE ON ONE END. IDEAL FOR VERTICAL OR ANGLE INSTALLATIONS WHERE TURNBUCKLE ACCESS IS REQUIRED ON LOWER ENDS. FORGED YOKES AND TURNBUCKLE BODIES. CUSTOM LENGTHS AVAILABLE.


TURNBUCKLE ON BOTH ENDS (TBE), OPEN BODY

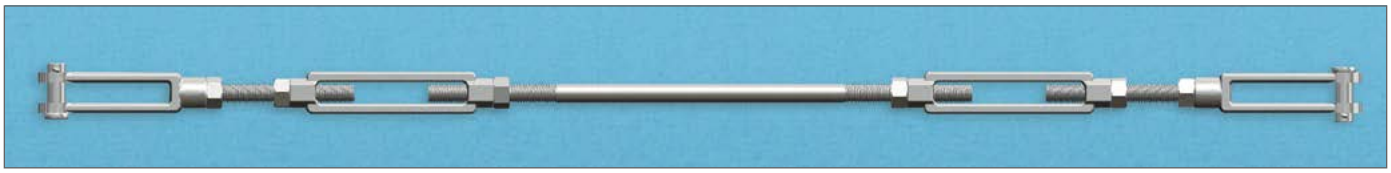

316 STAINLESS STEEL **S0790-2E SERIES:** 1/4" through 1"

DUAL TURNBUCKLE STYLE WITH OPEN BODY TURNBUCKLE ON BOTH ENDS FOR ADJUSTMENT ACCESS ON EITHER END AND TWICE THE STROKE ADJUSTMENT FOR LONG TAKE-UP ADJUSTMENTS. PULL STRUCTURES IN LINE. FORGED YOKES AND TURNBUCKLE BODIES. CUSTOM LENGTHS AVAILABLE.

TURNBUCKLE ON CENTER (TOC), CLOSED BODY

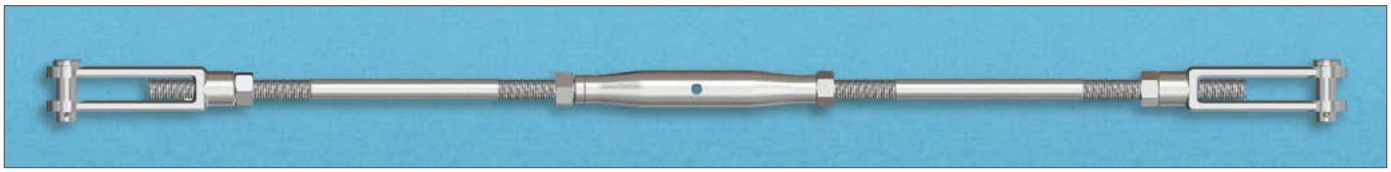

316 STAINLESS STEEL **S0792-1C SERIES:** 1/4" through 1"

SYMMETRICAL STYLE WITH STREAMLINED CLOSED TURNBUCKLE ON CENTER. IDEAL FOR BUILDING TIE ROD TO RETAIN WALLS. FORGED YOKES AND MACHINED TUBULAR TURNBUCKLE BODIES. CUSTOM LENGTHS AVAILABLE.


TURNBUCKLE ON ONE END (TOE), CLOSED BODY



316 STAINLESS STEEL **S0792-1E SERIES:** 1/4" through 1"

ASYMMETRICAL STYLE WITH STREAMLINED CLOSED TURNBUCKLE ON ONE END. IDEAL FOR VERTICAL OR ANGLE INSTALLATIONS WHERE TURNBUCKLE ACCESS IS REQUIRED ON LOWER ENDS. FORGED YOKES AND MACHINED TUBULAR TURNBUCKLE BODIES. CUSTOM LENGTHS AVAILABLE.

TURNBUCKLE ON BOTH ENDS (TBE), CLOSED BODY

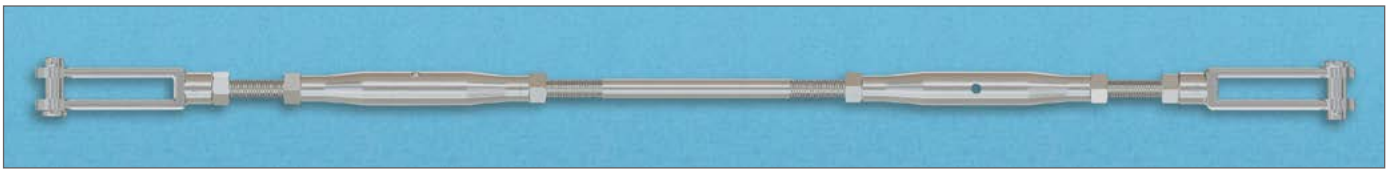

316 STAINLESS STEEL **S0792-2E SERIES:** 1/4" through 1"

DUAL TURNBUCKLE STYLE WITH STREAMLINED CLOSED BODY TURNBUCKLE ON BOTH ENDS FOR ADJUSTMENT ACCESS ON EITHER END AND TWICE THE STROKE ADJUSTMENT FOR LONG TAKE-UP ADJUSTMENTS. PULL STRUCTURES IN LINE. FORGED YOKES AND MACHINED TUBULAR TURNBUCKLE BODIES. CUSTOM LENGTHS AVAILABLE.

COUPLING (RH-RH), UNC



316 STAINLESS STEEL

S0790-CRR SERIES:
1/4" through 1"

USED TO CONNECT RIGHT-HAND TO RIGHT-HAND THREADED ROD ENDS FOR LENGTHS OVER 12 FEET. MACHINED FROM HEX STOCK.

COUPLING (RH-LH), UNC



316 STAINLESS STEEL

S0790-CRL SERIES:
1/4" through 1"

USED TO CONNECT RIGHT-HAND TO LEFT-HAND THREADED ROD ENDS FOR LENGTHS OVER 12 FEET. MACHINED FROM HEX STOCK.

MOUNTING LUG - BOLT ON



316L STAINLESS STEEL

S0790-BL SERIES:
1/4" through 1"

BOLTS ONTO FLAT SURFACES AND MATES WITH YOKE ENDS TO ANCHOR TIE ROD ASSEMBLY. UNIVERSAL 180-DEGREE TIE ROD ATTACHMENT ARTICULATION WITH ONE FITTING.

MOUNTING LUG - WELD ON



316L STAINLESS STEEL

S0790-WL SERIES:
1/4" through 1"

WELDS ONTO STAINLESS STEEL STRUCTURES AND MATES WITH YOKE ENDS TO ANCHOR TIE ROD ASSEMBLY. UNIVERSAL 180-DEGREE TIE ROD ATTACHMENT ARTICULATION WITH ONE FITTING.

CENTER DISK - 3 HOLE



316L STAINLESS STEEL

S0790-CD3 SERIES:
1/4" through 1"

PROVIDES THREE-WAY TIE ROD ATTACHMENT CONNECTING LINK.


CENTER DISK - 4 HOLE



316L STAINLESS STEEL

S0790-CD4 SERIES:
1/4" through 1"

PROVIDES FOUR-WAY TIE ROD ATTACHMENT CONNECTING LINK.

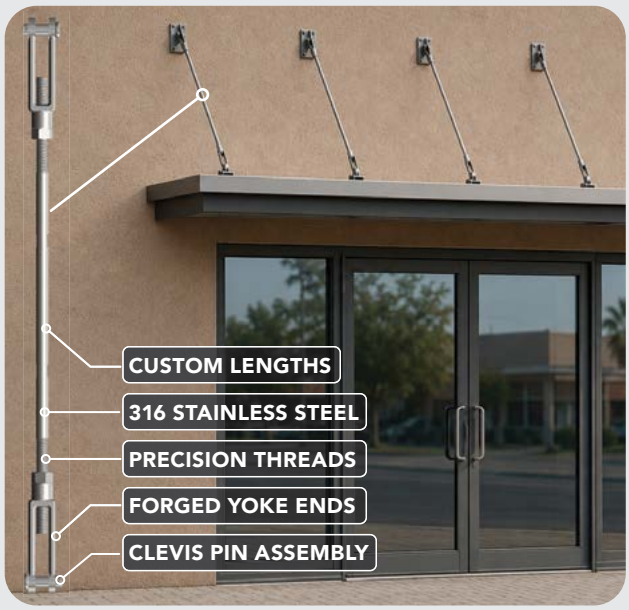

ORDER TIE RODS IN
3 EASY STEPS!

CONTACT YOUR SUNCOR STAINLESS SALES REP WITH THE FOLLOWING INFORMATION:

STEP 1: CONFIGURATION — Select your part number, size/load capacity, Tie Rod Series, and Turnbuckle Body Style. Include your precise mid-stroke (half stroke) Pin-to-Pin length.

STEP 2: QUANTITY & HARDWARE — Specify your total number of assemblies required and select any required matching mounting or rigging hardware options.

STEP 3: SCHEDULE — Indicate your required on-site delivery date to finalize the request.

SUNCOR WILL HAVE A QUOTE BACK TO YOU WITHIN 1 BUSINESS DAY.

EYE BOLTS

STAINLESS STEEL EYE BOLTS

Suncor Stainless manufactures an extensive line of stainless steel eye bolts in 228 different variations. The eye bolts range in size from 3/16" to 1" and 5mm to 24mm. They feature a variety of styles including welded, unwelded, ring, plain and shoulder. Custom eye bolts are also available to fit specific dimensional needs and are available in 1/4" – 1" and up to 4' in length.

UNWELDED EYE BOLT



304 STAINLESS STEEL

S0310-0 SERIES:
3/16" x 1" through 3/4" x 12"

ALL THREADS ARE STANDARD UNC. ONE NUT IS INCLUDED. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. CUSTOM SIZES AVAILABLE.

UNWELDED EYEBOLT



316 STAINLESS STEEL

S0310-X SERIES:
#6 x .75" through 3/4" x 12"

ALL THREADS ARE STANDARD UNC. ONE NUT IS INCLUDED. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. CUSTOM SIZES AVAILABLE.

WELDED EYE BOLT



304 STAINLESS STEEL

S0312-0 SERIES:
3/16" x 1" through 1/2" x 6"

ALL THREADS ARE STANDARD UNC. ONE NUT AND TWO WASHERS ARE INCLUDED. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. CUSTOM SIZES AVAILABLE.

WELDED EYE BOLT



316 STAINLESS STEEL

S0312-X SERIES:
1/2" x 3" through 1/2" x 6"
More sizes coming soon.

ALL THREADS ARE STANDARD UNC. ONE NUT AND TWO WASHERS ARE INCLUDED. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. CUSTOM SIZES AVAILABLE.

METRIC WELDED EYE BOLT



304 STAINLESS STEEL

S0313-0 SERIES:
5mm x 2.25" through 12mm x 6"

ALL THREADS ARE METRIC. ONE NUT AND TWO WASHERS ARE INCLUDED. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK.

SHOULDER EYE BOLT



316 STAINLESS STEEL

S0314-0 SERIES:
1/4" x 2" through 1" x 6"
FORGED

MEETS ASME B30.26. ALL THREADS ARE UNC. ONE NUT AND WASHER ARE INCLUDED. SHAFT AND UNDERSIDE OF SHOULDER ARE MACHINED FOR PERFECT FIT AND SEATING.

METRIC SHOULDER EYE BOLT



316 STAINLESS STEEL

S0314-M SERIES:
M6 x 2" through M24 x 6"
FORGED

MEETS ASME B30.26. ALL THREADS ARE METRIC. ONE NUT AND WASHER ARE INCLUDED. SHAFT AND UNDERSIDE OF SHOULDER ARE MACHINED FOR PERFECT FIT AND SEATING.

PLAIN EYE BOLT



316 STAINLESS STEEL

S0315-0 SERIES:
1/4" x 2" through 1" x 6"
FORGED

MEETS ASME B30.26. ALL THREADS ARE UNC. ONE NUT AND WASHER ARE INCLUDED. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. SHAFT IS MACHINED FOR PERFECT FIT AND SEATING.

METRIC PLAIN EYE BOLT



316 STAINLESS STEEL

S0315-M SERIES:
M6 x 2" through M24 x 6"

FORGED

MEETS ASME B30.26. ALL THREADS ARE METRIC. ONE NUT AND WASHER ARE INCLUDED. SHAFT IS MACHINED FOR PERFECT FIT AND SEATING.

CUSTOM EYE BOLT



316 STAINLESS STEEL

S0125-SP SERIES:
1/4" through 1"

MADE IN USA

WE CAN MAKE CUSTOM EYE BOLTS TO FIT YOUR SPECIFIC NEEDS. SELECT AN EYE BOLT FROM THE ITEM NUMBERS LISTED AND SIMPLY SPECIFY THE DESIRED SHANK LENGTH WHEN ORDERING.

PLAIN EYE RIVET



316 STAINLESS STEEL

S0315-R SERIES:
1/2" x 1.5" through 1/2" x 3.25"

FORGED

OTHER SIZES ARE AVAILABLE ON SPECIAL ORDER. SEE PLAIN EYE BOLTS FOR SPECIAL SIZES. EYE RIVETS HAVE FORGED MARKINGS OF 316-NM, SIZE AND WLL IN TONS. SHAFT IS MACHINED FOR PERFECT FIT.

ROD END BLANK



304 STAINLESS STEEL

S0360-0 SERIES:
3/8" x 3" through 1" x 10"

FORGED

MACHINE EYE BOLT



316 STAINLESS STEEL

S0316-0 SERIES:
1/4" x .5" through 1" x 1.5"

THREADS ARE UNC.

HEAVY DUTY SPECIAL EYE BOLT



316 STAINLESS STEEL

S0319-0 SERIES:
1/4" x 2" through 1" x 18"

EYE BOLTS ARE FULLY THREADED WITH STANDARD UNC THREAD. ONE NUT AND WASHER ARE INCLUDED.

LAG EYE SCREW



304 STAINLESS STEEL

S0327-0 SERIES:
5/32" x .75" through 3/8" x 2.5"

WOOD TYPE THREADS. THE WORKING LOAD HAS NOT BEEN ESTABLISHED SINCE IT DEPENDS ON THE WOOD, HOLE AND INSTALLATION.

SHOULDER EYE RIVET



316 STAINLESS STEEL

S0314-R SERIES:
1/2" x 1.5" through 1/2" x 3.25"

FORGED

OTHER SIZES AVAILABLE ON SPECIAL ORDER. EYE RIVETS HAVE FORGED MARKINGS OF 316- NM, SIZE AND WLL IN TONS. UNDERSIDE OF SHOULDER AND SHAFT ARE MACHINED FOR PERFECT SEATING AND FIT.

CUSTOM ROD END



304 STAINLESS STEEL

S0360-SP SERIES:
3/8" x 3" through 1" x 10"

FORGED

CUSTOM THREADED TO LENGTH AND DRILLED TO DESIRED EYE DIAMETER.

LAG RING BOLT



304 STAINLESS STEEL

S0329-0 SERIES:
1/4" x 2.25" through 1/2" x 4.75"

WOOD TYPE THREADS. THE WORKING LOAD HAS NOT BEEN ESTABLISHED SINCE IT DEPENDS ON THE WOOD, HOLE AND INSTALLATION.

SHOULDER RING BOLT



316 STAINLESS STEEL

S0330-0 SERIES:
1/4" x 2" through 3/4" x 6"

FORGED

DROP FORGED EYE BOLT WITH WELDED RING; ALL THREADS ARE STANDARD UNC; ONE NUT AND ONE WASHER ARE INCLUDED.

PLAIN RING BOLT



316 STAINLESS STEEL

S0331-0 SERIES:
1/4" x 2" through 1/2" x 3.25"

WELDED EYE BOLT WITH WELDED RING; ALL THREADS ARE STANDARD UNC; ONE NUT AND ONE WASHER ARE INCLUDED.

PAD EYE



316 STAINLESS STEEL

S0324-0 SERIES:
3/16" through 3/4"

FORGED

WLL IS DEPENDENT ON QUALITY OF THE WELDING AND ATTACHED STRUCTURE. PAD EYES HAVE FORGED MARKINGS OF 316-NM AND SIZE. UNDERSIDE IS MACHINED FOR PERFECT SEATING.

EYE END



316 STAINLESS STEEL

S0318-0 SERIES:
1/4" through 5/8"

FORGED

ALL THREADS ARE STANDARD UNF. EYE IS FORGED AND MACHINED.

EYE NUT



316 STAINLESS STEEL

S0321-0 SERIES:
1/4" through 1"

UNC THREADED.

EYE NUT BLANK



316 STAINLESS STEEL

S0321-U SERIES:
1/4" through 1"

UNTHREADED EYE NUT CAN BE WELDED INTO PLACE, USED TO MAKE A SWIVEL ASSEMBLY OR CUSTOM THREADED TO FIT YOUR APPLICATION. SUNCOR OFFERS THREADING SERVICES.

LIFTING EYE NUT



316 STAINLESS STEEL

S0322-0 SERIES:
1/4" through 3/4"

FORGED

MEETS ASME B30.26. UNDERSIDE OF SHOULDER IS MACHINED FOR PERFECT SEATING. EYE NUTS HAVE FORGED MARKINGS OF 316-NM, SIZE AND WLL IN TONS. ALL THREADS ARE UNC.

METRIC LIFTING EYE NUT



316 STAINLESS STEEL

S0322-M SERIES:
M6 through M18

FORGED

MEETS ASME B30.26. UNDERSIDE OF SHOULDER IS MACHINED FOR PERFECT SEATING. EYE NUTS HAVE FORGED MARKINGS OF 316-NM, SIZE AND WLL IN TONS. ALL THREADS ARE METRIC.

PRODUCTS FREQUENTLY PURCHASED WITH EYE BOLTS:


PG. 2

NACM INDUSTRIAL CHAIN
S0602-0 SERIES


PG.37

FED. SPEC THIMBLE
S0123-FS SERIES


PG. 38

WIRE ROPE CLIP
S0122-FS SERIES


PG.61

HEX NUT
S0302-0 SERIES

SUNCOR STAINLESS, INC.

LIFTING HOOKS

STAINLESS STEEL LIFTING HOOKS

Suncor Stainless manufactures a full range of high quality marine grade 316 stainless steel hooks ranging from 1/4" up to 1". These hooks are compatible with Suncor's additional forged lifting products such as master links, chain, connecting links and swivels. Heavy duty hooks are typically used in marine and industrial applications, food and dairy processing facilities and environments with caustic solutions.

CLEVIS GRAB HOOK



316 STAINLESS STEEL

S0451-0 SERIES:
1/4" through 1/2"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. INCLUDES REMOVABLE CLEVIS PIN. FOR CHAIN SLING ASSEMBLIES.

EYE GRAB HOOK



316 STAINLESS STEEL

S0453-0 SERIES:
1/4" through 1/2"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. FOR CHAIN SLING ASSEMBLIES.

CLEVIS SLIP HOOK



316 STAINLESS STEEL

S0452-0 SERIES:
1/4" through 1/2"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. INCLUDES REMOVABLE LATCH AND CLEVIS PIN. FOR CHAIN SLING ASSEMBLIES.

EYE SLIP HOOK



316 STAINLESS STEEL

S0454-0007 THROUGH S0454-0013:
1/4" through 1/2"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. FOR CHAIN SLING ASSEMBLIES.

EYE SLIP HOOK - LARGE



316 STAINLESS STEEL

S0454-0016 THROUGH S0454-0025:
5/8" through 1"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. "I" BEAM DESIGN INCREASES LOAD BEARING SURFACE.

EYE SLIP HOOK LATCH KIT



316 STAINLESS STEEL

Z0454-L SERIES:
For Hook Sizes 1/4" through 1"

COMPATIBLE WITH S0454 SERIES EYE SLIP HOOKS.

HEAVY DUTY SWIVEL EYE HOOK



316 STAINLESS STEEL

S0457-0 SERIES:
1.24" through 1.69"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. HEAVY DUTY SWIVEL HOOK WITH DROP FORGED COMPONENTS. LOAD RATED. INCLUDES REMOVABLE SAFETY LATCH.

THREADED SHANK HOOK, CUSTOM



316 STAINLESS STEEL

S0456-SP SERIES:
UNF & UNC: ½" through 7/8"
METRIC: 13mm through 22mm

FORGED

MEETS THE REQUIREMENTS OF MIL-DTL-32655. MEETS ASME B30.10. LOAD RATED. HEAVY DUTY SHANK HOOK. INCLUDES REMOVABLE SAFETY LATCH. CUSTOM THREADS AVAILABLE IN UNF, UNC AND METRIC.

SHANK HOOK



316 STAINLESS STEEL

S0456-0 SERIES:
1/2" through 7/8"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. LOAD RATED. HEAVY DUTY SHANK HOOK. INCLUDES REMOVABLE SAFETY LATCH. CUSTOM THREADS AVAILABLE IN UNF, UNC AND METRIC.

GRAB HOOK - BOLT ON



316 STAINLESS STEEL

S0459-GB SERIES:
1/4" through 1/2"

FORGED

UNIVERSAL BACKING PLATE WITH MATCHING HOLE PATTERN (S0459-UB SERIES). PAT. US 12,286,997.

SLIP HOOK - BOLT ON



316 STAINLESS STEEL

S0459-SB SERIES:
1/4" through 1/2"

FORGED

UNIVERSAL BACKING PLATE WITH MATCHING HOLE PATTERN (S0459-UB SERIES).

EYE HOOK



316 STAINLESS STEEL

S0194-0 SERIES:
3/4" and 1-1/8"

WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. INCLUDES REMOVABLE SAFETY LATCH.

SWIVEL EYE HOOK LATCH KIT



316 STAINLESS STEEL

Z0455-L SERIES:
For Hook Sizes 4" through 8"

COMPATIBLE WITH S0455 SERIES SWIVEL EYE HOOKS.

THREADED SHANK HOOK



316 STAINLESS STEEL

S0458-0 SERIES:
1/2"-13 through 7/8"-9

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.10. LOAD RATED. HEAVY DUTY SHANK HOOK. INCLUDES REMOVABLE SAFETY LATCH. STANDARD UNC THREADS.

GRAB HOOK - WELD ON



316 STAINLESS STEEL

S0459-G SERIES:
1/4" through 1/2"

FORGED

WORKING LOAD LIMIT DEPENDS ON QUALITY OF WELD ATTACHING THE BASE. PAT. US 12,286,997.

SLIP HOOK - WELD ON



316 STAINLESS STEEL

S0459-S SERIES:
1/4" through 1/2"

FORGED

WORKING LOAD LIMIT DEPENDS ON QUALITY OF WELD ATTACHING THE BASE.

SWIVEL EYE HOOK



316 STAINLESS STEEL

S0455-0 SERIES:
4" through 8"

LIGHT DUTY SWIVEL HOOK. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. INCLUDES REMOVABLE LATCH. STAMPED WITH SIZE AND WORKING LOAD.

FREQUENTLY PURCHASED WITH LIFTING HOOKS:


PG. 2

GRADE 50 LIFTING CHAIN
S0603-0 SERIES


PG. 31

JAW & JAW SWIVEL
S0156-FS SERIES

TIE-DOWN RINGS & PAD EYES

STAINLESS STEEL TIE-DOWN RINGS & PAD EYES

Suncor manufactures one of the most extensive and versatile product lines of tie-down rings and pad eyes. With a variety of stainless steel tie-down rings, stainless steel pad eyes, stainless steel backing plates and stainless steel tow eyes, you are guaranteed to find a product to fit any marine, industrial, architectural, OEM or government application.

INTRODUCING

Suncor's New Tie-Down Ring Series

Tough. Compact. Ready.



MARINE-GRADE DURABILITY
Resists rust, salt, and harsh environments

SPACE-SAVING DESIGN
Folds flush when not in use

HIGH STRENGTH
Engineered for heavy loads

MULTIPLE MOUNTING OPTIONS
Bolt-on, surface or recessed

BUILT TO LAST

Perfect for:

- ✓ Cargo & Freight
- ✓ Industrial & Aerospace
- ✓ Trailers
- ✓ Boats & Docks
- ✓ Use With Suncor Tie-Down Straps

Visit www.suncorstainless.com to learn more about our new tie-down ring series!

D RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-D SERIES:
1/8" through 1/2"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

RECTANGLE RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-R SERIES:
1/8" through 1/2"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

TRIANGLE RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-T SERIES:
1/8" through 1/2"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

D RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-D SERIES:
1/8" through 1/2"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

RECTANGLE RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-R SERIES:
1/8" through 1/2"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

D RING TIE-DOWN, (3H)



304 STAINLESS STEEL

S3728-D SERIES:
1/4" through 1/2"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3728-UB SERIES 3 HOLE BACKING PLATE. AVOID SHOCK LOADS!

TRIANGLE RING TIE-DOWN, (3H)



304 STAINLESS STEEL

S3728-T SERIES:
1/4" through 1/2"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3728-UB SERIES 3 HOLE BACKING PLATE. AVOID SHOCK LOADS!

DOUBLE RECTANGLE RING TIE-DOWN, (4H)



304 STAINLESS STEEL

S3729-R SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. NEVER EXCEED WORKING LOAD LIMIT. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3729-UB SERIES BACKING PLATE. AVOID SHOCK LOADS!

S3727, S3728 & S3729 SERIES BACKING PLATE



304 STAINLESS STEEL

S3727-UB SERIES:
1/8" through 1/2"

S3728-UB SERIES:
1/8" through 1/2"

S3729-UB SERIES:
1/4" through 3/8"

STAMPED. USE WITH MATCHING S3727-SERIES (2H), S3728-SERIES (3H) OR S3729-SERIES (4H) TIE-DOWN RINGS. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING.

TRIANGLE RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-T SERIES:
1/8" through 1/2"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

RECTANGLE RING TIE-DOWN, (3H)



304 STAINLESS STEEL

S3728-R SERIES:
1/4" through 1/2"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3728-UB SERIES 3 HOLE BACKING PLATE. AVOID SHOCK LOADS!

DOUBLE D RING TIE-DOWN, (4H)



304 STAINLESS STEEL

S3729-D SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. NEVER EXCEED WORKING LOAD LIMIT. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3729-UB SERIES BACKING PLATE. AVOID SHOCK LOADS!

DOUBLE TRIANGLE RING TIE-DOWN, (4H)



304 STAINLESS STEEL

S3729-T SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. NEVER EXCEED WORKING LOAD LIMIT. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3729-UB SERIES BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT D RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-D02 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

SURFACE MOUNT RECTANGLE RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-R02 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

SURFACE MOUNT D RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-D02 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT TRIANGLE RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-T02 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT RECTANGLE RING TIE-DOWN, (3H)



304 STAINLESS STEEL

S3728-R02 SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3728-UB SERIES 3 HOLE BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT DOUBLE D RING TIE-DOWN, (4H)



304 STAINLESS STEEL

S3729-D02 SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. STAMPED PAN. NEVER EXCEED WORKING LOAD LIMIT. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3729-UB SERIES BACKING PLATE & LOCK NUTS. AVOID SHOCK LOADS!

SURFACE MOUNT TRIANGLE RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-T02 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

SURFACE MOUNT RECTANGLE RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-R02 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT D RING TIE-DOWN, (3H)



304 STAINLESS STEEL

S3728-D02 SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3728-UB SERIES 3 HOLE BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT TRIANGLE RING TIE-DOWN, (3H)



304 STAINLESS STEEL

S3728-T02 SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3728-UB SERIES 3 HOLE BACKING PLATE. AVOID SHOCK LOADS!

SURFACE MOUNT RECTANGLE RING TIE-DOWN, (4H)



304 STAINLESS STEEL

S3729-R02 SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. STAMPED PAN. NEVER EXCEED WORKING LOAD LIMIT. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3729-UB SERIES BACKING PLATE & LOCK NUTS. AVOID SHOCK LOADS!

SURFACE MOUNT TRIANGLE RING TIE-DOWN, (4H)



304 STAINLESS STEEL

S3729-T02 SERIES:
1/4" through 3/8"

WELDED RING WITH STAMPED BASE. STAMPED PAN. NEVER EXCEED WORKING LOAD LIMIT. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3729-UB SERIES BACKING PLATE & LOCK NUTS. AVOID SHOCK LOADS!

RECESSED RECTANGLE RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-R03 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

RECESSED D RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-D03 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

RECESSED TRIANGLE RING TIE-DOWN, (2H)



304 STAINLESS STEEL

S3727-T03 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

ROUND PAD EYE



304 STAINLESS STEEL

S3707-0 SERIES:
1-5/16" through 2"

STAMPED AND WELDED CONSTRUCTION.

RECESSED D RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-D03 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BODY. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

RECESSED TRIANGLE RING TIE-DOWN, (1H)



304 STAINLESS STEEL

S3726-T03 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. AVOID SHOCK LOADS!

RECESSED RECTANGLE RING TIE-DOWN, (2H)




304 STAINLESS STEEL

S3727-R03 SERIES:
3/16" through 5/16"

WELDED RING WITH STAMPED BASE. LARGER SIZES SUPPLIED WITH ANTI-RATTLE PAD FOR SMOOTH OPERATION. MOUNT USING LOCK WASHER & NUT OR WASHER & LOCKNUT FOR MOUNTING. USE WITH S3727-UB SERIES 2 HOLE BACKING PLATE. AVOID SHOCK LOADS!

HEAVY DUTY SQUARE PAD EYE



316 STAINLESS STEEL

S3704-0000:
3"

HEAVY DUTY, ONE PIECE PRECISION CASTING, WITHOUT WELDS. FOR MAXIMUM LOAD DISTRIBUTION USE HD BACKPLATE (S3704-0001).

HEAVY DUTY DIAMOND PAD EYE



316 STAINLESS STEEL

S3702-0 & S3703-0000:
3-1/4" & 4"

HEAVY DUTY, ONE PIECE PRECISION CASTING, WITHOUT WELDS. FOR MAXIMUM LOAD DISTRIBUTION USE HD BACKPLATE S3702-BP00 OR S3703-0001.

STAMPED DIAMOND PAD EYE



304 STAINLESS STEEL

S3703-1002:
3-1/4"

STAMPED AND WELDED CONSTRUCTION. USE BACKING PLATE S3703-BP12.

OBLONG PAD EYE



304 STAINLESS STEEL

S3705-0 SERIES:
2-1/8" through 4"

STAMPED AND WELDED CONSTRUCTION.
USE BACKING PLATE S3706-0 SERIES.

PAD EYE



304 STAINLESS STEEL

S3719-0 SERIES:
5/32" through 5/16"

ROUND CROSS-SECTION PREVENTS CHAFE OF ROPE.

2 HOLE EYE STRAP



304 STAINLESS STEEL

S3708-0 SERIES:
3/8" through 5/8"

SIZE IS THE MAXIMUM INSIDE DIAMETER.

FLAT HOOK



316 STAINLESS STEEL

S3715-0000:
5/16"

ROUNDED SADDLE PREVENTS CHAFE OF ROPE ON EDGES.

HEAVY DUTY OBLONG PAD EYE



316 STAINLESS STEEL

S3705-X SERIES:
3" through 4"

HEAVY DUTY ONE PIECE PRECISION CASTING WITHOUT WELDS.
USE BACKING PLATE S3705-BPX SERIES.

HEAVY DUTY PAD EYE



316 STAINLESS STEEL

S3719-1005:
5/8"

ITEM IS CAST. ROUND BAR PREVENTS CHAFE OF ROPE.

PAD EYE



304 STAINLESS STEEL

S3710-0 SERIES:
3/8" through 1-1/8"

SIZE IS THE MAXIMUM INSIDE DIAMETER.

4 HOLE EYE STRAP



304 STAINLESS STEEL

S3709-0 SERIES:
3/8" through 5/8"

SIZE IS THE MAXIMUM INSIDE DIAMETER.
ROUNDED SADDLE PREVENTS CHAFE OF ROPE ON EDGES.

ANCHOR EYE



316 STAINLESS STEEL

S3701-0001:
#1

WORKS WITH MOST WEBBING CLIPS, SUCH AS S0221-SERIES, S0220-0025, S0211-0025 AND "S" HOOKS.

ANCHOR SWIVEL EYE



316 STAINLESS STEEL

S3701-0002:
1/4" Hole Diameter

THIS PART IS DESIGNED TO SWIVEL 360 DEGREES AND ALLOW 180 DEGREE ALIGNMENT OF ATTACHMENT. WORKS WITH MOST WEBBING CLIPS SUCH AS S0221-SERIES, S0220-0025, S0211-0025AND "S" HOOKS. USE BACKING PLATE S3701-BP02.

FOLDING PAD EYE



316 STAINLESS STEEL

S3711-0003:
1/8"

SWIVEL PAD EYE



304 STAINLESS STEEL

S3714-0 SERIES:
3/16" through 5/16"

RING ROTATES 360 DEGREES. MOUNTING HOLES ARE 5/32" EXCEPT FOR S3714-0008, WHICH HAS 3/16" MOUNTING HOLES. SCREWS NOT INCLUDED.

LASHING RING – WELD ON



316 STAINLESS STEEL

S3722-0 SERIES:
1/2" through 1"

FORGED

HEAVY DUTY LASHING RING IS DESIGNED FOR DEMANDING TIE-DOWN APPLICATIONS. "D" RING IS FORGED 316 STAINLESS STEEL AND FOLDS FLUSH WHEN NOT IN USE. FEATURES WELD-ON MOUNTING PLATE.

LASHING RING, BENT – WELD ON



316 STAINLESS STEEL

S3722-BN SERIES:
1/2" through 1"

FORGED

BENT "D" RINGS ENABLE USER TO ATTACH LASHING FITTINGS TO RING WITHOUT HAVING TO LIFT RING FIRST.

FOLDING PAD EYE



316 STAINLESS STEEL

S3711-0 SERIES:
1/4" through 5/16"

HEAVY DUTY FOLDING PAD EYE



316 STAINLESS STEEL

S3712-0 SERIES:
1/4" through 3/8"

FORGED

"D" RING IS FORGED 316 STAINLESS AND HOLDING PAD BODY IS PRECISION CAST 316.

SWIVEL PAD EYE WITH RING



304 STAINLESS STEEL

S3714-R SERIES:
3/16" through 5/16"

RING WITH LARGER RING ROTATES 360 DEGREES. MOUNTING HOLES ARE 5/32" EXCEPT FOR S3714-R008, WHICH HAS 3/16" MOUNTING HOLES. SCREWS NOT INCLUDED.

LASHING RING – BOLT ON



316 STAINLESS STEEL

S3723-0 SERIES:
1/2" through 1"

FORGED

HEAVY DUTY LASHING RING IS DESIGNED FOR DEMANDING TIE-DOWN APPLICATIONS. "D" RING IS FORGED 316 STAINLESS STEEL AND FOLDS FLUSH WHEN NOT IN USE. FEATURES BOLT-ON MOUNTING PLATE.

LASHING RING, BENT – BOLT ON



316 STAINLESS STEEL

S3723-BN SERIES:
1/2" through 1"

FORGED

BENT "D" RINGS ENABLE USER TO ATTACH LASHING FITTINGS TO RING WITHOUT HAVING TO LIFT RING FIRST.

UNIVERSAL BACKING PLATE



316 STAINLESS STEEL

S3712-0005:
2.5″

HD UNIVERSAL BACKING PLATE IS DESIGNED FOR USE WITH ANY OF THE THREE FOLDING PAD EYES.

HOIST ANCHOR BASE



316 STAINLESS STEEL

S0116-HB SERIES:
1/4″ through 1″

DESIGNED FOR USE WITH STANDARD SHACKLE TYPES AND SIZES. THREADS ARE UNC.

ANCHOR BASE WITH STUD



316 STAINLESS STEEL

S0116-HC SERIES:
1/4″ through 1″

DESIGNED FOR USE WITH STANDARD SHACKLE TYPES AND SIZES. INCLUDES HOIST ANCHOR BASE, THREADED ROD, WASHER & NUT. THREADS ARE UNC.

ANCHOR BASE WITH SHACKLE



316 STAINLESS STEEL

S0116-HD SERIES:
1/4″ through 1″

FORGED

INCLUDES HOIST ANCHOR BASE AND FIXED SHACKLE. THREADS ARE UNC.

COMPLETE HOIST ASSEMBLY



316 STAINLESS STEEL

S0116-HF SERIES:
1/4″ through 1″

FORGED

INCLUDES HOIST ANCHOR BASE, FIXED SHACKLE, THREADED ROD, WASHER AND NUT. THREADS ARE UNC.

HEAVY DUTY TOW PAD EYE




316 STAINLESS STEEL

S3718-0000:
3-1/2″

HEAVY DUTY PAD EYE PROVIDES A THRU HULL BOW ATTACHMENT FOR SMALL CRAFT TOWING. BACKING PLATE SOLD WITH TOW PAD EYE FOR MAXIMUM LOAD DISTRIBUTION.

BACKING PLATE



304 STAINLESS STEEL

S3716-0 SERIES:
4″x6″ through 8″x12″

USED FOR BACKING OF CLEATS, CHOCKS, ETC. UNDRILLED, CAN BE CUSTOMIZED AT ADDITIONAL CHARGE.

TIE DOWN TAB



304 STAINLESS STEEL

S3725-0060:
1-5/16″

TIE DOWN TAB HAS A SINGLE MOUNTING HOLE. MOUNTING FASTENER IS NOT INCLUDED.

TIE DOWN TAB WITH RING



304 STAINLESS STEEL

S3725-R050:
1-5/16″

TIE DOWN TAB HAS A SINGLE MOUNTING HOLE. MOUNTING FASTENER IS NOT INCLUDED.

SNAP COAT HOOK



316 STAINLESS STEEL

S3840-0003:
1.44″ Length

USE 2 #6 FASTENERS. FEATURES RECESSED CHANNEL FOR A COMPLETE OPENING OF LATCH. CLIP CAN ALSO BE USED WITH OTHER TIE-DOWN COMPONENTS.

SUNCOR STAINLESS, INC.

SWIVEL HOIST RINGS

STAINLESS STEEL SWIVEL HOIST RINGS

Suncor Stainless' New Swivel Hoist Ring Series is built for safe, reliable lifting in demanding environments, featuring a patented design with 360° rotation and 180° pivot for self-alignment and reduced side-loading. Made from forged 316 stainless steel with precision CNC-machined components, it offers exceptional strength, corrosion resistance, and durability.

INTRODUCING

Suncor's New Swivel Hoist Rings

Engineered for Unmatched Safety, Versatility & Durability

Featuring **360° rotation** and **180° ring pivot**, these patented rings self-align under load, eliminating stress and distortion, while maintaining **100% rated capacity at any angle**.

Crafted entirely from 316 stainless steel, they deliver **superior corrosion resistance and performance** in harsh environments—from manufacturing and construction to aerospace and maritime industries.

Precision CNC-machined, **torque-marked**, and **tested to meet ASME** and **military standards**.





Visit www.suncorstainless.com to learn more about our new swivel hoist ring series!

SWIVEL HOIST RING – LONG WITH LONG SCREW



316 STAINLESS STEEL

S0325-LL SERIES:
1/2" through 7/8"

FORGED RING WITH MACHINED BASE. SUPPLIED WITH ASTM F593 SCREWS (UNC). DESIGNED FOR 5:1 SAFETY FACTOR. MEETS ASME.B30.26. REPLACEMENT PARTS AVAILABLE.

SWIVEL HOIST RING – LONG WITH SHORT SCREW



316 STAINLESS STEEL

S0325-LS SERIES:
1/2" through 7/8"

FORGED RING WITH MACHINED BASE. SUPPLIED WITH ASTM F593 SCREWS (UNC). DESIGNED FOR 5:1 SAFETY FACTOR. MEETS ASME.B30.26. REPLACEMENT PARTS AVAILABLE.

SWIVEL HOIST RING – STANDARD WITH LONG SCREW



316 STAINLESS STEEL

S0325-SL SERIES:
5/16" through 7/8"

FORGED RING WITH MACHINED BASE. SUPPLIED WITH ASTM F593 SCREWS (UNC). DESIGNED FOR 5:1 SAFETY FACTOR. MEETS ASME.B30.26. REPLACEMENT PARTS AVAILABLE.

SWIVEL HOIST RING – STANDARD WITH SHORT SCREW



316 STAINLESS STEEL

S0325-SS SERIES:
5/16" through 7/8"

FORGED RING WITH MACHINED BASE. SUPPLIED WITH ASTM F593 SCREWS (UNC). DESIGNED FOR 5:1 SAFETY FACTOR. MEETS ASME.B30.26. REPLACEMENT PARTS AVAILABLE.

SWIVELS

STAINLESS STEEL SWIVELS

Suncor's stainless steel swivels are offered in standard and heavy duty combinations. The swivels are made from stainless steel for corrosion resistance and durability with many of the available style being load rated. They are available in sizes ranging from 5/32" to 1". Suncor's swivels are ideal for marine and industrial rigging applications.

FED. SPEC. EYE AND EYE SWIVEL



316 STAINLESS STEEL

S0128-FS SERIES:
1/4" through 5/8"

FORGED

I/A/W FED. SPECIFICATION RR-C-271F TYPE VII, CLASS 2 (EXCEPT 316 STAINLESS STEEL). MEETS REQUIREMENTS OF: MIL-DTL-32655 (EXCLUDING S0128-FS08).

HEAVY DUTY EYE AND EYE SWIVEL



316 STAINLESS STEEL

S0128-HD SERIES:
1/4" through 1/2"

MARKED WITH SIZE AND WORKING LOAD.

NITRONIC EYE AND EYE SWIVEL



NITRONIC 50

S0128-NM10:
3/8"

FORGED

I/A/W MIL-F-17280 TYPE III, STYLE A.

HEAVY DUTY EYE AND JAW SWIVEL



316 STAINLESS STEEL

S0155-HD SERIES:
1/4" through 1/2"

MARKED WITH SIZE AND WORKING LOAD.

FED. SPEC. CHAIN SWIVEL



316 STAINLESS STEEL

S0128-FX SERIES:
3/16" through 5/8"

FORGED

I/A/W FED. SPECIFICATION RR-C-271F TYPE VII, CLASS 1 (EXCEPT 316 STAINLESS STEEL). MEETS REQUIREMENTS OF: MIL-DTL-32655 (EXCLUDING S0128-FX05).

EYE AND EYE SWIVEL



316 STAINLESS STEEL

S0128-0 SERIES:
5/32" through 1"

SWIVELS ARE POSITIONING DEVICES AND ARE NOT INTENDED TO ROTATE UNDER LOAD.

FED. SPEC. JAW AND EYE SWIVEL



316 STAINLESS STEEL

S0155-FS SERIES:
1/4" through 5/8"

FORGED

I/A/W FED. SPECIFICATION RR-C-271F TYPE VII, CLASS 3C (EXCEPT 316 STAINLESS STEEL). MEETS REQUIREMENTS OF: MIL-DTL-32655.

EYE AND JAW SWIVEL



316 STAINLESS STEEL

S0155-0 SERIES:
1/4" through 3/4"

SUNCOR RECOMMENDS THE USE OF THREAD LOCKING FLUID WITH THIS TYPE OF SWIVEL.

HEAVY DUTY EYE AND JAW SWIVEL WITH NO SNAG PIN



316 STAINLESS STEEL

S0155-HD08NS:
5/16″

PIN SITS FLUSH WITH BODY OF SWIVEL. FEATURES HEX DRIVE HEAD. MARKED WITH SIZE AND WORKING LOAD.

JAW AND JAW SWIVEL



316 STAINLESS STEEL

S0156-FS SERIES:
3/16″ through 5/8″

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655 (EXCLUDING S0156-FS13). MARKED WITH SIZE AND WORKING LOAD LIMIT.

JAW AND JAW SWIVEL



316 STAINLESS STEEL

S0156-0 SERIES:
1/4″ through 3/4″

COMMERCIAL TYPE. SWIVELS ARE POSITIONING DEVICES AND ARE NOT INTENDED TO ROTATE UNDER LOAD.

JAW AND JAW SWIVEL WITH NO SNAG PINS



316 STAINLESS STEEL

S0156-NS SERIES:
1/4″ through 3/8″

NO SNAG PINS SIT FLUSH WITH BODY OF SWIVEL. FEATURES HEAD DRIVE HEAD.

360 DEGREE ANCHOR SWIVEL



17-4 PH STAINLESS STEEL

S0190-0 SERIES:
1/4″ - 5/16″ through 3/8″ - 1/2″

HEAVY DUTY ANCHOR RODE SWIVEL. SLEEK DESIGN WITH SOLID SCREW PINS. SWIVEL SPINS 360 DEGREES. EQUIPPED WITH SOLID BRONZE THRUST WASHER. USE S0190-RP SERIES REPLACEMENT PINS.

EYE AND JAW SWIVEL WITH NO SNAG PIN



316 STAINLESS STEEL

S0155-NS SERIES:
1/4″ through 3/8″

NO SNAG SHACKLE PIN SITS FLUSH WITH BODY OF SWIVEL. SUNCOR RECOMMENDS USING THREAD LOCKING FLUID WITH THIS TYPE OF SWIVEL.

HEAVY DUTY JAW AND JAW SWIVEL



316 STAINLESS STEEL

S0156-HD SERIES:
1/4″ through 1/2″

MARKED WITH SIZE AND WORKING LOAD.

HEAVY DUTY JAW AND JAW SWIVEL WITH NO SNAG PINS



316 STAINLESS STEEL

S0156-HD10NS:
3/8″

PINS SIT FLUSH WITH BODY OF SWIVEL. FEATURES HEX DRIVE HEAD. MARKED WITH SIZE AND WORKING LOAD.

UNIVERSAL ANCHOR SWIVEL



17-4 PH STAINLESS STEEL

S0190-X SERIES:
1/4″ - 5/16″ through 3/8″ - 1/2″

HEAVY DUTY ANCHOR RODE SWIVEL. SLEEK DESIGN WITH SOLID SCREW PINS. SWIVEL SPINS 360 DEGREES. EQUIPPED WITH SOLID BRONZE THRUST WASHER. USE S0190-RP SERIES REPLACEMENT PINS.

FREQUENTLY PURCHASED WITH:


PG. 5

ANCHOR SHACKLE
S0116-FS SERIES


PG. 37

HEAVY DUTY THIMBLE
S0127-0 SERIES

BLOCKS & SHEAVES

STAINLESS STEEL BLOCKS & SHEAVES

PULLPRO® premium blocks and sheaves are versatile, robust, long lasting, and manufactured from marine grade 316 stainless steel. They are designed for today's demanding lifting applications and allow you to manage your marine and industrial lifting projects with confidence. For general-purpose applications our standard blocks and sheaves provide rugged dependability and proven performance.

INTRODUCING

PULLPRO®

PREMIUM STAINLESS STEEL BLOCKS & SHEAVES



PULLPRO™ premium stainless steel blocks are engineered to meet ASME B30.26 standards for demanding industrial environments. Built from high-grade raw materials, our blocks and sheaves deliver exceptional strength, durability, and versatility—giving you the confidence to handle today's toughest lifting applications.

PULLPRO® SA BOW SHACKLE BLOCK – ROPE



316 STAINLESS STEEL

BRONZE BUSHING S0429-BA1 SERIES:
7/16" through 1"

STAINLESS BEARING S0430-BA1 SERIES:
7/16" through 1"

MEETS B30.26 SPECIFICATIONS.

PULLPRO® BOLT HEAD BLOCK – ROPE



316 STAINLESS STEEL

BRONZE BUSHING S0429-BH1 SERIES:
7/16" through 1"

STAINLESS BEARING S0430-BH1 SERIES:
7/16" through 1"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® D SHACKLE BLOCK – ROPE



316 STAINLESS STEEL

BRONZE BUSHING S0429-DS1 SERIES:
7/16" through 1"

STAINLESS BEARING S0430-DS1 SERIES:
7/16" through 1"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SWIVEL EYE BLOCK – ROPE



316 STAINLESS STEEL

BRONZE BUSHING S0429-EY1 SERIES:
7/16" through 1"

STAINLESS BEARING S0430-EY1 SERIES:
7/16" through 1"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SWIVEL HOOK BLOCK – ROPE



316 STAINLESS STEEL

BRONZE BUSHING S0429-HK1 SERIES:
7/16" through 3/4""

STAINLESS BEARING S0430-HK1 SERIES:
7/16" through 3/4"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SA BOW SHACKLE BLOCK LOLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0431-BA1 SERIES:
3/16" through 3/8"

STAINLESS BEARING S0432-BA1 SERIES:
3/16" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® BOLT HEAD BLOCK LOLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0431-BH1 SERIES:
3/16" through 3/8"

STAINLESS BEARING S0432-BH1 SERIES:
3/16" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® D SHACKLE BLOCK LOLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0431-DS1 SERIES:
3/16" through 3/8"

STAINLESS BEARING S0432-DS1 SERIES:
3/16" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SWIVEL EYE BLOCK LOLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0431-EY1 SERIES:
3/16" through 3/8"

STAINLESS BEARING S0432-EY1 SERIES:
3/16" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SWIVEL HOOK BLOCK LOLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0431-HK1 SERIES:
3/16" through 3/8"

STAINLESS BEARING S0432-HK1 SERIES:
3/16" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SA BOW SHACKLE BLOCK HILOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0433-BA1 SERIES:
1/8" through 3/8"

STAINLESS BEARING S0434-BA1 SERIES:
1/8" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® BOLT HEAD BLOCK HILOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0433-BH1 SERIES:
1/8" through 3/8"

STAINLESS BEARING S0434-BH1 SERIES:
1/8" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® D SHACKLE BLOCK HiLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0433-DS1 SERIES:
1/8" through 3/8"

STAINLESS BEARING S0434-DS1 SERIES:
1/8" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® SWIVEL HOOK BLOCK HiLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0433-HK1 SERIES:
1/8" through 3/8"

STAINLESS BEARING S0434-HK1 SERIES:
1/8" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® ROPE SHEAVE – BEARING



316 STAINLESS STEEL

S0415-1 SERIES:
3/8"-7/16" through 1"

PULLIPRO® LoLOAD WIRE ROPE SHEAVE – BEARING



316 STAINLESS STEEL

S0417-0 SERIES:
3/16" through 3/8"

PULLIPRO® HiLOAD WIRE ROPE SHEAVE – BEARING



316 STAINLESS STEEL

S0419-0 SERIES:
1/8" through 3/8"

PULLIPRO® SWIVEL EYE BLOCK HiLOAD – WIRE



316 STAINLESS STEEL

BRONZE BUSHING S0433-EY1 SERIES:
1/8" through 3/8"

STAINLESS BEARING S0434-EY1 SERIES:
1/8" through 3/8"

MEETS B30.26 SPECIFICATIONS.

PULLIPRO® ROPE SHEAVE – BUSHING



316 STAINLESS STEEL & BRONZE

S0414-1 SERIES:
3/8"-7/16" through 1"

SOME SIZES INCLUDE SPACER.

PULLIPRO® LoLOAD WIRE ROPE SHEAVE – BUSHING




316 STAINLESS STEEL & BRONZE

S0416-0 SERIES:
3/16" through 3/8"

SOME SIZES INCLUDE SPACER.

PULLIPRO® HiLOAD WIRE ROPE SHEAVE – BUSHING




316 STAINLESS STEEL & BRONZE

S0418-0 SERIES:
1/8" through 3/8"

SOME SIZES INCLUDE SPACER.

PULLIPRO® SHEAVE SPACER



304 STAINLESS STEEL

S0429-0 SERIES:
1/4" through 1"

SURFACE MOUNT BLOCK



304/316 STAINLESS STEEL

ROPE S0420-0-R SERIES:
2" through 4"

WIRE S0420-0-W SERIES:
2" through 4"

SHEAVE IS PRECISION CAST AND FITTED WITH BRONZE BUSH.
REMOVABLE SHEAVE (ROPE S0410 SERIES & WIRE S0412 SERIES).

SURFACE MOUNT BLOCK



304/316 STAINLESS STEEL

ROPE S0422-0-R SERIES:
2" through 4"

WIRE S0422-0-W SERIES:
2" through 4"

SHEAVE IS PRECISION CAST AND FITTED WITH BRONZE BUSH.
REMOVABLE SHEAVE (ROPE S0410 SERIES & WIRE S0412 SERIES).

SWIVEL BLOCK



304 STAINLESS STEEL

S0401-0 SERIES:
5/8" through 1-3/8"

SWIVEL BLOCK



304/316 STAINLESS STEEL

S0403-0 SERIES:
5/8" through 2"

SWIVEL BLOCK W/WIRE ROPE SHEAVE S0403-0050-W:
2"

SUPPLIED WITH REMOVABLE 316 STAINLESS SHEAVE.

SQUARE SWIVEL EYE BLOCK



304/316 STAINLESS STEEL

ROPE S0426-0 & ROPE S0426-0-R SERIES:
2" through 4"

WIRE S0426-0-W SERIES:
2" through 4"

SUPPLIED WITH REMOVABLE 316 OR 304 STAINLESS SHEAVE.
EYE IS NOT REMOVABLE.

SURFACE MOUNT BLOCK



304/316 STAINLESS STEEL

ROPE S0421-0-R SERIES:
2" through 4"

WIRE S0421-0-W SERIES:
2" through 4"

SHEAVE IS PRECISION CAST AND FITTED WITH BRONZE BUSH.
REMOVABLE SHEAVE (ROPE S0410 SERIES & WIRE S0412 SERIES).

PULLEY BLOCK WITH BRACKET



304 STAINLESS STEEL

W/BRACKET S0405-BR25:
1"

W/REMOVABLE PIN S0405-RP25:
1"

W/FIXED PIN S0405-FP25:
1"

PLASTIC SHEAVE WITH STAINLESS BODY, UP TO 1/4" ROPE.

SWIVEL BLOCK WITH HOOK



304 STAINLESS STEEL

S0401-H050:
1-3/8"

TWIN SWIVEL BLOCK



304 STAINLESS STEEL

FIXED SHEAVES S0402-0 SERIES:
5/8" through 7/8"

REMOVABLE SHEAVES S0402-0050:
1-3/8"

SUPPLIED WITH 304 STAINLESS SHEAVES.

TWIN SWIVEL BLOCK



304/316 STAINLESS STEEL

S0404-0 SERIES:
1" through 2"

SWIVEL BLOCK W/WIRE ROPE SHEAVES S0404-0050-W:
2"

SUPPLIED WITH REMOVABLE 316 STAINLESS SHEAVES.

SWIVEL EYE BLOCK



304/316 STAINLESS STEEL

ROPE S0423-E & S0423-E-R SERIES:
3" through 5"

WIRE S0423-E-W SERIES:
3" through 5"

SUPPLIED WITH REMOVABLE 316 OR 304 STAINLESS SHEAVE.
EYE IS NOT REMOVABLE.

TWIN SWIVEL EYE BLOCK



304/316 STAINLESS STEEL

ROPE S0424-E & S0424-E-R SERIES:
3" through 5"

WIRE S0424-E-W SERIES:
3" through 5"

SUPPLIED WITH 2 REMOVABLE 316 OR 304 STAINLESS SHEAVES.
EYE IS NOT REMOVABLE.

SEINE BLOCK WITH EYE



316 STAINLESS STEEL

ROPE S0427-0 & S0427-0-R SERIES:
3" through 4"

WIRE S0427-0-W SERIES:
3" through 4"

SUPPLIED WITH REMOVABLE 316 OR 304 STAINLESS SHEAVE.
EYE IS NOT REMOVABLE.

SEINE BLOCK WITH HOOK



316 STAINLESS STEEL

ROPE S0427-H & S0427-H-R SERIES:
3" through 4"

WIRE S0427-H-W SERIES:
3" through 4"

SUPPLIED WITH REMOVABLE 316 OR 304 STAINLESS SHEAVE.
HOOK IS NOT REMOVABLE.

SNATCH BLOCK



316 STAINLESS STEEL

ROPE S0428-0-R SERIES:
3" through 6"

WIRE S0428-0-W SERIES:
3" through 6"

ROPE SHEAVE – BUSHING



316 STAINLESS STEEL

S0410-0 SERIES:
1/4" through 1"

FOR FIBROUS ROPE; FITTED WITH BRONZE BUSH,
BORE CAN BE CUSTOMIZED.

ROPE SHEAVE – BUSHING



304 STAINLESS STEEL

S0400-0 SERIES:
1/4" through 3/8"

FOR FIBROUS ROPE; FITTED WITH BRONZE BUSH,
BORE CAN BE CUSTOMIZED.

WIRE ROPE SHEAVE – BUSHING



316 STAINLESS STEEL

S0412-0 SERIES:
3/32"+1/8" through 3/8"

FOR WIRE ROPE; FITTED WITH BRONZE BUSH,
BORE CAN BE CUSTOMIZED.

ROPE SHEAVE – BEARINGS



316 STAINLESS STEEL

S0411-0 SERIES:
1/4" through 5/8"

FOR FIBROUS ROPE; FITTED WITH TWO HIGH QUALITY,
SHIELDED, STAINLESS STEEL BEARINGS.

WIRE ROPE SHEAVE – BEARINGS



316 STAINLESS STEEL

S0413-0 SERIES:
3/32"+1/8" through 3/8"

FOR WIRE ROPE; FITTED WITH TWO HIGH QUALITY, SHIELDED,
STAINLESS STEEL BEARINGS.

THIMBLES, WIRE ROPE CLIPS & WIRE ROPE

STAINLESS STEEL THIMBLES, WIRE ROPE CLIPS & WIRE ROPE

When it comes to securing and reinforcing heavy-duty lifting, rigging, and structural applications, the quality of the hardware used plays a crucial role in safety and durability. Stainless steel thimbles, wire rope clips, and wire ropes are three essential components that are commonly used across various industries, including construction, maritime, industrial, and infrastructure projects.

STANDARD THIMBLE



316 STAINLESS STEEL

S0124-0 SERIES:
1/8" through 5/8"

COMMERCIAL THIMBLE



304 STAINLESS STEEL

S0123-0 SERIES:
1/16" through 1"

MIL. SPEC THIMBLE



316 STAINLESS STEEL

S0124-AN SERIES:
3/32" through 1/2"

MEETS MIL SPEC AN100 (AIR FORCE/NAVY).

FED. SPEC THIMBLE



316 STAINLESS STEEL

S0123-FS SERIES:
3/16" through 1-1/4"

HEAVY DUTY VERSION. DIMENSIONS AND WORKING LOAD ARE TO FEDERAL SPECIFICATION: FF-T-276B, TYPE III.

FED. SPEC THIMBLE



304 STAINLESS STEEL

S0125-FS SERIES:
3/16" through 1"

HEAVY DUTY VERSION. DIMENSIONS AND WORKING LOAD ARE TO FEDERAL SPECIFICATION: FF-T-276B, TYPE III. SIZES 7/8", 1", 1-1/8" AND 1-1/4" ARE AVAILABLE IN 316 STAINLESS.

HEAVY DUTY THIMBLE



316 STAINLESS STEEL

S0127-0 SERIES:
3/16" through 1-1/8"-1-1/4"

HEAVY DUTY VERSION.

EXTRA HEAVY DUTY THIMBLE



304 STAINLESS STEEL

S0123-XH SERIES:
1/4" through 1"

PRECISION CAST EXTRA HEAVY DUTY THIMBLE, NOT FORMED FROM FLAT STEEL. EXCEPTIONAL RESISTANCE TO WEAR AND CRUSHING.

CAPTIVE THIMBLE



316 STAINLESS STEEL

S0126-0 SERIES:
1/2" through 1-1/4"

ITS PRIMARY FUNCTION IS TO HOLD WIRE OR FIBROUS ROPE "CAPTIVE" WHILE PREVENTING CHAFFING, MAKING IT IDEAL FOR IN-WATER BOAT TOWING APPLICATIONS.

WIRE ROPE CLIP



316 STAINLESS STEEL

S0122-SS SERIES:
1/16" through 1"

WIRE ROPE CLIP



304 STAINLESS STEEL

S0122-FS SERIES:
1/16" through 1-1/4"

HEAVY DUTY WIRE ROPE CLIP



316 STAINLESS STEEL

S0122-0 SERIES:
1/8" through 1"

FORGED

I/A/W FEDERAL SPECIFICATION FF-C-450D, TYPE 1 (EXCEPT 316 STAINLESS, DROP FORGED).

CHAIR CLIP



316 STAINLESS STEEL

S0122-C SERIES:
1/4" through 3/4"

I/A/W FEDERAL SPECIFICATION FF-C-450D, TYPE 3, CLASS 1 (EXCEPT 316 STAINLESS AND CAST).

WIRE ROPE 1 X 19



BULK SIZES AVAILABLE

316/304 STAINLESS STEEL

316 STAINLESS STEEL S0701-0 SERIES:
1/16" through 1/2"

304 STAINLESS STEEL S0702-0 SERIES:
1/8" through 3/8"



CAN BE CUT TO YOUR REQUEST (IN FEET). ALL 1X19 WIRE IS LEFT HAND LAY.

WIRE ROPE 7 X 19



BULK SIZES AVAILABLE

316/304 STAINLESS STEEL

316 STAINLESS STEEL S0703-0 SERIES:
3/32" through 1/2"

304 STAINLESS STEEL S0704-0 SERIES:
3/32" through 3/8"



CAN BE CUT TO YOUR REQUEST (IN FEET).

WIRE ROPE 7 X 7



BULK SIZES AVAILABLE

316 STAINLESS STEEL

S0705-0 SERIES:
1/16" through 1/4"



CAN BE CUT TO YOUR REQUEST (IN FEET).

PVC COATED WIRE ROPE 7 X 7



BULK SIZES AVAILABLE

316 STAINLESS STEEL

WHITE PVC COATED S0708-0 SERIES:
1/16" through 1/4"

BLACK PVC COATED S0709-0 SERIES:
1/16" through 1/4"



WIRE IS RIGHT HAND LAY IWRC PVC COATED. OIL FREE & POLISHED.

PRODUCTS FREQUENTLY PURCHASED WITH THIMBLES, WIRE ROPE CLIPS & WIRE ROPE:



ANCHOR SHACKLE W/ OVERSIZE SCREW PIN
S0116-FS SERIES



FORGED JAW & JAW TURNBUCKLE
S0108-JJ SERIES



WELDED EYE BOLT
S0312-0 SERIES



STAINLESS STEEL SWAGE SLEEVE
S0750-0 SERIES

SUNCOR STAINLESS, INC.

SWAGE HARDWARE

STAINLESS STEEL SWAGE HARDWARE

When it comes to creating secure, durable, and long-lasting connections in wire rope systems, the quality and precision of the swaging hardware used is essential. Stainless steel swage hardware, including swage sleeves, swage terminals, mil-spec swage terminals, and hand swage tools, provides a reliable, high-strength solution for a wide range of applications.

MIL. SPEC SWAGE TERMINALS

Suncor Stainless is approved for the manufacturing of swage fittings per MIL-DTL-781, and to make cable assemblies under MIL-DTL-6117 from the Defense Logistics Agency (DLA) for the U.S. Government. These qualifications have been sought to expand our current offerings to the highest quality rated products. Suncor is also on the QPL-781 (Qualified Product List) AND QML-6117 (Qualified Manufacturer List). In addition to meeting these Mil. Spec requirements, we have risen Suncor's already high standard of quality.

These qualified stainless steel swage components that are listed in QPL-781 are right hand thread Swage Studs (MS21259-RH), Swage Eyes (MS20668), Special Eye (RA-3266-6), Swage Forks (MS20667) and Single Shank Balls (MS20664C), with sizes ranging from 1/16" to 1/2".

Mil. Spec Products are Proudly Manufactured at our Plymouth, MA Facility.

MIL. SPEC SPECIAL EYE



STAINLESS STEEL

RA-3266-6:
3/16"

MADE IN USA

THIS FITTING HAS MET ALL QUALITY AND TESTING REQUIREMENTS PER MIL-DTL-781 AND ARE APPROVED FOR LISTING IN QPL-781. MACHINE SWAGE ONLY.

MIL. SPEC SWAGE STUD, UNF THREAD



STAINLESS STEEL

RIGHT HAND MS21259-RH SERIES:
1/16" through 3/8"

LEFT HAND MS21259-LH SERIES:
1/16" through 3/8"

MADE IN USA

THESE FITTINGS MEET MIL SPEC #MS21259. THE RIGHT HAND VERSION MEETS THE QUALITY AND TESTING REQUIREMENTS PER MIL-DTL-781 AND ARE APPROVED FOR LISTING IN QPL-781. ALL THREADS ARE "UNF". MACHINE SWAGE ONLY.

MIL. SPEC SWAGE FORK



STAINLESS STEEL

MS20667 SERIES:
1/16" through 1/2"

MADE IN USA

THESE FITTINGS MEET MIL SPEC #MS20667 AND HAVE MET ALL QUALITY AND TESTING REQUIREMENTS PER MIL-DTL-781 AND ARE APPROVED FOR LISTING IN QPL-781. MACHINE SWAGE ONLY.

MIL. SPEC SWAGE EYE



STAINLESS STEEL

MS20668 SERIES:
1/16" through 3/8"

MADE IN USA

THESE FITTINGS MEET MIL SPEC #MS20668 AND HAVE MET ALL QUALITY AND TESTING REQUIREMENTS PER MIL-DTL-781 AND ARE APPROVED FOR LISTING IN QPL-781. MACHINE SWAGE ONLY.

MIL. SPEC SINGLE SHANK BALL



STAINLESS STEEL

MS20664C SERIES:
1/16" through 5/16"

MADE IN USA

THESE FITTINGS MEET MIL SPEC #MS20664 AND HAVE MET ALL QUALITY AND TESTING REQUIREMENTS PER MIL-DTL-781 AND ARE APPROVED FOR LISTING IN QPL-781.

MIL. SPEC DOUBLE SHANK BALL



STAINLESS STEEL

MS20663C SERIES:
1/16" through 5/16"

MADE IN USA

THESE FITTINGS MEET MIL SPEC #MS20663 AND HAVE MET ALL QUALITY AND TESTING REQUIREMENTS PER MIL-DTL-781.

SWAGE EYE



316 STAINLESS STEEL

S0733-0 SERIES:
1/16" through 1/2"

MACHINE SWAGE ONLY. DESIGNED TO MATE WITH S0734-SERIES SWAGE JAWS.

SWAGE JAW



316 STAINLESS STEEL

S0734-0 SERIES:
1/16" through 1/2"

MACHINE SWAGE ONLY. DESIGNED TO MATE WITH S0733-SERIES SWAGE EYES.

SWAGE MARINE EYE



316 STAINLESS STEEL

S0735-0 SERIES:
1/16" through 1/2"

MACHINE SWAGE ONLY.

SWAGE MARINE JAW



316 STAINLESS STEEL

S0736-0 SERIES:
1/16" through 1/2"

MACHINE SWAGE ONLY.

SWAGE MARINE TOGGLE



316 STAINLESS STEEL

S0737-0 SERIES:
1/8" through 3/8"

MACHINE SWAGE ONLY.

SWAGE DOMEHEAD



316 STAINLESS STEEL

S0738-0 SERIES:
1/8" through 1/4"

MACHINE SWAGE REQUIRED.

SWAGE STEMBALL




316 STAINLESS STEEL

S0740-0 SERIES:
1/8" through 3/8"

FORGED

STEMBALL CUPS



316 STAINLESS STEEL

S0741-0 SERIES:
1/8" - 5/32" through 5/16" - 3/8"

SWAGE "T" TERMINAL



316 STAINLESS STEEL

S0742-0 SERIES:
3/32" through 3/8"

FORGED

"T" PLATE



316 STAINLESS STEEL

S0743-0 SERIES:
3/32" - 1/8" through 5/16" - 3/8"

DESIGNED FOR USE WITH THE S0742-SERIES "T" TERMINALS. SIZES INDICATED REFER TO THE SIZE OF THE COMPATIBLE "T" TERMINAL(S).

SWAGE STUD, UNF THREAD



316 STAINLESS STEEL

RIGHT HAND THREAD S0731-0 SERIES:
1/16" through 1/2"

LEFT HAND THREAD S0732-0 SERIES:
1/8" through 1/2"

S0731-SERIES AND S0732-SERIES ARE FOR MACHINE SWAGE ONLY.

MINI SWAGE STUD, UNC THREAD



316 STAINLESS STEEL

RIGHT HAND THREAD S0726-R704:
5/32"

LEFT HAND THREAD S0726-L704:
5/32"

DESIGNED FOR USE WITH 5/32" DIAMETER WIRE ROPE.

RAIL SWAGE STUD, UNC THREAD



316 STAINLESS STEEL

RIGHT HAND THREAD S0729-0 SERIES:
1/8" through 3/16"

LEFT HAND THREAD S0730-0 SERIES:
1/8" through 3/16"

MACHINE SWAGE ONLY. THIS SLEEK SWAGE STUD IS IDEAL FOR ARCHITECTURAL APPLICATIONS.

RAIL SWAGE STUD, UNF THREAD



316 STAINLESS STEEL

RIGHT HAND THREAD S0727-0 SERIES:
1/8" through 3/16"

LEFT HAND THREAD S0728-0 SERIES:
5/32" through 3/16"

MACHINE SWAGE ONLY. THIS SLEEK SWAGE STUD IS IDEAL FOR ARCHITECTURAL APPLICATIONS.

GATE TERMINALS



316 STAINLESS STEEL

GATE EYE S0744-0 SERIES:
1/8" through 1/4"

JOINED GATE EYES S0746-0 SERIES:
1/8" through 1/4"

PRECISION CAST, THEN WELDED. MACHINE SWAGE ONLY. HAND SWAGE VERSION OF THIS ITEM IS AVAILABLE .

SWIVEL GATE TERMINALS



316 STAINLESS STEEL

SWIVEL GATE EYE S0718-0 SERIES:
1/8" through 3/16"

JOINED SWIVEL GATE EYE S0719-0 SERIES:
1/8" through 3/16"

PRECISION CAST, THEN WELDED. MACHINE SWAGE ONLY. HAND SWAGE VERSION OF THIS ITEM IS AVAILABLE .

GATE EYE, HAND SWAGE



316 STAINLESS STEEL

S0744-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

JOINED GATE EYES, HAND SWAGE



316 STAINLESS STEEL

S0746-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

SWIVEL GATE EYE, HAND SWAGE



316 STAINLESS STEEL

S0718-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

JOINED SWIVEL GATE EYES, HAND SWAGE



316 STAINLESS STEEL

S0719-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

PELICAN HOOK WITH SWAGE STUD



316 STAINLESS STEEL

S0162-A SERIES:
1/8" through 1/4"

ALL THREADS ARE RIGHT HAND "UNF". S0731-SERIES SWAGE STUDS ARE USED FOR THIS ASSEMBLY. MACHINE SWAGE ONLY.

PELICAN HOOK WITH HAND SWAGE STUD



316 STAINLESS STEEL

S0162-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

WALL MOUNT TERMINAL, HAND SWAGE



316 STAINLESS STEEL

S0723-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

TOGGLE TERMINAL, HAND SWAGE



316 STAINLESS STEEL

S0737-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

LIFELINE ADJUSTER



316 STAINLESS STEEL

S0745-0 SERIES:
1/8" through 3/16"

TENSIONER DESIGNED FOR, BUT NOT LIMITED TO, LIFELINE APPLICATIONS. MACHINE SWAGE ONLY.

LIFELINE ADJUSTER WITH HAND SWAGE STUD



316 STAINLESS STEEL

S0745-H SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

STANDARD STUD, HAND SWAGE, UNF THREAD



316 STAINLESS STEEL

RIGHT HAND S0731-H SERIES:
1/8" through 3/16"

LEFT HAND S0731-LH SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

EXTRA LONG STUD, HAND SWAGE



316 STAINLESS STEEL

S0731-HL SERIES:
1/8" through 3/16"

DESIGNED FOR HAND SWAGE USE ONLY.

HAND SWAGER



FOR USE WITH HAND SWAGE STUD SERIES ONLY

E0113-H600:
24"

HAND SWAGER CRIMPS THE HAND SWAGE STUDS ONTO THE WIRE ROPE. SWAGES 1/8", 5/32" AND 3/16". AFTER SWAGE GAUGE INCLUDED.

BENCH SWAGER



FOR USE WITH HAND SWAGE STUD SERIES ONLY

E0115-H600:
23"

BENCH SWAGER CRIMPS THE HAND SWAGE STUDS ONTO THE WIRE ROPE. SWAGES 1/8", 5/32" AND 3/16". AFTER SWAGE GAUGE INCLUDED.

COPPER STOP SLEEVE



COPPER

K0754-0 SERIES:
1/16" - 1.5 mm through 3/8" - 9.0 mm

MADE IN USA

FOR 1/16" - 1/8", USE HAND SWAGER E0113-0350. FOR 1/16" - 3/16", USE HAND SWAGER E0113-0600. FOR 1/4" USE HAND SWAGER E0113-0700. USE A HYDRAULIC SWAGER ON LARGER SIZES.

ALUMINUM STOP SLEEVE



ALUMINUM

A0754-0 SERIES:
1/16" - 1.5 mm through 1/4" - 6.0 mm

MADE IN USA

FOR 1/16" - 1/8", USE HAND SWAGER E0113-0350. FOR 1/16" - 3/16", USE HAND SWAGER E0113-0600. FOR 1/4" USE HAND SWAGER E0113-0700. USE A HYDRAULIC SWAGER ON LARGER SIZES.

COPPER SWAGE SLEEVE



COPPER

K0752-0 SERIES:
1/16" - 1.5 mm through 1/2" - 12.0 mm

MADE IN USA

FOR 1/16" - 1/8", USE HAND SWAGER E0113-0350. FOR 1/16" - 3/16", USE HAND SWAGER E0113-0600. FOR 1/4" USE HAND SWAGER E0113-0700. USE A HYDRAULIC SWAGER ON LARGER SIZES.

ALUMINUM SWAGE SLEEVE



ALUMINUM

A0751-0 SERIES:
1/16" - 1.5 mm through 1/2" - 12.0 mm

MADE IN USA

FOR 1/16" - 1/8", USE HAND SWAGER E0113-0350. FOR 1/16" - 3/16", USE HAND SWAGER E0113-0600. FOR 1/4" USE HAND SWAGER E0113-0700. USE A HYDRAULIC SWAGER ON LARGER SIZES.

ZINC PLATED COPPER SWAGE SLEEVE



ZINC PLATED COPPER

Z0753-0 SERIES:
1/16" - 1.5 mm through 1/2" - 12.0 mm

MADE IN USA

FOR 1/16" - 1/8", USE HAND SWAGER E0113-0350. FOR 1/16" - 3/16", USE HAND SWAGER E0113-0600. FOR 1/4" USE HAND SWAGER E0113-0700. USE A HYDRAULIC SWAGER ON LARGER SIZES.

SWAGE SLEEVE



316 & 300 STAINLESS STEEL

S0750-0 SERIES:
1/16" through 1"

CYLINDRICAL TERMINAL



316 STAINLESS STEEL

S0758-0 SERIES:
1/16" through 3/16"

PLAIN BALL



316 STAINLESS STEEL

S0757-0 SERIES:
1/32" through 1/4"

SINGLE SHANK BALL



316 STAINLESS STEEL

S0755-0 SERIES:
1/16" through 3/8"

DOUBLE SHANK BALL



316 STAINLESS STEEL

S0756-0 SERIES:
1/16" through 5/16"

CLEVIS PIN



304 STAINLESS STEEL

P0116-RP SERIES:
3/16" through 1/2"

COTTER PIN SOLD SEPARATELY. FITS MIL. SPEC SWAGE EYE AND FORK.

2 PART WIRE CLAMP/STOP



316 STAINLESS STEEL

S0720-0 SERIES:
1/8" through 1/4"

CAN BE USED IN ARCHITECTURAL FEATURES AS A WIRE CLAMP OR IN SHELVING SYSTEMS AS A STOP CLAMP. PRODUCT SHOULD NEVER BE USED IN LIFTING APPLICATIONS.

CROSS WIRE CLAMP, STANDARD



316 STAINLESS STEEL

S0721-0 SERIES:
1/8" through 1/4"

USE ONLY FOR WIRE ROPE GUIDANCE PURPOSES (NOT AS AN END CONNECTOR).

CROSS WIRE CLAMP, SURFACE MOUNT



316 STAINLESS STEEL

S0722-0 SERIES:
1/8" through 3/16"

USE ONLY FOR WIRE ROPE GUIDANCE PURPOSES. FITTING CAN BE THREADED ON TO SURFACE ANCHOR BOLT.

STAINLESS STEEL INFORMATION CENTER

GENERAL INFORMATION
The many unique values provided by stainless steel make it a powerful candidate in materials selection. Engineer, specifiers and designers often underestimate or overlook these values because of what is viewed as the higher initial cost of stainless steel. However, over the total life of a project, stainless is often the best value option.

WHAT IS STAINLESS STEEL?
Stainless steel is essentially a low carbon steel which contains chromium at 10% or more by weight. It is this addition of chromium that gives the steel its unique stainless, corrosion resisting properties.

The chromium content of the steel allows the formation of a rough, adherent, invisible, corrosion resisting chromium oxide film on the steel surface. If damaged mechanically or chemically, this film is self-healing, providing that oxygen, even in very small amounts, is present. The corrosion resistance and other useful properties of the steel are enhanced by increased chromium content and the addition of other elements such as molybdenum, nickel and nitrogen.

There are more than 60 grades of stainless steel. However, the entire group can be divided into five classes. Each is identified by the alloying elements which affect their microstructure and for which each is named.

BENEFITS OF STAINLESS STEEL

CORROSION RESISTANCE
Lower alloyed grades resist corrosion in atmospheric and pure water environments, while high-alloyed grades can resist corrosion in most acids, alkaline solutions, and chlorine bearing environments, properties which are utilized in process plants.

FIRE AND HEAT RESISTANCE
Special high chromium and nickel-alloyed grades resist scaling and retain strength at high temperatures.

HYGIENE
The easy cleaning ability of stainless makes it the first choice for strict hygiene conditions, such as hospitals, kitchens, abattoirs and other food processing plants.

STRENGTH-TO-WEIGHT ADVANTAGE
The work-hardening property of austenitic grades, that results in a significant strengthening of the material from cold-working alone, and the high strength duplex grades, allow reduced material thickness over conventional grades, therefore cost savings.

EASE OF FABRICATION
Modern steel-making techniques mean that stainless can be cut, welded, formed, machined and fabricated as readily as traditional steels.

IMPACT RESISTANCE
The austenitic microstructure of the 300 series provides high toughness, from elevated temperatures to far below freezing, making these steels particularly suited to cryogenic applications.

LONG TERM VALUE
When the total life cycle costs are considered, stainless is often the least expensive material option. Stainless steel products complete their service life. There is less concern about disposal since this material is 100% recyclable. In fact, over 50% of new stainless steel comes from old remelted stainless steel scrap, thereby completing the full life cycle.



QUICK ATTACH™

QUICK ATTACH™

When safety and reliability are paramount, having the right equipment to secure and stabilize your rigging systems is critical. We offer a range of premium Quick Attach™ Kits and Lifeline Kits designed for both ease of use and maximum durability. These products are trusted across industries such as maritime, construction, and industrial safety, where secure and efficient lifeline systems are essential.

QUICK ATTACH™ EYE



316 STAINLESS STEEL

S0761-0 SERIES:
1/8" through 1/2"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ JAW



316 STAINLESS STEEL

S0762-0 SERIES:
1/8" through 1/2"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ WOOD STUD



316 STAINLESS STEEL

S0777-0 SERIES:
1/8" through 3/16

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ TOGGLE



316 STAINLESS STEEL

S0778-0 SERIES:
1/8" through 5/16"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ WALL TOGGLE



316 STAINLESS STEEL

S0779-0 SERIES:
1/8" through 1/4"

MECHANICAL SWAGE FITTING ALLOWS ATTACHMENT TO A FLAT SURFACE WITH ALIGNMENT THROUGH 160° +/- .

QUICK ATTACH™ RECEIVER



316 STAINLESS STEEL

S0770-0 SERIES:
1/8" through 1/2"

ATTACHMENT USING A BOLT OR STUD THROUGH A PLATE. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ STUD, UNF RIGHT HAND



316 STAINLESS STEEL

S0771-0 SERIES:
1/8" through 1/2"

QUICK ATTACH™ STUD, UNF LEFT HAND



316 STAINLESS STEEL

S0772-0 SERIES:
1/8" through 1/2"

WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ STUD, METRIC RIGHT HAND



316 STAINLESS STEEL

S0775-0 SERIES:
3 mm through 8 mm

WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ PELICAN HOOK



316 STAINLESS STEEL

S0162-QA SERIES:
1/8" through 1/4"

ALL THREADS ARE RIGHT HAND "UNF". S0771-SERIES QUICK ATTACH™ STUDS ARE USED FOR THIS ASSEMBLY. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ STUD AND TOGGLE



316 STAINLESS STEEL

S0764-0 SERIES:
1/8" through 3/8"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ LIFELINE KIT WITH GATE – CLOSED BODY




316 STAINLESS STEEL

C0747-LK01-X:
3/16"

INCLUDES: (1) QA GATE EYE; (1) QA JOINED GATE EYE; (2) QA CLOSED BODY TURNBUCKLES W/TOGGLES & (1) QA PELICAN HOOK.
WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

LIFELINE WIRE ROPE



316 STAINLESS STEEL

WHITE PVC COATED – 7×7 STRAND
S0708-0-C SERIES:
3/16" x 30' through 3/16" x 50'

UNCOATED – 1X19 STRAND
S0701-0-C SERIES:
3/16" x 30' through 3/16" x 50'

FOR USE WITH QUICK ATTACH™ LIFELINE KITS. 1X19 WIRE IS LEFT HAND LAY. 7X7 PVC COATED WIRE IS RIGHT HAND LAY.

QUICK ATTACH™ GATE EYES



316 STAINLESS STEEL

GATE EYE S0776-1905:
3/16"

DOUBLE GATE EYE S0776-2905:
3/16"

RIG A LIFELINE IN MINUTES. SUNCOR LIFELINE SYSTEMS UTILIZE OUR QUICK ATTACH™ SWAGELESS FITTINGS. USE GATE EYES WHERE A GATE IS NEEDED. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ STUD AND WALL TOGGLE



316 STAINLESS STEEL

S0766-0 SERIES:
1/8" through 1/4"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ STUD AND JAW



316 STAINLESS STEEL

S0765-0 SERIES:
1/8" through 3/8"

MECHANICAL SWAGE FITTING ALLOWS FAST ATTACHMENT TO ANY TYPE OF CABLE (1X19, 7X19, OR 7X7) USING SIMPLE TOOLS. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ LIFELINE KIT WITHOUT GATE – CLOSED BODY



316 STAINLESS STEEL

C0747-LK03-X:
3/16"

INCLUDES: (1) QA TOGGLE & (1) QA CLOSED BODY TURNBUCKLE W/TOGGLE. WLL OF QUICK ATTACH™ FITTINGS ARE 75% OF THE WLL OF WIRE USED.

QUICK ATTACH™ WEDGE KIT



STAINLESS WEDGE & BRONZE WASHER

P0760-W SERIES:
1/8" through 1/2"

YOU CAN REUSE YOUR QUICK ATTACH™ TURNBUCKLES AND HARDWARE WITH THIS LOW COST REPLACEMENT WEDGE KIT. IT FEATURES A BRONZE WASHER, 3-PART WEDGE AND WEDGE BAND.

CLIPS & CARABINERS

CLIPS & CARABINERS

Suncor Stainless manufactures a wide variety of 304 and 316 stainless steel spring clips, including trigger, swivel, fixed, double bolt, and mini clips. Commonly called carabiner clips, they are widely used in rope-intensive activities such as climbing, arboriculture, caving, sailing, rope rescue, construction, industrial rope work, and window cleaning.

SPRING CLIP



316 STAINLESS STEEL

S0120-0 SERIES:
3/16" through 1/2"

EACH CLIP IS STAMPED WITH "316" AND WLL (LB). COMMERCIAL GRADE.

SPRING CLIP WITH EYE



316 STAINLESS STEEL

S0121-0 SERIES:
3/16" through 1/2"

EACH CLIP IS STAMPED WITH "316" AND WLL (LB). COMMERCIAL GRADE.

WIDE ASYMMETRICAL CLIP



316 STAINLESS STEEL

S0195-0 SERIES:
3/8" through 7/16"

ALSO AVAILABLE WITH EYE ON SPECIAL ORDER.
BULK ORDERS OF OTHER SIZES MAY BE PLACED ON SPECIAL ORDER.

KEY LOCK SPRING CLIP WITH EYE



316 STAINLESS STEEL

S0181-K SERIES:
3/8" through 7/16"

KEY LOCK SPRING CLIP



316 STAINLESS STEEL

S0120-K SERIES:
3/16" through 1/2"

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD. CLIPS S0120-K050 - K070 MARKED IN KILOGRAMS, WHILE S0120-K080 - K160 ARE MARKED IN KILONEWTONS.

KEY LOCK SPRING CLIP WITH EYE



316 STAINLESS STEEL

S0121-K SERIES:
3/16" through 1/2"

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD. CLIPS S0121-K050 - K070 ARE MARKED IN KILOGRAMS, WHILE S0121-K080 - K160 ARE MARKED IN KILONEWTONS.

SCREW LOCK SPRING CLIP WITH EYE



316 STAINLESS STEEL

S0181-0 SERIES:
1/4" through 15/32"

SCREW LOCK SPRING CLIP



316 STAINLESS STEEL

S0181-X SERIES:
1/4" through 15/32"

SCREW LOCK NUT PREVENTS ACCIDENTAL OPENING.
COMMERCIAL GRADE.

SPRING CLIP WITH SPECIAL GATE



316 STAINLESS STEEL

WITHOUT EYELET S0142-0 SERIES:
5/16" through 7/16"

WITH EYELET S0143-0 SERIES:
5/16" through 7/16"

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILOGRAMS. CONVERSION: KG X 2.2 = LB.

ASYMMETRICAL WIRE LEVER HARNESS CLIP



316 STAINLESS STEEL

S0172-0 SERIES:
1/4" through 1/2"

FORGED

FORGED END. STAMPED WITH WORKING LOAD. FEATURES LONG LASTING TORSION SPRING GATE.

HARNESS CLIP - STRAIGHT BACK



316 STAINLESS STEEL

S0172-S120:
1/2"

FORGED

FORGED END. STAMPED WITH WORKING LOAD. FEATURES LONG LASTING TORSION SPRING GATE. CAN BE USED WITH S0182-0000 MOORING HOOK HOLDER.

HARNESS CLIP WITH D RING



316 STAINLESS STEEL

S0223-8025:
3-1/4"

FORGED

D RING IS FORGED.

ASYMMETRICAL SPRING CLIP



316 STAINLESS STEEL

S0140-0 SERIES:
3" through 4"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD. MARKED IN KILONEWTONS CONVERSION: KN X 224.8 = LB.

POLY GRIP HARNESS CLIP



316 STAINLESS STEEL

S0184-N SERIES:
3/8" through 1/2"

FORGED

FORGED END. STAMPED WITH WORKING LOAD (LB). BREAKING LOAD IS 5 TIMES THE WORK LOAD. FEATURES LONG LASTING TORSION SPRING GATE. POLYURETHANE GRIPS ALLOW FOR SUPERIOR HANDLING.

WIRE LEVER HARNESS CLIP



316 STAINLESS STEEL

S0184-0 SERIES:
1/4" through 1/2"

FORGED

FORGED END. STAMPED WITH WORKING LOAD (LB). FEATURES LONG LASTING TORSION SPRING GATE.

MOORING HOOK HOLDER



316 STAINLESS STEEL

S0182-0000:
2-1/2"

THIS HOLDER WILL ALLOW THE SPRING CLIP TO STAY OPEN IN ORDER TO ATTACH LINE TO MOORING.

SPRING CLIP WITH KEY RING



316 STAINLESS STEEL

S0185-KR60:
2-3/8"

FORGED

THE ENDS OF THE CLIP ARE FORGED. THE 1 INCH KEY RING IS FORMED FROM STAINLESS, THEN NICKEL PLATED FOR SUPERIOR FINISH.

ASYMMETRICAL WIRE LEVER CLIP



316 STAINLESS STEEL

S0141-0 SERIES:
3" through 4"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD. MARKED IN KILOGRAMS CONVERSION: KG X 2.2 = LB.

KEY RING



304 STAINLESS STEEL

S0185-KR SERIES:
0.05" through 0.08"

304 STAINLESS STEEL WITH NICKEL PLATING. MINIMUM PURCHASE OF 100.

SWIVEL WEB CLIP



316 STAINLESS STEEL

S0221-0 SERIES:
1" through 2"

"SLIMLINE" BAIL FOR WEBBING; SPECIAL TORSION SPRING GATE FOR LONGER LIFE. IDEAL FOR BIMINI TOPS AND HOLD DOWN STRAPS.

EXTRA LARGE SCREW LOCK HARNESS CLIP



ALUMINUM

A0149-0013 SERIES:
1/2"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

EXTRA LARGE CLIP – SCREW LOCK



CARBON STEEL W/BRASS LOCK

Z0149-0013:
1/2"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

OPEN OUT SLIDE LOCK CLIP



316 STAINLESS STEEL

S0145-0 SERIES:
5/16" through 3/8"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

MINI CLIP



316 STAINLESS STEEL

S0185-0035:
1-3/8"

USE ANYWHERE A SMALL CLIP IS NEEDED. USE FOR CAMERAS, FLASHLIGHTS AND MORE. THE SMALLEST HIGH QUALITY STAINLESS CLIP AVAILABLE.

FIXED BIMINI CLIP



304 STAINLESS STEEL

S0220-0025:
1"

THIS CLIP IS IDEAL FOR BIMINI TOPS AND HOLD-DOWN STRAPS.

EXTRA LARGE SCREW LOCK HARNESS CLIP



316 STAINLESS STEEL

S0149-0013:
1/2"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

EXTRA LARGE CLIP – AUTO LOCK



ALUMINUM A0147-0013:
1/2"

STAINLESS STEEL S0147-0013:
1/2"

CARBON STEEL Z0147-0013
1/2"

FORGED

PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS.

AUTO LOCK HARNESS CLIP



ALUMINUM A0146-0012:
7/16"

STAINLESS STEEL S0146-0012:
7/16"

ZINC-PLATED CARBON STEEL Z0146-0012:
7/16"

FORGED

PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS.

SCREW LOCK HARNESS CLIP



ALUMINUM

W/BRASS LOCK A0148-0008:
5/16"

W/ALUMINUM LOCK A0148-0010 & A0148-0012:
3/8" through 7/16"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. CONVERSION: KN X 224.8 = LB. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

SCREW LOCK HARNESS CLIP



ZINC-PLATED CARBON STEEL WITH BRASS LOCK

Z0148-0 SERIES:
5/16" through 7/16"

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. CONVERSION: KN X 224.8 = LB. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

SCREW LOCK HARNESS CLIP



316 STAINLESS STEEL WITH STAINLESS LOCK

S0148-0 SERIES:
5/16" through 7/16"

FORGED

EACH CLIP IS PROOF TESTED AND STAMPED WITH THE BREAK LOAD IN KILONEWTONS. CONVERSION: KN X 224.8 = LB. BREAK LOAD IS APPROXIMATELY 3 TIMES THE WORK LOAD LIMIT.

FREQUENTLY PURCHASED WITH CLIPS & CARABINERS:



SINGLE JACKLINE WITH LOOP
C0240-0-L-B SERIES



HEAVY DUTY DIAMOND PAD EYE
S3703-0 SERIES



THE EFFECT OF TEMPERATURE ON THE WORKING LOAD LIMIT (WLL) OF STAINLESS STEEL PRODUCTS

TEMPERATURE		REDUCTION OF WORKING LOAD LIMIT	
FAHRENHEIT	CELSIUS	WHILE AT TEMPERATURE	AFTER EXPOSURE TO TEMPERATURE
BELOW 400°F	BELOW 204°C	NONE	**NONE**
400° – 800°F	204° – 426°C	0-10%	**NONE**
801° – 1,000°F	427° – 537°C	20%	**NONE**
1,001° – 1,200°F	538° – 649°C	30%	**NONE**
1,201° – 1,300°F	650° – 704°C	40%	**NONE**
1,301° – 1,400°F	705° – 760°C	50%	**NONE**
1,401° – 1,500°F	761° – 815°C	60%	**NONE**
1,501° – 1,600°F	816° – 871°C	75%	**NONE**

SNAPS

STAINLESS STEEL SNAPS

Suncor Stainless manufactures a wide variety of stainless steel snap fasteners, swivel eye snaps and fixed eye snaps including, trigger, swivel, fixed and double bolt. All of our stainless steel snap fasteners are made from high quality grade 304 or 316 stainless steel.

TRIGGER SNAP "D" BAIL



316 STAINLESS STEEL

S0192-0 SERIES:
5/8" through 1"

TRIGGER SNAP EYE BAIL



316 STAINLESS STEEL

S0193-0 SERIES:
1/2" through 5/8"

SWIVEL EYE SNAP



316 STAINLESS STEEL

S0174-0 SERIES:
5/8" through 7/8"

WIRE LEVER SWIVEL EYE SNAP



316 STAINLESS STEEL

S0166-0003:
3/4"

FIXED EYE SNAP



316 STAINLESS STEEL

S0175-0 SERIES:
3/8" through 7/8"

SWIVEL BOLT SNAP



316 STAINLESS STEEL

S0176-0000 - S0176-0004:
3/8" through 1-1/4"

DOUBLE BOLT SNAP



316 STAINLESS STEEL

S0176-0900 - S0176-1200:
3-5/8" through 4-3/4"

ALLOWS EASY CONNECTION AND DISCONNECTION AT EITHER END.

US NAVY BOLT SNAP



316 STAINLESS STEEL

S0177-USN6:
6-1/2"

BUREAU OF SHIPS NUMBER: S8101A1,464,418 PRODUCT IS USUALLY ATTACHED TO CHAIN WITH OPEN END, WHICH IS THEN BENT CLOSED.

FIXED SNAP SHACKLE



316 STAINLESS STEEL

S0158-0 SERIES:
2" through 4"



THE UNIVERSAL LANYARD (S0157-T000) CAN BE ATTACHED TO SNAP SHACKLES FOR A QUICK AND EASY RELEASE.

JAW SWIVEL SNAP SHACKLE



316 STAINLESS STEEL

S0170-0 SERIES:
2-3/4" through 5"



STAMPED BAIL. REMOVABLE JAW PIN.
THE UNIVERSAL LANYARD (S0157-T000) CAN BE ATTACHED TO SNAP SHACKLES FOR A QUICK AND EASY RELEASE.

SWIVEL SNAP SHACKLE



316 STAINLESS STEEL

S0157-0 SERIES:
2-3/4" through 5"



THE UNIVERSAL LANYARD (S0157-T000) CAN BE ATTACHED TO SNAP SHACKLES FOR A QUICK AND EASY RELEASE.

SWIVEL SNAP SHACKLE W/WEB CLIP



316 STAINLESS STEEL

S0153-0 SERIES:
2-3/4" through 3-1/2"

ROPE SNAP SHACKLE



316 STAINLESS STEEL

S0159-0 SERIES:
2" through 3-3/4"



THE UNIVERSAL LANYARD (S0157-T000) CAN BE ATTACHED TO SNAP SHACKLES FOR A QUICK AND EASY RELEASE.

SPRING GATE SNAP



316 STAINLESS STEEL

S0161-0 SERIES:
2" through 3-3/4"

HEAVY DUTY JAW SWIVEL SNAP SHACKLE



316 STAINLESS STEEL

S0171-0 SERIES:
2-3/4" through 5"



REMOVABLE CLEVIS PIN.
THE UNIVERSAL LANYARD (S0157-T000) CAN BE ATTACHED TO SNAP SHACKLES FOR A QUICK AND EASY RELEASE.

HEAVY DUTY SWIVEL SNAP SHACKLE



17-4PH STAINLESS STEEL

S0157-HD02:
3-5/8"



THE UNIVERSAL LANYARD (S0157-T000) CAN BE ATTACHED TO SNAP SHACKLES FOR A QUICK AND EASY RELEASE.

CHAIN SWIVEL SNAP



316 STAINLESS STEEL

S0645-0005:
5/32-3/16"

STANDARD OR LONG LINK CHAIN, UP TO 3/16" (WIRE) SIZE, CAN BE ATTACHED TO CLIP. USE CLIP AT THE END OF TWIST LINK CHAIN FOR A DOG LEASH OR AT THE END OF A KILL CORD FOR WATERCRAFTS.

JIB HANK



BRONZE

B0169-0 SERIES:
1-1/2" through 3"

LINKS, RINGS & HOOKS

STAINLESS STEEL LINKS, RINGS & HOOKS

Stainless steel hardware components, such as links, rings, pins, and hooks, are integral to a wide range of industrial and commercial applications due to their unmatched durability, strength, and resistance to corrosion. Made from high-quality stainless steel, these components offer exceptional performance even in the harshest environments, making them ideal for industries like marine, construction, automotive, and aerospace.

QUICK LINK



316 STAINLESS STEEL

S0160-0 SERIES:
1/8" through 23/32"

LONG QUICK LINK



316 STAINLESS STEEL

S0160-LA SERIES:
1/8" through 3/4"

DELTA QUICK LINK



316 STAINLESS STEEL

S0160-DX SERIES:
1/8" through 23/32"

PEAR QUICK LINK



316 STAINLESS STEEL

S0160-PR SERIES:
1/8" through 5/8"

BULK ORDERS ON ALL OTHER TYPES AND SIZES OF QUICK LINKS ARE AVAILABLE ON SPECIAL ORDER.

SQUARE QUICK LINK



316 STAINLESS STEEL

S0160-SQ SERIES:
1/8" through 5/8"

RECTANGULAR RING



316 STAINLESS STEEL

S0139-R SERIES:
3/16" through 5/16"

304 STAINLESS STEEL

S0139-R-1 SERIES:
1/8" through 1/2"

MEETS REQUIREMENTS OF MIL-DTL-32655.

ROUND RING



316 STAINLESS STEEL

S0139-0 SERIES:
1/8" through 1/2"

*MEETS REQUIREMENTS OF MIL-DTL-32655 (*EXCLUDING S0139-0430). SPECIAL BULK ORDERS ON OTHER SIZES ARE AVAILABLE.*

ROUND RING



304 STAINLESS STEEL

S0139-0-1 SERIES:
1/8" through 5/16"

S0139-0670-1 MEETS REQUIREMENTS OF MIL-DTL-32655. SPECIAL BULK ORDERS ON OTHER SIZES ARE AVAILABLE.

"D" RING



316 STAINLESS STEEL

S0139-X SERIES:
1/8" through 5/16"

304 STAINLESS STEEL

S0139-X-1 SERIES:
1/8" through 1/2"

*MEETS REQUIREMENTS OF: MIL-DTL-32655 (*EXCLUDING S0139-X640).*

HEAVY DUTY "D" RING



316 STAINLESS STEEL

S0222-F SERIES:
1" through 2"

*MEETS REQUIREMENTS OF: MIL-DTL-32655 (*EXCLUDING S0222-F050).*

TRIANGLE RING



316 STAINLESS STEEL

S0139-T SERIES:
3/16" through 1/4"

304 STAINLESS STEEL

S0139-T-1 SERIES:
1/8" through 1/2"

MEETS REQUIREMENTS OF: MIL-DTL-32655.

MASTER LINK



316 STAINLESS STEEL

S0650-0 SERIES:
3/8" through 1-1/4"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655. MEETS ASME B30.26-2010 SECTION 26-4.0. EACH LINK IS INTEGRAL FORGED, NOT WELDED, AND IS STAMPED WITH SIZE AND WORKING LOAD.

MASTER LINK – WELD



316 STAINLESS STEEL

S0650-W SERIES:
3/8" through 1-1/4"

FORGED

FORGED MASTER LINK FOR EASY CREATION OF CUSTOM SLINGS. LINK FEATURES 1" TO 3" GAP TO ENABLE THE ADDITION OF CHAIN, LINKS, THIMBLES, ETC.

MASTER LINK WITH LEGS



316 STAINLESS STEEL

S0652-0 SERIES:
1/2" through 1-1/4"

FORGED

EACH MASTER LINK IS INTEGRAL FORGED, THEN WELDED, AND IS STAMPED WITH SIZE AND WORKING LOAD.

HAMMERLOCK LINK



316 STAINLESS STEEL

S0655-0 SERIES:
3/16" through 5/8"

FORGED

MEETS REQUIREMENTS OF: MIL-DTL-32655.

HAMMERLOCK PIN AND BUSHING SET



316 STAINLESS STEEL

S0655-KT SERIES:
3/16" through 5/8"

REPLACEMENT PIN SET-INCLUDES PIN, BUSHING AND ROLL PIN.

SLING IDENTIFICATION TAG



304 STAINLESS STEEL

S0600-0 SERIES:
2.50" through 3.50"

MADE IN USA

TAG USED TO PERMANENTLY MARK SLINGS FOR OVERHEAD LIFTING AND SHOW MAXIMUM WORKING LOADS AT DIFFERENT ANGLES. MARKING SERVICES AVAILABLE. BLANK TAG ALSO AVAILABLE WITH SUNCOR LOGO ONLY.

"C" CONNECT LINK



316 STAINLESS STEEL

S0165-0 SERIES:
3/16" through 3/4"

QUICK CONNECT AND DISCONNECT ARE ACHIEVED BY TURNING LINKS 90 DEGREES TO EACH OTHER. SOLD INDIVIDUALLY.

CAST CONNECTING LINK



316 STAINLESS STEEL

S0460-0 SERIES:
3/16" through 5/8"

DO NOT USE WITHOUT RIVETING PINS SECURELY.

FORGED CONNECTING LINK



316 STAINLESS STEEL

S0660-0 SERIES:
1/4" through 3/8"

FORGED

SIZE IS PERMANENTLY FORGED INTO EACH PART DURING PRODUCTION. WLL ARE 25% OF BREAKING LOAD. DO NOT USE WITHOUT RIVETING PINS SECURELY.

LAP LINK



316 STAINLESS STEEL

S0465-0 SERIES:
3/16" through 5/16"

SPECIAL BULK ORDERS ON OTHER SIZES ARE AVAILABLE.

EYE HOOK



316 STAINLESS STEEL

S0194-0 SERIES:
3/4" through 1-1/8"

WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. INCLUDES REMOVABLE SAFETY LATCH.

SWIVEL EYE HOOK



316 STAINLESS STEEL

S0455-0 SERIES:
4" through 8"

LIGHT DUTY SWIVEL HOOK. WORKING LOADS ARE BASED ON GRADUAL PULL, NOT SHOCK LOADS. INCLUDES REMOVABLE LATCH. STAMPED WITH SIZE AND WORKING LOAD.

SWIVEL EYE HOOK LATCH KIT



316 STAINLESS STEEL

Z0455-L SERIES:
4" through 8"

INCLUDES REPLACEMENT LATCH, SPRING AND PIN. COMPATIBLE WITH S0455 SERIES SWIVEL EYE HOOKS ABOVE. STYLES MAY VARY BY SIZE.

PELICAN HOOK WITH SLIDE



316 STAINLESS STEEL

S0180-0 SERIES:
4" through 5-3/4"

"U" HOOK



316 STAINLESS STEEL

S0179-0 SERIES:
1/4" through 3/8"

"S" HOOK



316 STAINLESS STEEL

S0178-0 SERIES:
1/8" through 5/16"

BULK ORDERS OF OTHER SIZES OR TYPES MAY BE PLACED ON SPECIAL ORDER.

WELDED "S" WEB HOOK



316 STAINLESS STEEL

S0212-0 SERIES:
1" through 2"

QUALITY "S" HOOK IS WELDED TO PREVENT WEBBING FROM SLIPPING THROUGH. BULK ORDERS OF OTHER SIZES OR TYPES MAY BE PLACED ON SPECIAL ORDER.

DOWNHAUL HOOK



316 STAINLESS STEEL

S0179-H SERIES:
5/16" through 3/8"

CAN BE USED IN SAILING APPLICATIONS OR AS CARGO LASHING HOOK.

REEFING HOOK



316 STAINLESS STEEL

S0179-R SERIES:
5/16" through 3/8"

ATTACHMENT END IS FORGED FLAT FOR EASY INSTALLATION.

TACK HOOK



316 STAINLESS STEEL

S0179-T SERIES:
5/16" through 3/8"

CAN BE USED IN SAILING APPLICATIONS OR AS CARGO LASHING HOOK. ATTACHMENT END IS FORGED FLAT FOR EASY INSTALLATION.

CUNNINGHAM HOOK



316 STAINLESS STEEL

S0179-CH SERIES:
1/4" through 5/16"

DOUBLE "J" WEB HOOK



316 STAINLESS STEEL

S0211-0 SERIES:
1" through 2"

HOG RING & SHOCKCORD ENDS



304 STAINLESS STEEL

HOG RINGS S0183-0 SERIES:
3/16" through 1/2"

SHOCKCORD ENDS S0183-SC SERIES:
3/16" through 1/2"

BRACELET STRAP



316 STAINLESS STEEL

S0102-0005:
3/16"

MAKE YOUR OWN SURVIVAL BRACELET. STRAP FEATURES SLEEK, CURVED DESIGN TO FIT COMFORTABLY ON WRIST. MULTIPLE HOLES FOR EASY ADJUSTMENT UTILIZING A SHACKLE. COMPATIBLE WITH SHACKLE S0115-CP05.

BRACELET STRAP WITH SHACKLE



316 STAINLESS STEEL

S0102-KT05:
3/16"

MAKE YOUR OWN SURVIVAL BRACELET. STRAP FEATURES SLEEK, CURVED DESIGN TO FIT COMFORTABLY ON WRIST. SHACKLE FEATURES CAPTIVE PIN FOR EASY REMOVAL AND ADJUSTMENT WITHOUT LOSS OF PIN.

QUICK LOCK PIN



316 STAINLESS STEEL

S0375-0 SERIES:
3/16" through 3/8"

ALL "QUICK" & "QUICKLOCK" PIN WORKING LOADS ARE CALCULATED IN DOUBLE SHEAR AND NOT AS PULL OUT FORCE, WHICH IS UNRATED.

QUICK PIN



316 STAINLESS STEEL

S0370-0 SERIES:
3/16" through 3/8"

ALL "QUICK" & "QUICKLOCK" PIN WORKING LOADS ARE CALCULATED IN DOUBLE SHEAR AND NOT AS PULL OUT FORCE, WHICH IS UNRATED.

HINGES & HASPS

STAINLESS STEEL HINGES & HASPS

Suncor Stainless manufactures a wide range of stainless steel hinges & hasps available in grades 304 and 316 for maximum corrosion resistance. Built for rugged durability, this specialized lineup includes heavy-duty stainless steel options and secure light- to heavy-duty hasps. Choose from ergonomic flush lift rings, handles, and a comprehensive selection of hinges, including T-hinge, strap, flush, offset, take-apart, butt, hatch, and flush table styles. Commercial or marine, our hardware ensures lasting performance.

STRAP HINGE



304 STAINLESS STEEL

S3825-0002:
6″

STAMPED HINGE WITH WELL ROUNDED EDGES AND RECESSED FASTENER HOLES FOR BETTER APPEARANCE.

HEAVY DUTY STRAP HINGE



316 STAINLESS STEEL

S3820-0 SERIES:
4″ through 6-3/8″

HEAVY DUTY HINGE WITH PRECISION CAST COMPONENTS. PIN IS STAINLESS AND WELDED ON ONE SIDE TO PREVENT IT FROM WORKING LOOSE.

HEAVY DUTY WIDE STRAP HINGE



316 STAINLESS STEEL

S3832-0 SERIES:
4″ through 6″

EXCLUSIVE FLUSH DESIGN CAN MOVE 360 DEGREES. ONE HALF FOLDS FLAT ON TOP OF OTHER HALF.

HEAVY DUTY FLUSH STRAP HINGE



316 STAINLESS STEEL

S3831-0 SERIES:
4″ through 6″

EXCLUSIVE FLUSH DESIGN CAN MOVE 360 DEGREES. ONE HALF FOLDS FLAT ON TOP OF OTHER HALF.

HEAVY DUTY STRAP T-HINGE



316 STAINLESS STEEL

S3834-0007:
7″

PRECISION CAST COMPONENTS. PIN IS STAINLESS AND WELDED ON ONE SIDE TO PREVENT IT FROM WORKING LOOSE.

HEAVY DUTY DOOR HINGE – EQUAL



316 STAINLESS STEEL

S3822-0 SERIES:
3″ through 4″

PRECISION CAST COMPONENTS. PIN IS STAINLESS AND WELDED ON ONE SIDE TO PREVENT IT FROM WORKING LOOSE.

HEAVY DUTY FLUSH DOOR HINGE



316 STAINLESS STEEL

S3830-0 SERIES:
3″ through 4″

EXCLUSIVE FLUSH DESIGN CAN MOVE 360 DEGREES. ONE HALF FOLDS FLAT ON TOP OF OTHER HALF.

HEAVY DUTY DOOR HINGE – UNEQUAL



316 STAINLESS STEEL

S3823-0 SERIES:
2-1/4″ through 2-7/8″

HEAVY DUTY HINGE WITH PRECISION CAST COMPONENTS. PIN IS STAINLESS AND WELDED ON ONE SIDE TO PREVENT IT FROM WORKING LOOSE.

DOOR HINGE – OFFSET



304 STAINLESS STEEL

S3827-2000:
1-7/16″

STAMPED HINGE WITH WELL ROUNDED EDGES AND RECESSED FASTENER HOLES FOR BETTER APPEARANCE.

HEAVY DUTY TAKE APART HINGE



316 STAINLESS STEEL

S3824-2000:
3-1/2″

PRECISION CAST COMPONENTS. LOCKING TAB PREVENTS HINGE FROM COMING APART ACCIDENTALLY.

HEAVY DUTY FLUSH TABLE HINGE



316 STAINLESS STEEL

S3833-0001:
3-1/4″

EXCLUSIVE FLUSH DESIGN CAN MOVE 360 DEGREES. ONE HALF FOLDS FLAT ON TOP OF OTHER HALF.

HEAVY DUTY HATCH HINGE – STANDARD



316 STAINLESS STEEL

S3824-0075:
3″

PRECISION CAST COMPONENTS. PIN IS STAINLESS AND REMOVABLE.

FLUSH LIFT HANDLE



316 STAINLESS STEEL

S3851-0002:
3″

PRECISION CAST COMPONENTS.

HEAVY DUTY DOOR HINGE – OFFSET



316 STAINLESS STEEL

S3823-1000:
2″

PRECISION CAST COMPONENTS. PIN IS STAINLESS AND WELDED ON ONE SIDE TO PREVENT IT FROM WORKING LOOSE.

HEAVY DUTY BUTT HINGE



316 STAINLESS STEEL

S3821-0 SERIES:
1-1/2″ through 2″

PRECISION CAST COMPONENTS. PIN IS STAINLESS AND WELDED ON ONE SIDE TO PREVENT IT FROM WORKING LOOSE.

HEAVY DUTY HATCH HINGE – ANGLE BASE



316 STAINLESS STEEL

S3824-1075:
3″

PRECISION CAST COMPONENTS. PIN IS STAINLESS AND REMOVABLE.

HEAVY DUTY FLUSH LIFT RING




316 STAINLESS STEEL

S3851-0 SERIES:
2-1/2″ through 1-7/8″

PRECISION CAST COMPONENTS.

FLUSH LIFT PULL



304 STAINLESS STEEL

S3851-0003:
2-1/2″

SPRING LOADED. STAMPED VERSION WITH ROUNDED INSIDE EDGE OF PULL RING.

SAFETY HASP



304 STAINLESS STEEL

S3853-0001:
2-3/4"

HEAVY DUTY SAFETY HASP



316 STAINLESS STEEL

S3853-0002:
3"

HEAVY DUTY SAFETY HASP WITH SWIVEL PAD EYE, THAT ROTATES AND ALLOWS LOCKING OF HASP WITHOUT THE USE OF A LOCK. ALL COMPONENTS ARE PRECISION CAST.

HEAVY DUTY BARREL BOLT



316 STAINLESS STEEL

S3855-0 SERIES:
3-5/8" through 4-1/4"

PRECISION CAST COMPONENTS (NO PART IS STAMPED).

HEAVY DUTY DOOR HOOK SET



316 STAINLESS STEEL

S3850-0:
3" through 4"

SOLD AS A SET. POLISHED TO A MIRRORLIKE FINISH. ADDITIONAL LATCH PART (S3850-02LT) AVAILABLE WHERE DOOR NEEDS TO BE SECURED IN OPEN AND CLOSED POSITION.

FOLDING TABLE BRACKET



316 STAINLESS STEEL

S3835-0 SERIES:
12" through 16"

SPACE SAVING DESIGN ADJUSTS TO THREE DIFFERENT POSITIONS AND FOLDS AGAINST WALL WHEN NOT IN USE. USE IN 90° POSITION FOR EATING OR SEATING, 80° FOR READING OR 70° FOR DRAFTING.

FOR OTHER BOATING HARDWARE ITEMS SEE:



RAILING & BIMINI SECTION
STARTING ON PG. 68



DECK HARDWARE SECTION
STARTING ON PG. 72

WHY CHOOSE STAINLESS STEEL OVER OTHER MATERIALS?

CORROSION RESISTANCE
Lower alloyed grades resist corrosion in atmospheric and pure water environments, while high-alloyed grades can resist corrosion in most acids, alkaline solutions, and chlorine bearing environments, properties which are utilized in process plants.

STRENGTH-TO-WEIGHT ADVANTAGE
The work-hardening property of austenitic grades, that results in a significant strengthening of the material from cold-working alone, and the high strength duplex grades, allow reduced material thickness over conventional grades and therefore, cost savings.

LONG-TERM VALUE
When the total life cycle costs are considered, stainless steel is often the least expensive material option.

IMPACT RESISTANCE
The austenitic microstructure of the 300 series provides high toughness, from elevated temperatures to far below freezing, making these steels particularly suited to cryogenic applications.

FIRE AND HEAT RESISTANCE
Special high Chromium and Nickel-alloyed grades resist scaling and retain strength at high temperatures.

STAINLESS STEEL IS A "GREEN" MATERIAL
To ensure a high quality of life, the materials that we use as consumers and manufacturers should meet not only technical performance standards, but have a long service life, be usable in a great number of applications, and be environmentally friendly. Once their service is complete, they should be 100% recyclable, thereby completing the life cycle to be used once again. Stainless steel is such a material.

FASTENERS

STAINLESS STEEL FASTENERS

Stainless steel fasteners, U-bolts, and threaded accessories are essential components in virtually every industry that requires secure, durable, and corrosion-resistant connections. Crafted from high-quality stainless steel, these products provide superior strength, longevity, and resistance to rust and degradation, even in the most challenging environments.

J-BOLT



304 STAINLESS STEEL

S0358-0 SERIES:
3/16" through 1/2"

ALL THREADS ARE STANDARD UNC.

LONG U-BOLT



304 STAINLESS STEEL

S0352-0 SERIES:
1/4" through 7/8"

EACH U-BOLT SET INCLUDES 4 NUTS, WASHERS ARE AVAILABLE SEPARATELY.

SQUARE U-BOLT



304 STAINLESS STEEL

S0356-1 SERIES:
3/8"

EACH SET INCLUDES 2 NUTS AND 2 WASHERS. THREADS ARE "UNC" 3/8"-16.

TRAILER U-BOLT



304 STAINLESS STEEL

S0276-1 SERIES:
1/2"

STAINLESS TRAILER U-BOLTS ARE INTENDED TO REPLACE OR UPGRADE ORIGINAL TRAILER PARTS. EACH SET INCLUDES 2 NUTS AND 2 WASHERS.

STANDARD U-BOLT



304 STAINLESS STEEL

S0350-0 SERIES:
1/4" through 1/2"

ALL THREADS ARE UNC AND SET INCLUDES 2 NUTS. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. BULK QUANTITY OF CUSTOM SIZES MAY BE SPECIAL ORDERED.

U-BOLT WITH PLATE



304 STAINLESS STEEL

S0351-0 SERIES:
1/4" through 1/2"

ALL THREADS ARE UNC AND SET INCLUDES 2 NUTS. EXTRA NUTS AND WASHERS ARE AVAILABLE FROM STOCK. BULK QUANTITY OF CUSTOM SIZES MAY BE SPECIAL ORDERED.

BOW/STERN EYE



304 STAINLESS STEEL

S0353-1 SERIES:
3/8" through 1/2"

EACH U-BOLT SET INCLUDES 4 NUTS (2 STANDARD AND 2 BEVELED), 1 BOW PLATE AND 1 STERN PLATE. THREADS ARE "UNC".

MACHINE SCREW, FLATHEAD



316 STAINLESS STEEL

S0910-0 SERIES:
#8-32 through 5/16"-18

BULK SIZES AVAILABLE

MATCHING WASHERS AND NUTS ARE AVAILABLE.

MACHINE SCREW, PANHEAD



316 STAINLESS STEEL

S0911-0 SERIES:
#8-32 through 5/16"-18

BULK SIZES AVAILABLE

MATCHING WASHERS, NUTS AND STAINLESS PHILLIPS HEAD DRIVER BITS ARE AVAILABLE.

WOOD SCREW, PANHEAD



316 STAINLESS STEEL

S0913-0 SERIES:
#10 X (1") through #20 (5/16")

BULK SIZES AVAILABLE



APPLY FASTENER LUBRICANT (E0102-0000) TO ANY THREADED SURFACE TO EASE THREADING. VERY EFFECTIVE ON WOOD SCREWS TO ELIMINATE STRIPPING OF SCREW HEADS AND SPEED INSTALLATION.

HEX NUT, UNC



316 STAINLESS STEEL

LEFT HAND UNC
S0302-0 SERIES:
3/16" through 1-1/2"

RIGHT HAND UNC
S0303-0 SERIES:
#8 (1/8") through 1-1/2"

BULK SIZES AVAILABLE

HEX NUT, METRIC



316 STAINLESS STEEL

RIGHT HAND METRIC
S0303-MM SERIES:
5 MM through 20 MM

BULK SIZES AVAILABLE

HEX NUT BLANKS



316 STAINLESS STEEL

P0303-U SERIES:
5/8" & M16 through 1-1/2" & M39

BULK SIZES AVAILABLE

THESE ARE UNTHREADED BLANKS THAT NEED TO BE THREADED. SUNCOR OFFERS THREADING SERVICES. DESIGNED TO BE UNIVERSAL, EACH BLANK SIZE CAN BE UNC, UNF OR METRIC THREADED.

WOOD SCREW, FLATHEAD



316 STAINLESS STEEL

S0914-0 SERIES:
#8 through #20 (5/16")

BULK SIZES AVAILABLE



APPLY FASTENER LUBRICANT (E0102-0000) TO ANY THREADED SURFACE TO EASE THREADING. VERY EFFECTIVE ON WOOD SCREWS TO ELIMINATE STRIPPING OF SCREW HEADS AND SPEED INSTALLATION.

STAINLESS DRIVER BITS



410 STAINLESS STEEL

PHILLIPS E0101-PH SERIES:
#2 through #3

SQUARE E0101-SL SERIES:
#2

USING STAINLESS DRIVER BITS PREVENTS CONTAMINATION OF STAINLESS SCREW HEADS.

HEX NUT, UNF



316 STAINLESS STEEL

LEFT HAND UNF
S0304-0 SERIES:
3/16" through 7/8"

RIGHT HAND UNF
S0305-0 SERIES:
3/16" through 7/8"

BULK SIZES AVAILABLE

NYLON INSERT LOCK NUT



316 STAINLESS STEEL

RIGHT HAND UNC
S0303-NI SERIES:
#10 through 5/16"

BULK SIZES AVAILABLE

ACORN NUT



316 STAINLESS STEEL

S0306-0 SERIES:
3/16" through 3/4"

BULK SIZES AVAILABLE

FEATURES UNC THREADS.

WING NUT



316 STAINLESS STEEL

S0301-0 SERIES:
3/16" through 5/8"

BULK SIZES AVAILABLE

*HEAVY DUTY, PRECISION CAST WING NUT. ALL THREADS ARE RIGHT HAND, STANDARD UNC. *S0301-0007, -0008 & -0010 HAVE SQUARED WINGS.*

FLAT WASHER




316 STAINLESS STEEL

P0113-WA SERIES:
#8 (1/8") through #20 (5/16")

BULK SIZES AVAILABLE

COMPATIBLE FASTENERS AND NUTS ARE AVAILABLE.

FENDER WASHER



316 STAINLESS STEEL

P0113-FW SERIES:
1/4" through 1/2"

BULK SIZES AVAILABLE

LOCK WASHER – SPLIT



316 STAINLESS STEEL

P0113-SW SERIES:
#8 (1/8") through #20 (5/16")

BULK SIZES AVAILABLE

COMPATIBLE FASTENERS AND NUTS ARE AVAILABLE.

LAG SCREW



304 STAINLESS STEEL

S0335-0 SERIES:
1/4" through 5/8"

WITH SHARP POINTS AND COARSE THREADS, THESE LAG SCREWS ARE DESIGNED TO PENETRATE AND GRIP WOOD. CAN BE USED IN DOCK AND PIER CONSTRUCTION. PILOT HOLE RECOMMENDED.

HEX HEAD BOLT



316 STAINLESS STEEL

S0336-0 SERIES:
1/4" through 5/8"

ALL THREADS ARE RIGHT HAND, STANDARD UNC.

THREADED ROD, UNC



316 STAINLESS STEEL

S0300-0 SERIES:
1/4" through 1"

ALL THREADS ARE STANDARD UNC. RODS WITH METRIC THREAD CAN BE SPECIAL ORDER.

SPIKE NAIL



304 STAINLESS STEEL

S0340-1 SERIES:
3/8"

THESE HEAVY DUTY NAILS ARE GREAT FOR DOCK & PIER CONSTRUCTION. CORROSION RESISTANT FOR LONG LASTING STRENGTH.

THREAD INSERT, UNC



316 STAINLESS STEEL

S0385-0 SERIES:
3/16" through 3/8"

SPECIAL FITTING WITH "KNIFE THREADS" ON OUTSIDE AND STANDARD UNC ON INSIDE. USED TO CONNECT HORIZONTAL WIRE ROPE TO WOODEN POSTS & ATTACH OTHER FASTENERS TO WOOD, PLASTIC OR CARBON FIBER.

RIVET NUT INSERT



316 STAINLESS STEEL

UNC, RIGHT AND LEFT HAND
S0382-0 SERIES & S0382-L007:
3/16" through 3/8"

UNF, RIGHT AND LEFT HAND
S0381-0007 & S0381-L007:
1/4"

FOR INSTALLATION IN THIN WALL METAL PLATES OR TUBES. RIVET NUT INSTALLATION TOOL IS ITEM #S0380-0000.

TIE DOWNS & HARDWARE

TIE DOWNS & HARDWARE

Suncor Stainless manufactures a complete line of webbing assemblies and stainless steel webbing hardware for industrial and marine applications. Suncor's webbing assemblies are available in a variety of combinations including hooks, clips and loops. Suncor also manufactures ratchet assemblies, cover tie-downs, hanging kits and strap kits for marine, industrial and everyday use.

RATCHET ASSEMBLY WITH CLIPS



304 & 316 STAINLESS STEEL & WEBBING

S0201-0 SERIES: 1"
S0203-0 SERIES: 1.5"
S0204-0 SERIES: 2"

AVAILABLE IN BLACK, BLUE OR WHITE WEBBING.

THE RATCHET ASSEMBLY WITH CLIPS IS AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2" TO FIT EVERY PROJECT, BIG OR SMALL. IT FEATURES A STAINLESS STEEL RATCHET BUCKLE, TWO STAINLESS STEEL HARNESS CLIPS AND HIGH-QUALITY NYLON WEBBING.

RATCHET ASSEMBLY WITH "J" HOOKS



304 STAINLESS STEEL & WEBBING

S0201-JJ SERIES: 1"
S0203-JJ SERIES: 1.5"
S0204-JJ SERIES: 2"

AVAILABLE IN BLACK OR BLUE WEBBING.

THE RATCHET ASSEMBLY WITH "J" HOOKS IS AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2" TO FIT EVERY PROJECT, BIG OR SMALL. IT FEATURES A STAINLESS STEEL RATCHET BUCKLE, TWO STAINLESS STEEL "J" HOOKS AND HIGH-QUALITY NYLON WEBBING.

RATCHET ASSEMBLY WITH "S" HOOKS



304 & 316 STAINLESS STEEL & WEBBING

S0201-SS SERIES: 1"
S0203-SS SERIES: 1.5"
S0204-SS SERIES: 2"

AVAILABLE IN BLACK OR BLUE WEBBING.

THE RATCHET ASSEMBLY WITH "S" HOOKS IS AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". IT FEATURES A STAINLESS STEEL RATCHET BUCKLE, TWO STAINLESS STEEL WELDED "S" HOOKS AND HIGH-QUALITY NYLON WEBBING.

RATCHET ASSEMBLY WITH FLAT HOOKS



304 STAINLESS STEEL & WEBBING

S0201-FH SERIES: 1"
S0203-FH SERIES: 1.5"
S0204-FH SERIES: 2"

AVAILABLE IN BLACK OR BLUE WEBBING.

THE RATCHET ASSEMBLY WITH FLAT HOOKS IS AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". IT FEATURES A STAINLESS STEEL RATCHET BUCKLE, TWO STAINLESS STEEL FLAT HOOKS AND HIGH QUALITY NYLON WEBBING.

CAM BUCKLE ASSEMBLY WITH "J" HOOKS



304 STAINLESS STEEL & WEBBING

S0205-JJ SERIES:
1"x10' through 1"x30'

AVAILABLE IN BLACK, BLUE, WHITE OR ORANGE WEBBING.

THE CAM BUCKLE ASSEMBLY IS AVAILABLE IN A 1" WIDTH AND MULTIPLE STOCK AND CUSTOM LENGTHS AND COLORS. IT FEATURES TWO STAINLESS STEEL "J" HOOKS AND A CAM BUCKLE FOR EASY REMOVAL OF THE WEBBING.

COVER TIE-DOWN KIT



316 STAINLESS STEEL & WEBBING

S0280-0 SERIES:
1"

TOTAL STRAP LENGTH IS DIVIDED INTO TWO STRAPS WITH A WELDED "S" HOOK ON THE END OF EACH. AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS.

RATCHET ASSEMBLY ENDLESS



304 STAINLESS STEEL & WEBBING

S0201-EN SERIES: 1"
S0203-EN SERIES: 1.5"
S0204-EN SERIES: 2"

AVAILABLE IN BLACK, BLUE, WHITE OR ORANGE WEBBING.

THE RATCHET ASSEMBLY ENDLESS IS AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS, WIDTHS AND COLORS. IT FEATURES A STAINLESS STEEL RATCHET BUCKLE FOR EASY RATCHETING CAPABILITIES. NO HARDWARE ON END OF ASSEMBLY.

OVER-CENTER ASSEMBLY WITH CLIPS



304 & 316 STAINLESS STEEL & WEBBING

S0207-0 SERIES:
1" through 2"

AVAILABLE IN BLACK OR BLUE WEBBING.

THE OVER-CENTER ASSEMBLY WITH CLIPS IS AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". IT FEATURES A STAINLESS STEEL RATCHET BUCKLE, TWO STAINLESS STEEL HARNESS CLIPS AND HIGH-QUALITY NYLON WEBBING.

WIDE RATCHET ASSEMBLY WITH CLIPS



304 & 316 STAINLESS STEEL & WEBBING

S0202-0 SERIES: 1"
S0206-0 SERIES: 1.5"
S0208-0 SERIES: 2"

AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". FEATURES A STAINLESS STEEL WIDE GRIP RATCHET BUCKLE, TWO STAINLESS STEEL HARNESS CLIPS AND HIGH-QUALITY NYLON WEBBING.

WIDE RATCHET ASSEMBLY WITH "J" HOOKS



304 STAINLESS STEEL & WEBBING

S0202-JJ SERIES: 1"
S0206-JJ SERIES: 1.5"
S0208-JJ SERIES: 2"

AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". FEATURES A STAINLESS STEEL WIDE GRIP RATCHET BUCKLE, TWO STAINLESS STEEL "J" HOOKS AND HIGH-QUALITY NYLON WEBBING.

WIDE RATCHET ASSEMBLY WITH "S" HOOKS



304 & 316 STAINLESS STEEL & WEBBING

S0202-SS SERIES: 1"
S0206-SS SERIES: 1.5"
S0208-SS SERIES: 2"

AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". FEATURES A STAINLESS STEEL WIDE GRIP RATCHET BUCKLE, TWO STAINLESS STEEL "S" HOOKS AND HIGH-QUALITY NYLON WEBBING.

WIDE RATCHET ASSEMBLY WITH FLAT HOOKS



304 STAINLESS STEEL & WEBBING

S0202-FH SERIES: 1"
S0206-FH SERIES: 1.5"
S0208-FH SERIES: 2"

AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1" TO 2". FEATURES A STAINLESS STEEL WIDE GRIP RATCHET BUCKLE, TWO STAINLESS STEEL FLAT HOOKS AND HIGH-QUALITY NYLON WEBBING.

STRAP KIT WITH BIMINI CLIP



304 STAINLESS STEEL & WEBBING

S0236-0000:
1"x48"

THIS KIT INCLUDES 48" OF 1" WEBBING WITH A BIMINI CLIP, ONE FIXED THREADING PLATE FOR ADJUSTMENT AND A WELDED "D" RING. BIMINI CLIP PART S0220-0025 AND THREADED PLATE S0215-0025.

STRAP KIT WITH SWIVEL CLIP



304 & 316 STAINLESS STEEL & WEBBING

S0236-0001:
1"x48"

THIS KIT INCLUDES 48" OF 1" WEBBING WITH A SWIVEL CLIP, ONE FIXED THREADING PLATE FOR ADJUSTMENT AND A WELDED "D" RING. SWIVEL CLIP PART S0221-0025 AND THREADED PLATE S0215-0025.

STRAP KIT WITH STAR ADJUSTER AND SWIVEL CLIP



304 & 316 STAINLESS STEEL & WEBBING

S0236-0002:
1"x48"

THIS KIT INCLUDES 48" OF 1" WEBBING WITH SWIVEL CLIP AND STAR ADJUSTER.

WEBBING ASSEMBLY WITH FLAT HOOK



304 STAINLESS STEEL & WEBBING

S0233-0 SERIES:
1"x24" through 1"x60"

OTHER WEBBING LENGTH OR WIDTH COMBINATIONS ARE AVAILABLE ON SPECIAL ORDER. WEBBING IS HIGH QUALITY NYLON.

WEBBING ASSEMBLY WITH BIMINI CLIP



304 STAINLESS STEEL & WEBBING

S0234-0004:
1"x48"

OTHER WEBBING LENGTHS ARE AVAILABLE ON SPECIAL ORDER. WEBBING IS HIGH QUALITY NYLON. BIMINI HOOKS ARE ITEM S0220-0025.

WEBBING ASSEMBLY WITH SWIVEL CLIP



304 STAINLESS STEEL & WEBBING

S0235-0004:
1"x48"

OTHER WEBBING LENGTHS ARE AVAILABLE ON SPECIAL ORDER. WEBBING IS HIGH QUALITY NYLON.

WIDE RATCHET ASSEMBLY ENDLESS



304 STAINLESS STEEL & WEBBING

S0202-EN SERIES: 1″
S0206-EN SERIES: 1.5″
S0208-EN SERIES: 2″

AVAILABLE IN MULTIPLE STOCK AND CUSTOM LENGTHS AND WEBBING WIDTHS FROM 1″ TO 2″. FEATURES A STAINLESS STEEL WIDE GRIP RATCHET BUCKLE. NO HARDWARE ON END OF ASSEMBLY.

WIDE GRIP RATCHET BUCKLE



304 STAINLESS STEEL

S0202-WG25:
1″
S0206-WG38:
1-1/2″
S0208-WG50:
2″

ACCOMMODATES WEBBING WIDTHS OF 1″, 1-1/2″ AND 2″ AND FEATURES DUAL LOCKS.

MINI OVER-CENTER BUCKLE



304 STAINLESS STEEL

S0207-0026:
1″

MOST COMPACT STAINLESS OVER-CENTER BUCKLE AVAILABLE ON THE MARKET. IDEAL FOR BOAT COVER TIE-DOWNS AND MANY OTHER USES.

DELTA OR HARNESS LINK



304 STAINLESS STEEL

S0213-0050:
2″

MATERIAL THICKNESS IS 0.20″.

WEBBING SHACKLE



316 STAINLESS STEEL

S0231-0025:
1″

PATENTED "NO SNAG" DESIGN. CAN BE USED IN W/WALL CLIP S0230-0000: PIN FITS THROUGH HOLE IN CLIP. USE W/FLAT WEB HOOK OR W/WEBBING WITH SEWN LOOP (S0232-SERIES). COMPATIBLE WITH SWIVEL PAD EYE.

RATCHET BUCKLE



304 STAINLESS STEEL

S0201-0025:
1″
HEAVY DUTY
S0203-HD38 &
S0204-HD50:
1-1/2″ through 2″

RATCHET BUCKLES HAVE DUAL LOCKS. HD MODELS ALSO FEATURE PATENTED "HANDLE DOWN" LOCK.

OVER-CENTER BUCKLE



304 STAINLESS STEEL

S0207-0025:
1″
S0207-0050:
2″

GOOD GRIP. COMES WITH THREADING DIRECTIONS. S0207-0050 OVER-CENTER BUCKLE CAN BE SURFACE MOUNTED.

CAM BUCKLE



316 STAINLESS STEEL

S0205-0025:
1″

CAM BUCKLE USED FOR LIGHT-DUTY WEBBING APPLICATIONS.

FOOTMAN'S LOOP



316 STAINLESS STEEL

S0224-0 SERIES:
1″ through 2″

CAN BE USED HORIZONTALLY OR VERTICALLY. PATENTED, "NO SNAG" DESIGN. USE FLAT HOOK S0210-0025 TO ATTACH WEBBING OR SLIP THE WEBBING WITH SEWN LOOP (S0232-SERIES) OVER THE FITTING BEFORE TIGHTENING ATTACHMENT.

FLAT WEB HOOK



304 STAINLESS STEEL

S0210-0 SERIES:
1″ through 2″

USE TO ATTACH TO TRAILER FRAME OR S0210-0025 TO FOOTMAN'S LOOP (S0224-SERIES).

DOUBLE "J" WEB HOOK



304 STAINLESS STEEL

S0211-0 SERIES:
1" through 2"

FIXED THREADING PLATE



304 STAINLESS STEEL

S0215-0 SERIES:
1" through 2"

LIGHT DUTY
S0215-L050:
2"

HIGH QUALITY THREADING PLATE MADE FROM THICK STAINLESS PLATE. S0215-L050 IS NARROW TYPE PLATE (NOT SHOWN) FOR LIGHTER DUTY.

ADJUSTABLE SLIDE



304 STAINLESS STEEL

S0216-0 SERIES:
1" through 2"

FEATURES KNURLED BAR, FREE SLIDING FROM SIDE TO SIDE INSIDE A HIGH QUALITY, WELDED RECTANGLE. SEW WEBBING ON WELDED SIDE AND USE OTHER SIDE FOR ADJUSTMENT.

STAR ADJUSTER



316 STAINLESS STEEL

S0217-0025:
1"

HIGHEST QUALITY ADJUSTER FEATURES TEETH ON BACK TO SECURELY HOLD WEBBING. ROUND RECESS WILL ACCEPT SWIVEL WEB CLIP S0221-0025. FOR READY-MADE ASSEMBLY, SEE ITEM S0237-0000-C.

"D" RING



316 STAINLESS STEEL

S0139-X SERIES:
1/8" through 5/16"

*MEETS REQUIREMENTS OF: MIL-DTL-32655 (*EXCLUDING S0139-X640).*

WELDED "S" WEB HOOK



316 STAINLESS STEEL

S0212-0 SERIES:
1" through 2"

QUALITY "S" HOOK IS WELDED TO PREVENT WEBBING FROM SLIPPING THROUGH. BULK ORDERS OF OTHER SIZES OR TYPES MAY BE PLACED ON SPECIAL ORDER.

SWIVEL WEB CLIP



316 STAINLESS STEEL

S0221-0 SERIES:
1" through 2"

"SLIMLINE" BAIL FOR WEBBING; SPECIAL TORSION SPRING GATE FOR LONGER LIFE. IDEAL FOR BIMINI TOPS AND HOLD DOWN STRAPS.

FIXED BIMINI CLIP



304 STAINLESS STEEL

S0220-0025:
1"

THIS CLIP IS IDEAL FOR BIMINI TOPS AND HOLD-DOWN STRAPS.

WALL OR CEILING CLIP



316 STAINLESS STEEL

S0230-0000:
1-3/4"

HAS SPECIAL HOLE TO ALLOW COMBINATION WITH WEBBING SHACKLE (S0231-0025). CLIP CAN ALSO BE USED WITH OTHER TIE-DOWN COMPONENTS TO SECURE LARGER OBJECTS SUCH AS HOSES, ROPES, CANOES, ETC.

WALL OR CEILING CLIP WITH CHAIN



316 STAINLESS STEEL

S0230-0001:
1-3/4"

FOR SECURING GEAR AND EQUIPMENT. FEATURES 18" LENGTH OF 1/8" LONG LINK 316 STAINLESS STEEL CHAIN. GREAT FOR HARSH ENVIRONMENTS.

TIDY STRAP



316 STAINLESS STEEL & WEBBING

S0237-0000-C:
1"x48"

ASSEMBLY UTILIZES HIGHEST QUALITY ADJUSTER, WHICH FEATURES TEETH ON BACK TO SECURELY HOLD WEBBING. ADJUSTER CLIPS INTO THE WALL & CEILING CLIP ABOVE. IDEAL FOR SHOP OR GARAGE ORGANIZATION.

STRAP-IT



WEBBING

S0239-0 SERIES:
10" through 24"

ADD A STRAP-IT WHEN A POINT OF ATTACHMENT IS NEEDED. QUICK AND EASY TO INSTALL. A SIMPLE WAY OF PROVIDING A LOOP TO CLIP ONTO, WHILE SECURING YOUR GEAR OR YOUR SAFETY.

DOUBLE JACKLINE WITH CLIP – ORANGE WEBBING



316 STAINLESS STEEL & WEBBING

C0240-0-O SERIES:
1"x35' through 1"x55'

SUNCOR'S JACKLINE KIT COMBINES THE STRENGTH OF OUR HIGH QUALITY TUBULAR WEBBING WITH THE DURABILITY OF OUR 316 SS HEAVY DUTY HARNESS CLIPS.

SINGLE JACKLINE WITH CLIP – ORANGE WEBBING



316 STAINLESS STEEL & WEBBING

C0240-0-H-O SERIES:
1"x35' through 1"x55'

SUNCOR'S JACKLINE KIT COMBINES THE STRENGTH OF OUR HIGH QUALITY TUBULAR WEBBING WITH THE DURABILITY OF OUR 316 SS HEAVY DUTY HARNESS CLIPS.

SINGLE JACKLINE WITH LOOP – ORANGE WEBBING



WEBBING

C0240-0-L-O SERIES:
1"x35' through 1"x55'

SUNCOR'S JACKLINE KIT FEATURES ORANGE NYLON TUBULAR WEBBING WITH A SEWN LOOP IN A VARIETY OF LENGTHS.

SKI TOW TIE-DOWN



316 STAINLESS STEEL & WEBBING

S0238 SERIES:
1"x7"

AVAILABLE IN BLACK, BLUE, ORANGE OR WHITE WEBBING.

DESIGNED FOR SECURING JET SKIS WITH BOW AND TRANSOM EYES TO TRAILER. INSERT THE WEBBING END THROUGH EYE PROVIDING A LOOP TO CLIP YOUR TIE-DOWNS TO.

DOUBLE JACKLINE WITH CLIP – BLUE WEBBING



316 STAINLESS STEEL & WEBBING

C0240-0-B SERIES:
1"x35' through 1"x55'

SUNCOR'S JACKLINE KIT COMBINES THE STRENGTH OF OUR HIGH QUALITY TUBULAR WEBBING WITH THE DURABILITY OF OUR 316 SS HEAVY DUTY HARNESS CLIPS.

SINGLE JACKLINE WITH CLIP – BLUE WEBBING



316 STAINLESS STEEL & WEBBING

C0240-0-H-B SERIES:
1"x35' through 1"x55'

SUNCOR'S JACKLINE KIT COMBINES THE STRENGTH OF OUR HIGH QUALITY TUBULAR WEBBING WITH THE DURABILITY OF OUR 316 SS HEAVY DUTY HARNESS CLIPS.

SINGLE JACKLINE WITH LOOP – BLUE WEBBING



WEBBING

C0240-0-L-B SERIES:
1"x35' through 1"x55'

SUNCOR'S JACKLINE KIT FEATURES BLUE NYLON TUBULAR WEBBING WITH A SEWN LOOP IN A VARIETY OF LENGTHS.

WEBBING ASSEMBLY WITH SEWN LOOP



WEBBING

S0232-0 SERIES:
1"x24" through 1"x48"

OTHER WEBBING LENGTH OR WIDTH COMBINATIONS ARE AVAILABLE ON SPECIAL ORDER.

YOKE ENDS & TOGGLES

RIGGING YOKE ENDS AND TOGGLES

Suncor Stainless manufactures rigging toggles and yoke ends made from grade 316 stainless steel for maximum corrosion resistance and durability. Rigging toggles are ideal for marine applications where a jaw turnbuckle is misaligned. Yoke ends are primarily used in tie rod assemblies as a mechanical connection point that allows pivoting.

THREADED YOKE END, UNC RIGHT HAND



316 STAINLESS STEEL

S0113-RC SERIES:
3/16" through 1"

FORGED

SOLD WITH CLEVIS PINS. UNC THREADED.

THREADED YOKE END, UNC LEFT HAND



316 STAINLESS STEEL

S0113-LC SERIES:
3/16" through 1"

FORGED

SOLD WITH CLEVIS PINS. UNC THREADED.

THREADED YOKE END, UNF RIGHT HAND



316 STAINLESS STEEL

S0113-RF SERIES:
3/16" through 1"

FORGED

SOLD WITH CLEVIS PINS. UNF THREADED.

THREADED YOKE END, UNF LEFT HAND



316 STAINLESS STEEL

S0113-LF SERIES:
3/16" through 1"

FORGED

SOLD WITH CLEVIS PINS. UNF THREADED.

THREADED YOKE END, METRIC RIGHT HAND



316 STAINLESS STEEL

S0113-RM SERIES:
5 MM through 24 MM

FORGED

SOLD WITH CLEVIS PINS. METRIC THREADED.

THREADED YOKE END, METRIC LEFT HAND



316 STAINLESS STEEL

S0113-LM SERIES:
5 MM through 24 MM

FORGED

SOLD WITH CLEVIS PINS. METRIC THREADED.

UNTHREADED YOKE END



316 STAINLESS STEEL

S0113-U SERIES:
3/16" through 1"

FORGED

SOLD WITH CLEVIS PINS. THIS ITEM IS NOT THREADED. CALL FOR SPECIAL THREADS.

TOGGLE EYE



316 STAINLESS STEEL

SHORT, LONG & CUSTOM CUT
S0320-T SERIES:
1/4" through 3/8"

THREADS ARE UNF.

WALL TOGGLE EYE



316 STAINLESS STEEL

SHORT, LONG & CUSTOM CUT
S0320-W SERIES:
1/4" through 3/8"

THREADS ARE UNF.

JAW EYE



316 STAINLESS STEEL

SHORT, LONG & CUSTOM CUT
S0320-J SERIES:
1/4" through 3/8"

THREADS ARE UNC.

RIGGING TOGGLE



316 STAINLESS STEEL

S0168-0 SERIES:
7/32" through 1/2"

INCLUDES REMOVABLE CLEVIS PIN.

RIGGING TOGGLE



316 STAINLESS STEEL

S0168-SS SERIES:
1/4" through 5/8"

INCLUDES REMOVABLE CLEVIS PIN.

RIGGING TOGGLE



CHROME ON BRONZE

S0168-CB08:
5/16"

INCLUDES REMOVABLE CLEVIS PIN.

RIGGING TOGGLE



BRONZE

S0168-BZ SERIES:
3/8" through 5/8"

FORGED

INCLUDES REMOVABLE CLEVIS PIN.

STAINLESS STEEL ELEMENTS



THERE ARE 5 PRIMARY ELEMENTS IN STAINLESS STEEL

CHROMIUM, NICKLE, MOLYBDENUM, CARBON AND IRON.

BELOW, WE REVIEW EACH ELEMENT AND WHAT THEY CONTRIBUTE TO STAINLESS STEEL.

Chromium (Cr) combines with oxygen to generate a protective oxide layer. Chromium is one of four elements that consistently align in a regular pattern when subjected to oxygen. Lack of oxygen, such as prolonged submersion will act to break down the uniform oxide layer and allow corrosives to enter and attach to the iron and carbon underneath.

Nickel (Ni) has an exceptionally low rate of oxidation, and, like chromium, is one of four elements that consistently align in a regular pattern. Nickel is less susceptible to acids and highly corrosive compounds then chromium and it has a cathode property that neutralizes the protective layer of stainless steel.

Molybdenum makes the steel more resistant to pitting and crevice corrosion in chloride-contaminated media and sea water. Molybdenum is a very tough element and has the sixth highest melting point of any element. Molybdenum acts by creating a tight weave or lattice with the chromium which creates a tighter seal against elements penetrating the oxide layer and prevents iron atoms from raising to the metal's surface under heat.

Iron (Fe) typically accounts for 64 to 74% of stainless steel.

Carbon (C) is usually below 0.08% of stainless steel, making stainless steel a low carbon product. Low carbon metals are softer and wear easier, but the higher the carbon content, the more susceptible a metal is to corrosion.

RAILING & BIMINI

STAINLESS STEEL RAILING AND BIMINI HARDWARE

Suncor Stainless offers essential fittings to completely overhaul your bimini setup. This collection of bases, elbows, tees and corner fittings is offered in a variety of configurations and angle degrees. All hardware is precision cast using 316 stainless steel and sized to accommodate 7/8" or 1" tubular bimini railing. Components feature a mirror polished finish for maximum corrosion resistance.

ROUND RAIL BASE – 30 DEGREE ANGLE



316 STAINLESS STEEL

S3650-0300 & S3650-0301:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

ROUND RAIL BASE – 45 DEGREE ANGLE



316 STAINLESS STEEL

S3650-0450 & S3650-0451:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

ROUND RAIL BASE – 60 DEGREE ANGLE




316 STAINLESS STEEL

S3650-0600 & S3650-0601:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

ROUND RAIL BASE – 90 DEGREE ANGLE



316 STAINLESS STEEL

S3650-0900 & S3650-0901:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

RECTANGULAR BASE – 30 DEGREE ANGLE



316 STAINLESS STEEL

S3651-0300 & S3651-0301:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

RECTANGULAR BASE – 45 DEGREE ANGLE




316 STAINLESS STEEL

S3651-0450 & S3651-0451:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

RECTANGULAR BASE – 60 DEGREE ANGLE



316 STAINLESS STEEL

S3651-0600 & S3651-0601:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

RECTANGULAR BASE – 90 DEGREE ANGLE



316 STAINLESS STEEL

S3651-0900 & S3651-0901:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

RECTANGULAR BASE – 90 DEGREE ANGLE, 2 HOLE



316 STAINLESS STEEL

S3652-0 SERIES:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

3-WAY RAIL CORNER – 90 DEGREE ANGLE



316 STAINLESS STEEL

S3666-0 SERIES:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

TEE RAIL, UNIVERSAL – 60 DEGREE ANGLE



316 STAINLESS STEEL

S3660-0600 & S3660-0601:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.
THIS PART CAN BE USED IN RIGHT AND LEFT HAND APPLICATIONS.

LIFELINE STANCHION



316 STAINLESS STEEL

S3609 SERIES:
24" through 36"
and custom sizes

BULLET CAP IS INCLUDED IN THE LIFELINE STANCHION ASSEMBLY.

STANCHION BASE



316 STAINLESS STEEL

S3610-0000:
1"

HEAVY DUTY BASE, PRECISION CAST IN ONE PIECE, NO WELDS.
BASE ANGLE IS 3 DEGREES TO ALLOW FOR SLOPING DECK.

RAIL ELBOW – 90 DEGREE ANGLE



316 STAINLESS STEEL

S3665-0 SERIES:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

BOW FORMER



316 STAINLESS STEEL

110 DEGREE ANGLE
S3663-0000:
7/8"

125 DEGREE ANGLE
S3663-0001:
1"

COMES WITH 4 SET SCREWS IN UNDERSIDE;
OTHER ANGLES ARE AVAILABLE FOR BULK ORDERS.

TEE RAIL, UNIVERSAL – 90 DEGREE ANGLE



316 STAINLESS STEEL

S3660-0900 & S3660-0901:
7/8" and 1"

SOLD INDIVIDUALLY, WITH SET SCREWS. USE 1/8" ALLEN KEY.

STANCHION BRACE



316 STAINLESS STEEL

S3610-0600 &
S3610-0750:
1"

USE TO BRACE STANCHIONS NEXT TO GATES; SLIDE ALLOWS
SELECTION OF HEIGHT FOR ATTACHING TO STANCHION.

BULLET CAP



316 STAINLESS STEEL

S3608-0025:
1"

BULLET CAP IS INCLUDED IN THE LIFELINE STANCHION ASSEMBLY.

BOTTOM MOUNT




316 STAINLESS STEEL

S3675-0 SERIES:
7/8" and 1"

HEAVY DUTY BOTTOM MOUNT FOR HANDRAILS WITHOUT WELDS. CLEAN TOP AS MOUNTING IS FROM BELOW.

FORWARD END RAIL – 120 DEGREE ANGLE



316 STAINLESS STEEL

S3670-1 SERIES:
7/8" and 1"


AFT END RAIL – 60 DEGREE ANGLE



316 STAINLESS STEEL

S3671-0 SERIES:
7/8" and 1"

CENTER RAIL – 60 DEGREE ANGLE



316 STAINLESS STEEL

S3672-0 SERIES:
7/8" and 1"

RAIL STANCHION END



316 STAINLESS STEEL

S3673-0600:
7/8"

RAIL STANCHION PERMITS HIGHER CLEARANCE BELOW RAIL.

RAIL STANCHION CENTER



316 STAINLESS STEEL

S3673-1600:
7/8"

RAIL STANCHION PERMITS HIGHER CLEARANCE BELOW RAIL.

END MOUNT IN – 5 DEGREE



316 STAINLESS STEEL

S3677-0055:
7/8"

ALLOWS RAIL TO GO INSIDE AND BE SECURED WITH SET SCREW.

END MOUNT OUT – 7 DEGREE



316 STAINLESS STEEL

S3676-0055:
3/4"

ACCEPTS RAIL OUTSIDE FOR CONSISTENT LOOK.

TOP CAP



316 STAINLESS STEEL

TOP CAP
S3680-0000 & S3680-0001:
7/8" and 1"

HEAVY TOP CAP
S3680-1001:
1"

TOP SLIDE



316 STAINLESS STEEL

TOP SLIDE
S3681-0 SERIES:
7/8" and 1"

HEAVY TOP SLIDE
S3681-1001:
1"

TOP CAP AND SLIDE WILL FIT TOGETHER.

MULTI-DIRECTIONAL TOP CAP



316 STAINLESS STEEL

S3684-0 SERIES:
7/8" and 1"

ALLOWS 360 DEGREE MOVEMENT IN HORIZONTAL PLANE AND 180 DEGREES IN VERTICAL PLANE.

HINGED TOP SLIDE



316 STAINLESS STEEL

S3683-0 SERIES:
7/8" and 1"

SLEEK DESIGN WITH INCORPORATED HINGE (NOT 2 PARTS) WHICH PREVENTS LOSS DURING INSTALLATION; ALLOWS EASY INSTALLATION OF A TOP SLIDE ON ANY EXISTING BIMINI TOP.

DECK RAIL HINGE



316 STAINLESS STEEL

S3687-0 SERIES:
7/8" and 1"

DESIGNED TO MEET THE DESIRED ANGLE OF BIMINI RAIL. FASTENED WITH A SCREW AND SUPPLIED WITH SET SCREWS TO SECURE RAILS.

DECK RAIL HINGE W/PIN



316 STAINLESS STEEL

S3686-0 SERIES:
7/8" and 1"

DESIGNED TO MEET THE DESIRED ANGLE OF BIMINI RAIL. SECURED WITH REMOVABLE RETAINING PIN AND SUPPLIED WITH SET SCREWS TO SECURE RAILS.

90 DEGREE ANGLE DECK HINGES



316 STAINLESS STEEL

90 DEGREE ANGLE DECK HINGE
S3682-2000:
2-1/4"

90 DEGREE ANGLE DECK HINGE, WITH REMOVABLE PIN
S3682-5000:
2-1/4"

CONCAVE DECK HINGES



316 STAINLESS STEEL

CONCAVE DECK HINGE
S3682-3000:
2-1/4"

CONCAVE DECK HINGE, WITH REMOVABLE QUICK PIN
S3682-3001:
2-1/4"

SIDE DECK HINGES



316 STAINLESS STEEL

SIDE DECK HINGE
S3682-0000:
2"

HEAVY SIDE DECK HINGE
S3682-1000:
2-13/16"

80 DEGREE ANGLE DECK HINGES



316 STAINLESS STEEL

80 DEGREE ANGLE DECK HINGE, SCREWED
S3682-4000:
2-1/4"

80 DEGREE ANGLE DECK HINGE, DRILLED
S3682-4001:
2-1/4"

FLAT END CAP



304 STAINLESS STEEL

S3679-0 SERIES:
7/8" and 1"

CLOSES TUBE ENDS WITHOUT FASTENER.

REMOVABLE PIN SETS



STAINLESS STEEL

REMOVABLE PIN WITH RING
S3685-0001:
1/4"

LANYARD WITH PIN
S3685-0000:
1/4"

DECK HARDWARE

STAINLESS STEEL DECK HARDWARE

Suncor Stainless sets the standard for high-quality stainless steel deck hardware and marine components. Built for harsh marine conditions, our products combine proven materials, expert manufacturing, and dependable performance. With an extensive offering that includes cleats, chocks, steering products, rod holders, hatches, deck pipes, hawse pipes, antenna mounts, hose deck fills, and more, Suncor provides the expertise and product depth the marine industry relies on.

LIFT EYE CLEAT



316 STAINLESS STEEL

S3250-0000:
7″

USES 2 #10 FASTENERS. THREADS ARE 5/8″ - 11 UNC.

HERRESHOFF CLEAT



316 STAINLESS STEEL

S3105-0000 - S3112-0000:
4″ through 12″

BACKING PLATES FOR HERRESHOFF CLEATS ARE AVAILABLE.

BLUE WATER CLEAT



316 STAINLESS STEEL

S3138-0000 - S3145-0000:
8″ through 15″

BACKING PLATES FOR BLUE WATER CLEATS ARE AVAILABLE.

TRIMLINE CLEATS



316 STAINLESS STEEL

S3204-0000- S3208-0000:
4″ through 8″

BACKING PLATES FOR TRIMLINE CLEATS ARE AVAILABLE.

FLAGPOLE CLEAT



304 STAINLESS STEEL

S3103-0000 and **S3104-0000:**
2-1/2″ and 4-1/2″

BOW CHOCKS



316 STAINLESS STEEL

S3304-0000 and **S3306-0000:**
5″ and 6″

SOLD AS A PAIR: ONE PORT, ONE STARBOARD. EDGES ARE POLISHED AND ROUNDED TO PREVENT CHAFE OF LINES. PROFILES MAY VARY.

SKENE CHOCKS



316 STAINLESS STEEL

S3340-0000 - S3390-0000:
4-1/2″ through 9″

SOLD AS A PAIR: ONE PORT, ONE STARBOARD. EDGES ARE POLISHED AND ROUNDED TO PREVENT CHAFE OF LINES.

STRAIGHT CHOCK



316 STAINLESS STEEL

S3405-0000 and **S3406-0000:**
5″ and 6″

SOLD SINGLY. EDGES ARE POLISHED AND ROUNDED TO PREVENT CHAFE OF LINES.

SKI TOW RING



316 STAINLESS STEEL

S3588-0 SERIES:
2-1/2" and 3"

NUTS AND WASHERS ARE INCLUDED.

HEAVY DUTY TOP ROD HOLDER



316 STAINLESS STEEL

S3611-0000:
4-3/8"

HEAVY DUTY PRECISION CAST HEAD WITH MIRROR FINISH. END OF TUBE IS MACHINED AND DEBURRED.

ROD HOLDER LINERS



RUBBER

WHITE LINER REPLACEMENT S3611-1000:
2"

BLACK LINER REPLACEMENT WITH CAP S3611-1001:
2"

DESIGNED TO FIT STANDARD 2" ROD HOLDERS.

FAIRLEAD & GASKET



316 STAINLESS STEEL

S3730-0 SERIES:
Up to 5/16" through Up to 5/8"

MADE FROM EXTREMELY CORROSION RESISTANT MARINE GRADE 316 STAINLESS STEEL. DURABLE GASKET INCLUDED. FASTENERS NOT INCLUDED.

ACCESS HATCH AND FRAME – CONVEX



316 STAINLESS STEEL

S3812-0150:
6"

FEATURING LOW PROFILE, RUBBER GASKET FOR WEATHER TIGHT SEAL AND NON-SLIP NON-SKID SURFACE TOP. USE VERTICALLY OR HORIZONTALLY. REMOVABLE COVER.

REMOVABLE ROD HOLDER



304 STAINLESS STEEL

S3612-0000:
4"

SET INCLUDES ROD HOLDER AND MOUNTING PLATE. IDEAL FOR RETROFITS OR WHERE REMOVAL OF ROD HOLDER IS DESIRABLE.

HEAVY DUTY TOP ROD HOLDER WITH CAP



316 STAINLESS STEEL

S3611-0001:
4-3/8"

HEAVY DUTY PRECISION CAST HEAD WITH MIRROR FINISH. END OF TUBE IS MACHINED AND DEBURRED.

HEAVY DUTY FOLDING STEP



316 STAINLESS STEEL

S3630-0000:
4-5/8"

USE WHERE TEMPORARY STEP IS REQUIRED. FOLDS UP FLAT WHEN NOT IN USE AND HOLDS EITHER POSITION BY USE OF A LEAF SPRING.

WINCH HANDLE HOLDER



316 STAINLESS STEEL

S3520-0001:
0.71"

FEATURING A SIMPLE TWO FASTENER INSTALLATION, THIS WINCH HANDLE HOLDER CAN BE EASILIY PLACED WHERE IT WILL BE MOST USEFUL.

ACCESS HATCH AND FRAME – FLUSH



316 STAINLESS STEEL

S3814-0150:
6"

FLUSH MOUNT OR RECESSED. THREADED, ENTIRELY REMOVABLE COVER. COMES WITH ACCESS KEY. LOW PROFILE, RUBBER GASKET FOR A WEATHERTIGHT SEAL.

HAWSE PIPE



316 STAINLESS STEEL

OVAL
S3806-0001:
5-1/2″

SQUARE
S3806-0000:
6″

TRIANGLE
S3807-0000:
7-7/8″

USE #10 FASTENERS.

CHAIN AND DECK PIPE



316 STAINLESS STEEL

S3810-0000:
5-1/2″

USE #10 FASTENERS. COVER SLIDES TO OPEN AND IS SPRING LOADED TO CLOSE AUTOMATICALLY.

ROPE DECK PIPE WITH HINGE



CHROME PLATED BRASS

C3808-0002:
1-1/2″

PRECISION CAST. USE 3/16″ SCREWS. HINGED TOP FOR EASY ACCESS.

ROPE DECK PIPE WITH CHAIN



CHROME PLATED BRASS

C3808-0001:
1-3/4″

PRECISION CAST. USE 3/16″ SCREWS. SAFETY CHAIN ATTACHED SO TOP IS NOT LOST.

ANTENNA RAIL MOUNT



316 STAINLESS STEEL

S3625-0000:
#1

HEAVY DUTY ANTENNA RATCHET MOUNT WITH ALL COMPONENTS PRECISION CAST.

ANTENNA RATCHET MOUNT



316 STAINLESS STEEL

S3620-0000 & S3621-0000:
4-1/2″ and 6″

HEAVY DUTY ANTENNA RATCHET MOUNT WITH ALL COMPONENTS PRECISION CAST.

MULTI-TASK DECK KEY



304 STAINLESS STEEL

S3925-0000:
2.75″

DECK KEY COMES WITH COLOR LANYARD. FITS ALL DECK PLATE CAPS AND COMES WITH BUILT-IN BOTTLE OPENER, SCREWDRIVER, SHACKLE KEY AND #6, #10, 1/4″ AND 3/8″ HEX DRIVES.

HOSE DECK FILLS



316 STAINLESS STEEL

GAS, DIESEL, WATER OR WASTE
S3911-0000 - S3922-0000:
1-1/2″ through 2″

EACH DECK FILL SET INCLUDES BODY, CHAIN, CAP AND KEY EXCEPT THE WASTE SET WHICH DOES NOT INCLUDE CHAIN. REPLACEMENT CAP (S3920-0000) INCLUDES CHAIN.

THRU-HULL HOSE CONNECT



316 STAINLESS STEEL

S3815-0 SERIES:
3/4″ through 2″

EACH SET CONTAINS THRU-HULL AND WASHER.

GAS FILL SPLASH GUARD



316 STAINLESS STEEL

S3915-0000:
1-1/2″

ADDED FEATURE OF A "SPLASH GUARD" TO SAFEGUARD AGAINST FUEL SPRAY. SET INCLUDES BODY, CHAIN, AND CAP.

SUNCOR STAINLESS, INC.

ANCHORS

STAINLESS STEEL ANCHORS

Suncor Stainless manufactures stainless steel boat anchors and stainless steel anchor swivels for all your marine needs. Our stainless steel marine anchors and anchor swivels will meet and exceed your expectations. If you need a stainless steel anchor for you powerboat, sailboat or kayak, Suncor Stainless has the solution!

HOOK ANCHOR



316 STAINLESS STEEL

S7601-0000 - S7603-0000:
1 lb. through 4 lb.

HOOK ANCHOR FEATURES 4 FIXED PRONGS AND A ROUND RING FOR EASY ATTACHMENT TO CHAIN OR ROPE. IT IS IDEAL FOR LIGHT DUTY APPLICATIONS.

FOLDING GRAPNEL ANCHOR



CAST IRON GALVANIZED

G8001-MKII - G8003-MKII (BLACK, BLUE, GREEN OR RED):
1.5 lb. through 3.5 lb.

ANCHORS INCLUDE ONE GALVANIZED SHACKLE (G8001 SERIES ONLY), ONE STAINLESS STEEL SPRING CLIP, 38' OF NYLON ROPE SPLICED TO IT AND ONE IN-LINE BUOY.



UNIVERSAL ANCHOR SWIVEL



17-4 PH STAINLESS STEEL

S0190-X SERIES:
1/4" - 5/16" through 3/8" - 1/2"

HEAVY DUTY ANCHOR RODE SWIVEL. SLEEK DESIGN WITH SOLID SCREW PINS. SWIVEL SPINS 360 DEGREES. EQUIPPED WITH SOLID BRONZE THRUST WASHER. USE S0190-RP SERIES REPLACEMENT PINS.

USCG CHAIN STOPPER



316 STAINLESS STEEL

S0180-0300:
12"

CAN BE USED ON 5/8" AND 3/4" CHAIN. POLISH IS MIRROR FINISH. SET INCLUDES STAINLESS TOGGLE SAFETY PIN WITH CHAIN. USE ANY SUITABLE 3/4" SIZE TURNBUCKLE FOR TENSIONING CHAIN.

FOLDING GRAPNEL ANCHOR



CAST IRON GALVANIZED

G8001-MKII - G8012-MKII:
1.5 lb. through 12 lb.

ANCHORS INCLUDE ONE SHACKLE. GOOD FOR SMALL CRAFT IN ROCKS AND MUDDY BOTTOMS.

SNUBBER HOOK



316 STAINLESS STEEL

S0191-0 SERIES:
1/4" through 3/8"

DESIGNED TO FIT STANDARD ANCHOR CHAIN STYLES. DEEP CHANNEL PREVENTS CHAIN FROM FALLING OFF, BUT ALLOWS FOR EASY REMOVAL.

360 DEGREE ANCHOR SWIVEL



17-4 PH STAINLESS STEEL

S0190-0 SERIES:
1/4" - 5/16" through 3/8" - 1/2"

HEAVY DUTY ANCHOR RODE SWIVEL. SLEEK DESIGN WITH SOLID SCREW PINS. SWIVEL SPINS 360 DEGREES. EQUIPPED WITH SOLID BRONZE THRUST WASHER. USE S0190-RP SERIES REPLACEMENT PINS.

FREQUENTLY PURCHASED WITH:



CHAIN PACK
C0132-0-CH SERIES



ANCHOR SHACKLE
S0116-FS SERIES

SUNCOR STAINLESS, INC.

TRAILER PARTS & ACCS.

STAINLESS STEEL BOAT TRAILER PARTS AND ACCESSORIES

Suncor Stainless manufactures an extensive line of stainless steel boat trailer parts including trailer locks, trailer latches, trailer hitches, trailer hitch locks and trailer U-bolts.

HITCH BALL



304 STAINLESS STEEL

C0260 SERIES:
1-7/8" x 3/4" through 2-5/16" x 1"

FORGED

TWO FLATS AT BASE ALLOW EASY HOLDING DURING INSTALLATION. TORQUE TO 160 FT LB MIN. TOWING CAPACITY AND SIZE ARE PERMANENTLY MARKED ON TOP. SOLD WITH LOCK WASHER AND NUT IN CLAMSHELL PACK.

TRAILER PIN



304 STAINLESS STEEL

C0267-0000:
5/8"

PIN DESIGNED FOR SQUARE RECEIVER HITCH, INCLUDES RETAINING PIN. HEAVY DUTY CONSTRUCTION. NON-CORROSIVE STAINLESS STEEL, ASSURES YEARS OF SERVICE AND DURABILITY.

TRAILER WINCH



304/410 STAINLESS STEEL

C0270-0001:
1,200 lbs. WLL

RATCHET LEVER CAN BE SET TO FORWARD, NEUTRAL OR REVERSE.

WEBBING ASSEMBLY WITH HOOK



316 STAINLESS STEEL

C0270-2050:
20'

THIS ASSEMBLY IS OFFERED AS A REPLACEMENT OR AN UPGRADE FOR WINCHES USING WEBBING AND HOOK COMBINATIONS.

TRAILER TONGUE



304 STAINLESS STEEL

C0266-0000:
2"

SPACER & WASHER FOR 3/4" SHANK: C0266-0001

FORGED

THIS HEAVY DUTY TRAILER TONGUE IS DESIGNED TO FIT INTO A 2" RECEIVER AND IS DRILLED TO ACCEPT A 1" SHANK HITCH BALL.

TRAILER COUPLER



304 STAINLESS STEEL

C0265 SERIES:
1-7/8" x 2" through 2" x 3"

LATCHING MECHANISM FEATURES HEAVY DUTY SAFETY LATCH TO PREVENT ACCIDENTAL UNCOUPLING AND A PADLOCK HOLE WITH PROVIDED "QUICK PIN" FOR TRAILER SECURITY. USES 1/2" X 3" BOLTS.

TRAILER WINCH WITH STRAP AND HOOK



304/410 STAINLESS STEEL

C0270-2001:
1,200 lbs. WLL

ASSEMBLY IS WINCH, AN INSTALLED 20' WEB STRAP AND A FORGED EYE HOOK. REPLACEMENT STRAPS SOLD SEPARATELY: S0270-2050.

SPLIT ROLLER BRACKET



304 STAINLESS STEEL

S0279-0001:
5/8"

SPLIT ROLLER BRACKETS ALLOW FOR ADJUSTMENT TO ANY WIDTH. ROLLER PIN HOLE IS 5/8". SOLD AS MATCHED SET, LEFT AND RIGHT.

TRAILER U-BOLT



304 STAINLESS STEEL

S0276-1 SERIES:
1/2" x 3" through 1/2" x 6"

STAINLESS TRAILER U-BOLTS ARE INTENDED TO REPLACE OR UPGRADE ORIGINAL TRAILER PARTS. EACH SET INCLUDES 2 NUTS AND 2 WASHERS.

ROLLER SHAFT PALL NUTS, 2 PACK



304 STAINLESS STEEL

S0278-0013-2 & S0278-0016-2:
1/2" and 5/8"

SOLD IN PAIRS.

ROLLER SHAFTS




304 STAINLESS STEEL

S0278-0 SERIES:
1/4" x 3" through 1" x 7"

DRILLED AT BOTH ENDS TO ACCEPT PROVIDED 1/8" COTTER PINS OR USE WITH PALL NUTS.

SUNCOR® Stainless

VIEW OUR WEBSITE FOR FULL PRODUCT INFORMATION, SPECS., AND MORE!



WWW.SUNCORSTAINLESS.COM

TRAILER SAFETY CHECKLIST

1. The trailer should look square/straight.
2. The coupler securely engages your hitch. The coupler and hitch ball must be rated for the same size. The size should be imprinted on both the ball and the hitch.
3. Make sure that safety chains are safely secured to the trailer and tow vehicle in a criss-cross fashion under the tongue.
4. Confirm that the jack is fully cranked up (and parallel to the tongue if it is a swivel jack).
5. Make sure that the boat is securely tied down with tie-down straps. Your winch strap is not a tie-down strap. A winch controls your boat in a horizontal direction. Tie-downs control your boat in the vertical direction. You must have bow eye and transom tie-down straps securely attached whenever the trailer is in use.
6. Ensure that all fasteners and bolts are properly tightened. Pay particular attention to the lug nuts.
7. Properly inflate all tires (read the tire sidewall to determine the correct tire pressure required). This rating will be different than your tow vehicle. Also, check for tire wear, cracks, bubbles or foreign objects embedded in the tire.
8. Confirm that the brake lights and other trailer lights are working.
9. If the trailer is equipped with brakes, make sure they are functioning by lightly testing them before getting on a major road.
10. If the trailer is equipped with brakes, connect the breakaway cable (located on top of actuator) to the tow vehicle.

OTHER ITEMS RELATED TO TRAILER PARTS & ACCESSORIES


PG. 63

TIE DOWNS & HARDWARE


PG. 17

EYE BOLTS


PG. 22

TIE-DOWN RINGS


PG. 27


LASHING RINGS

LIGHTING & ELECTRICAL

STAINLESS STEEL LIGHTING AND ELECTRICAL HARDWARE

Suncor Stainless manufactures a complete line of low voltage LED lighting options that can be utilized in a variety of ways, including indoor, outdoor and underwater applications. It is ideal for practical lighting solutions required in the marine, architectural and horticultural environments. We offer a wide variety of light bars, surface mount lights, and rail lights to suit all your deck lighting needs.

MICRO STAR™ LED LIGHT



HOUSING: 316 STAINLESS STEEL

12 VOLT S0801-0 SERIES:
1/4" in White, Blue, Green, Red & Yellow

24 VOLT S0802-0 SERIES:
1/4" in White, Red & Yellow

USE DC TRANSFORMER ONLY

SMALLEST SELF CONTAINED LED ON THE MARKET, ONLY NEEDS 1/4" BORE FOR HOUSING OR 3/8" IF USED WITH GROMMET. MICRO STAR™ SITS FLUSH IN RECESSED AREA. WATERPROOF.

TRI STAR LED LIGHT



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT S0803-0000:
1/2"

12 VOLT BLUE LIGHT S0803-000B:
1/2"

12 VOLT RED LIGHT S0803-000R:
1/2"

VERY COMPACT SELF CONTAINED UNIT WITH 3 LEDS. LARGE ENOUGH TO USE IN LANDSCAPE BETWEEN PLANTS, ROCKS OR PAVING. WATERPROOF TO 10 FEET.

TRI STAR LED LIGHT BALL



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT S0803-2000:
1-1/2"

12 VOLT RED LIGHT S0803-200R:
1-1/2"

SELF CONTAINED BALL HOUSING HAS 3 LEDS AND IS THREADED. COMES WITH NUT. IT HAS ALL THE FEATURES OF THE TRI STAR: WATERPROOF TO 10 FT; MOST EFFICIENT IN POWER CONSUMPTION 20 MA@13 VDC (TYPICAL).

TRI STAR LED LIGHT BACK MOUNT



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT S0803-6000:
3/4"

12 VOLT RED LIGHT S0803-600R:
3/4"

LOW PROFILE AND SMALL FACE VERSION OF THE TRI STAR WITH ALL ITS FEATURES. CAN BE MOUNTED THROUGH MATERIAL UP TO 3/4" THICK AND SECURED FROM THE BACK WITH A NUT.

MICRO STAR™ LED LIGHT WITH PUSH CONNECTOR



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT S0801-PC01:
0.38"

USE DC TRANSFORMER ONLY

STANDARD GROMMET INCLUDED S0801-PC01 ACCOMMODATES MOUNTING INTO MATERIAL UP TO 1/16" THICK. S0801-GR0701–0707 GROMMET SERIES ALLOWS MOUNTING INTO MATERIAL UP TO 1/4" THICK.

TRI STAR LED LIGHT WITH STALK




HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT
S0803-1040 - S0803-1120:
1/2" x 4" through 1/2" x 12"

12 VOLT RED LIGHT
S0803-104R - S0803-112R:
1/2" x 4" through 1/2" x 12"

TRI STAR IS ATTACHED TO FLEXIBLE STALK. MOST EFFICIENT IN POWER CONSUMPTION 20 MA @13 VDC (TYPICAL), PLUS THE ADDITION OF DIRECTING LIGHT WHERE NEEDED.

TRI STAR LED LIGHT FACEMOUNT



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT S0803-5000:
1-1/2"

12 VOLT RED LIGHT S0803-500R:
1-1/2"

VERY LOW PROFILE VERSION OF TRI STAR WITH ALL ITS FEATURES. PROTRUDES ONLY 1/16" AND CAN BE MOUNTED FROM FRONT USING COUNTERSUNK SCREWS FOR EASY REMOVAL OR RIVETS FOR ADDED SECURITY.

TRI STAR LED LIGHT BULKHEAD MOUNT



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE LIGHT S0803-7000:
3/4"

12 VOLT RED LIGHT S0803-700R:
3/4"

SELF CONTAINED HEAVY DUTY THREADED HOUSING WITH ALL FEATURES OF TRI STAR. IT CAN BE MOUNTED THROUGH MATERIAL UP TO 3/4" THICK AND SECURED FROM BACK WITH THE NUT.

9 STAR CLUSTER LED LIGHT



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE, RED & YELLOW LIGHT
S0809-0 SERIES:
1″

24 VOLT WHITE & YELLOW LIGHT
S0809-0 SERIES:
1″

SUNCOR'S BRIGHTEST STAR: LIGHT OUTPUT IS 9X THE MICRO STAR™. SELF CONTAINED HOUSING WITH 9 LED. WATERPROOF TO 10 FEET, POWER CONSUMPTION 60 MA @13 VDC (TYPICAL).

9 STAR CLUSTER LED LIGHT WITH STALK



HOUSING: 316 STAINLESS STEEL

12 VOLT WHITE, RED & YELLOW LIGHT
S0809-1 SERIES:
1″ x 4″ through 1″ x 12″

SELF CONTAINED HOUSING WITH 9 LED. FLEXIBLE STALK IS EITHER 4″,8″ OR 12″ LONG. WATERPROOF TO 10 FEET, POWER CONSUMPTION 60 MA @13 VDC (TYPICAL).

MICRO STAR™ LED LIGHT BAR



HOUSING: ALUMINUM

S0825-0018 - S0825-0042:
18″ through 42″ in Black, Bronze, Metallic Silver and White

USE DC TRANSFORMER ONLY

IDEAL FOR MOUNTING TO UNDER SIDE OF HANDRAILS FOR SURFACE ILLUMINATION. USE WITH LOW VOLTAGE TRANSFORMER (MICRO STAR™ TRANSFORMER) AND WIRING. #4 FASTENERS INCLUDED. USE WIRING HARNESS GROMMET S0825-GR SERIES.

MICRO STAR™ TRANSFORMER



WATER RESISTANT CONSTRUCTION

DC TRANSFORMER S0832-0005:
5 AMP

COMPRISED OF HEAVY-DUTY WATER RESISTANT MATERIAL. USE WITH MICRO STAR™ LED LIGHTING. FEATURES 6 FT. POWER CORD AND 10 FT. CONNECTOR LEAD.

MICRO STAR™ TRANSFORMER WIRING HARNESS



S0825-TW560:
64″

USE DC TRANSFORMER ONLY

FOR USE WITH MICRO STAR™ TRANSFORMER. FEATURES SCREW CONNECTION (FEMALE). REQUIRES SOLDERING OR CRIMPING.

MICRO STAR™ JUMPER



S0825-JMPR-SC1:
12″

USE DC TRANSFORMER ONLY

FEATURES MALE AND FEMALE SCREW CONNECTIONS. USE TO PASS THROUGH POSTS AND CONNECT TO WIRE HARNESSES AND MICRO STAR™ LED LIGHTS.

MICRO STAR™ EXTENSION



PUSH OR SCREW CONNECTION

S0825-EX SERIES:
60″ through 300″

USE DC TRANSFORMER ONLY

FEATURES MALE AND FEMALE SCREW OR PUSH CONNECTIONS. USE TO CONNECT WIRE HARNESSES AND MICRO STAR™ LED LIGHTS.

MICRO STAR™ EXTENSION WIRING



PUSH OR SCREW CONNECTION

S0825-J SERIES:
8″ through 13″

USE DC TRANSFORMER ONLY

FEATURES MALE AND FEMALE SCREW OR PUSH CONNECTIONS. EXTENSION WIRE FOR CUSTOM LENGTHS AND WHERE JUMPERS WON'T FIT THROUGH POST HOLES. SOLDERING OR CRIMPING REQUIRED.

MICRO STAR™ 3-WAY BRANCH CONNECTOR – PUSH CONNECTION



S0825-3000-PT:
12″

USE DC TRANSFORMER ONLY

FEATURES MALE AND FEMALE PUSH CONNECTIONS. USED TO CONNECT MULTIPLE WIRING HARNESSES AND MICRO STAR™ LED LIGHTS.

MICRO STAR™ 3-WAY BRANCH CONNECTOR – SCREW CONNECTION



S0825-3000-SC:
12″

USE DC TRANSFORMER ONLY

FEATURES MALE AND FEMALE SCREW CONNECTIONS. USED TO CONNECT MULTIPLE WIRING HARNESSES AND MICRO STAR™ LED LIGHTS.

SCREW-IN COUPLING



316 STAINLESS STEEL

S0851-0 SERIES:
1/2" through 1"

FOR USE WITH FLEXIBLE CONDUIT.

SCREW-IN CONNECTOR



316 STAINLESS STEEL

S0853-0 SERIES:
3/8" through 1-1/4"

FOR USE WITH FLEXIBLE CONDUIT.

STRAIGHT CONNECTOR



316 STAINLESS STEEL

S0852-0 SERIES:
3/8" through 1-1/4"

FOR USE WITH FLEXIBLE CONDUIT.

ELBOW CONNECTOR



316 STAINLESS STEEL

S0854-0 SERIES:
3/8" through 1-1/4"

FOR USE WITH FLEXIBLE CONDUIT.

FREQUENTLY ASKED QUESTIONS

ORDERING & SUPPORT

HOW CAN I REQUEST A QUOTE FOR SUNCOR PRODUCTS?

Quotes can be requested through the "Request a Quote" feature on Suncor's website or by contacting their sales team directly.

WHERE CAN I FIND A DISTRIBUTOR FOR SUNCOR PRODUCTS?

Suncor sells through a network of distributors. Interested customers can fill out a simple form on Suncor's website to be connected with a distributor.

WHAT WARRANTY DOES SUNCOR PROVIDE FOR ITS PRODUCTS?

Warranty information is available on Suncor's website, detailing coverage and terms for their stainless steel hardware products.

HOW CAN I CONTACT SUNCOR FOR TECHNICAL SUPPORT?

Technical support can be reached via phone at (800) 394-2222 or by emailing sales@suncorstainless.com.

CUSTOMIZATION & SERVICES

DOES SUNCOR OFFER CUSTOM STAINLESS STEEL MANUFACTURING?

Yes, Suncor provides custom manufacturing services, including chain assemblies, threading, swaging, and more, tailored to specific requirements.

ARE THERE TESTING SERVICES AVAILABLE FOR CUSTOM PRODUCTS?

Suncor offers various testing services, including strength testing, proof loading, corrosion resistance testing, and quality assurance, to ensure product reliability.

CAN SUNCOR PROVIDE RETAIL PACKAGING FOR CUSTOM PRODUCTS?

Yes, retail packaging is among the value-added services offered by Suncor for custom-manufactured products.

ARE THERE MINIMUM ORDER QUANTITIES FOR CUSTOM MANUFACTURING?

Minimum order requirements depend on the product and customization level. Suncor can provide details based on individual project needs.

TOOLS & CLEANING

TOOLS AND CLEANING PRODUCTS

Suncor Stainless offers a complete line of stainless steel tools and cleaning products. Tools include a complete line of swagers, wire, bolt and chain cutters and rivet nut installation tools. These tools help install stainless steel hardware quickly and easily. Suncor's cleaning products and supplies are used to keep stainless steel hardware looking good and working properly.

HAND SWAGER



316 STAINLESS STEEL

E0113-0 SERIES:
14" through 30"

FORGED

FOR USE ON ALUMINUM, COPPER, AND ZINC PLATED COPPER OVAL AND STOP SLEEVES ONLY. SWAGERS HAVE WIRE CUTTER BUILT-IN (EXCLUDING E0113-0700).

HAND SWAGER



FOR USE WITH HAND SWAGE STUD SERIES ONLY

E0113-H600:
24"

MAKE HAND SWAGING QUICK AND EASY USING SUNCOR'S HAND SWAGER. SWAGES 1/8", 5/32" AND 3/16". HAND SWAGER CRIMPS THE HAND SWAGE STUDS ONTO WIRE ROPE.

BENCH SWAGER



316 STAINLESS STEEL

E0115-0600:
21"

FORGED

MAKE HAND SWAGING QUICK AND EASY USING SUNCOR'S BENCH SWAGER. BENCH SWAGER CRIMPS SWAGE SLEEVES ONTO THE WIRE ROPE. AFTER SWAGE GAUGE IS INCLUDED.

BENCH SWAGER



FOR USE WITH HAND SWAGE STUD SERIES ONLY

E0115-H600:
23"

MAKE HAND SWAGING QUICK AND EASY USING SUNCOR'S BENCH SWAGER. BENCH SWAGER CRIMPS THE HAND SWAGE STUDS ONTO THE WIRE ROPE. WAGES 1/8", 5/32" AND 3/16". AFTER SWAGE GAUGE INCLUDED.

BOLT AND CHAIN CUTTER



E0112-BC SERIES:
12" through 36"

FORGED

WIRE ROPE CUTTER



E0111-WR SERIES:
14" through 42"

FORGED

RAILEASY™ CABLE CUTTER



316 STAINLESS STEEL

C0989-00HD:
7-3/4"

HARDENED HEAT TREATED BLADES CUT 5/32" CABLE CLEANLY AND QUICKLY.

RIVET NUT INSTALLATION TOOL



S0380-0000:
16"



TO BE USED WITH RIVET NUTS. TOOL INCLUDES 14 MANDRELS (METRIC AND IMPERIAL AND LEFT HAND AND RIGHT HAND THREAD), WRENCH, STORAGE CASE AND INSTALLATION INSTRUCTIONS.

RIVET NUT MANDREL, UNC THREAD



WITH THE RIVET NUT INSTALLATION TOOL

UNC, RIGHT HAND
S0380-U SERIES:
3/16" 10-24 RH through 3/8"-16 RH

UNC, LEFT HAND
S0380-UL07:
1/4"-20 LH

TO BE USED WITH THE RIVET NUT INSTALLATION TOOL.

RIVET NUT MANDREL, METRIC THREAD



WITH THE RIVET NUT INSTALLATION TOOL

METRIC, RIGHT HAND
S0380-M SERIES:
M3 x .5 through M12 x 1.75

TO BE USED WITH THE RIVET NUT INSTALLATION TOOL.

FASTENER LUBRICANT



CONTAINS BEESWAX

E0102-0000:
1.7oz

APPLY TO ANY THREADED SURFACE TO EASE THREADING. VERY EFFECTIVE ON WOOD SCREWS TO ELIMINATE ANY STRIPPING OF SCREW HEADS AND TO SPEED INSTALLATION.

MX4 LANOX PROTECTANT SPRAY



E0100-0004:
300g Aerosol Can

THIS PRODUCT IS SPECIALLY DESIGNED WITH ANTI-CORROSION LANOLIN FOR LONG-TERM HEAVY-DUTY PROTECTION FOR RESIDENTIAL/COMMERCIAL USE AND WHERE EXTREME ENVIRONMENTAL CONDITIONS PREVAIL.



RIVET NUT MANDREL, UNF THREAD



WITH THE RIVET NUT INSTALLATION TOOL

UNF, RIGHT HAND
S0380-F007:
1/4"-28 RH

UNF, LEFT HAND
S0380-FL07:
1/4"-28 LH

TO BE USED WITH THE RIVET NUT INSTALLATION TOOL.

STAINLESS DRIVER BITS



410 STAINLESS STEEL

PHILLIPS E0101-PH SERIES:
#2 and #3

SQUARE E0101-SL02:
#2

USING STAINLESS DRIVER BITS PREVENTS CONTAMINATION OF STAINLESS SCREW HEADS.

PASSIVATING FLUID



CITRIC ACID FLUID

E0100-0000:
22 FL. OZ

MADE IN USA

FLUID CONSISTS OF CITRIC ACID. NO HAZARDOUS INGREDIENTS. USE PASSIVATING SPRAY ON STAINLESS HARDWARE BEFORE EXPOSURE TO THE ELEMENTS. WASH TREATED AREA THOROUGHLY WITH SOAP AND WATER AFTER USE.

STAINLESS STEEL MAINTENANCE TO MAXIMIZE PRODUCT LIFE

WHAT TO USE FOR MAINTENANCE AND CLEANING

NEVER USE strong acids and chemical solutions (e.g. hydrochloric acid, muratic acid, methylethylkeytone or "spirits of salts"). These chemicals will destroy your stainless steel hardware. If incidental contact with a questionable chemical should happen, the chemical must be removed immediately by water flushing and cleaning with a mild automobile detergent (car wash). You should avoid any abrasive compounds or metal abrasives to clean stainless steel. If your stainless seems to require harsh chemicals or abrasives to clean, you need to reconsider your maintenance schedule.

ALWAYS USE readily available car wash or boat wash products to clean your stainless steel hardware. In cases of extreme staining or corrosion you can use a derived citric acid product like Citrus Surf, while following the safety and use instructions. A marine polish product like Flitz or Prism Polish may also be used to clean and add a slight layer of protection to your stainless hardware.

SUNCOR STAINLESS, INC.

QUALITY ASSURANCE

SUNCOR STAINLESS QUALITY ASSURANCE

Suncor Stainless produces the highest performance quality stainless components in the industry, all backed by the industries only Limited Lifetime Warranty. Quality assurance is a core business practice at Suncor. Our dedicated quality team utilizes state-of-the-art testing equipment to ensure customer satisfaction on every part sold. As an ISO certified company, Suncor Stainless leads the industry in quality products and services.

PRODUCT TESTING

Suncor consistently tests all product that we sell in three areas: **elemental metals content**, **stress and tensile strength**, and **physical salt spray** for corrosion resistance proofing. Additionally, all products are physically inspected for design dimension and physical appearance.

METAL CONTENT TESTING

We utilizes X-Ray Florescence (XRF) chemical analysis to determine the accurate metal content of our products before, during and after the manufacturing process. XRF is an elemental analysis technique that is highly accurate in determining major elements and providing a broad elemental survey in metals.

STRENGTH TESTING

Suncor uses a variety of instruments to test the strength of our parts against the stated specifications. Simply stated, we perform extensive stress tests on all products with stated load performances.

CORROSION RESISTANCE TESTING

Suncor performs extensive materials proofing for corrosion resistance, utilizing a sophisticated salt spray testing process. This places the product under the strain of 5 years of constant ocean water exposure.



XRF HAND HELD MATERIAL ANALYZER



SALT SPRAY TESTER



TENSION TESTING



TENSILE & STRESS TESTING

SUNCOR'S TESTING EQUIPMENT

- WIROP Tension Tester with 60 foot bed and 100,000 lb. capacity
- Universal Stand Up Tension Tester, 12 ft. and 10,000 lb. capacity
- Bruker S1 Titan XRF Hand Held Material Analyzer
- Rockwell Hardness Tester
- Mitutoyo Surface/Roughness Tester
- Optical Comparator
- Singleton Salt Spray Corrosion Tester

ANAB ACCREDITED Certified to ISO 9001:2015 TÜVRheinland

ISO CERTIFICATION signifies that Suncor abides by the strictest standards of quality control and documentation. Our ISO program requires the constant monitoring of the quality of our products, as well as, the constant improvement of our people processes and controls for product innovation and employee training. Under our ISO program, we guarantee our products and your customer satisfaction. Suncor Stainless, Inc. has truly set the bar for performance quality stainless steel.

SUNCOR STAINLESS, INC.


CUSTOM PRODUCTS & SERVICES

SUNCOR STAINLESS SERVICES

Suncor Stainless is committed to quality and unparalleled customer service with the goal of providing you with the best products on the market. We offer a variety of value-added services as well as custom stainless steel parts manufacturing. Our services include **custom parts manufacturing**, **custom chain assemblies**, **threading**, **machine swaging**, **product testing**, **wire rope assemblies**, **custom webbing**, and **retail packaging**.

CUSTOM MANUFACTURING

Suncor Stainless offers a state-of-the-art manufacturing facility that has the unique ability to design, engineer, and manufacture custom parts meant to fit specific functions or requirements. Almost any stainless steel custom-made products can be produced in long or short runs on a made-to-order basis. The Suncor team can work with you to design, specify, and manufacture complete parts or individual components.

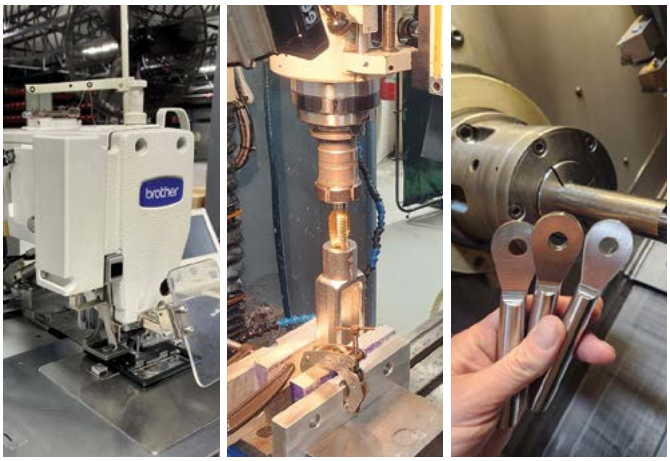

CUSTOM WEBBING

Suncor's Webbing Department offers custom webbing services and features automated sewing machines.

- Black, Orange & White Nylon
- Blue Tubular Nylon
- Light Blue Polyester

CUSTOM THREADING

Suncor can handle almost any custom threading requirements in both long and short runs.

- UNF, UNC and Metric
- Left hand and right hand thread
- Diameters up to 1-1/2"
- Lengths up to 16"


CNC MILLING MACHINE

CNC CAPABILITIES

- CNC Multi-Axis Lathe Turning with Live Tooling Milling Capabilities
- CNC Swiss-Style Screw Machining
- CNC Milling
- CNC Plasma Cutting
- CNC Pin-Marking
- Roll Form Threading

WELDING CAPABILITIES

- TIG Welding of Stainless Steel and Aluminum
- Mig Welding of Stainless Steel


CUSTOM EYEBOLT AND RING


ROLL THREAD MACHINE

SUNCOR STAINLESS, INC.

CUSTOM PRODUCTS & SERVICES



USA MADE CHAIN MANUFACTURING

Suncor manufactures and stocks a large inventory of rated, industrial, MIL-DTL-32655, marine, light duty, decorative and specialty chain, and thousands of accessories. Suncor provides both USA made and imported chain products. We specialize in custom chain fabrication combining welding services, slings, testing, and custom assemblies for all requirements.



CUSTOM CHAIN ASSEMBLY

STRATEGIC RETAIL & PRIVATE LABEL SOLUTIONS

Your brand deserves packaging that reflects the quality of the product inside. Our retail-ready programs combine controlled in-house packaging, reliable fulfillment, and consistent presentation so your inventory arrives shelf-ready and ready to sell. With dedicated in-house packaging capabilities, we help reduce lead times, maintain packaging consistency, and support scalable retail programs without adding unnecessary complexity or cost.

BUILD A RETAIL PROGRAM THAT CARRIES YOUR BRAND FORWARD

Beyond our standard retail offerings, we deliver Custom Private Label Solutions that incorporate your branding, logos, and technical product information directly into the packaging, helping you strengthen brand recognition while relying on our manufacturing and fulfillment expertise.

Partner with us to professionalize your inventory:

- IN-HOUSE FACILITIES:
  Direct oversight means faster turnaround.
- BRAND INTEGRATION:
  Custom labeling tailored to your specifications.
- SCALABLE SUPPLY:
  Consistent packaging quality across all product lines.

Contact us today to review your retail packaging needs, discuss private label options or request a customized quote.



EXAMPLES OF OUR PRODUCT PACKAGING

Cable Railing Solutions to Elevate Your Space.



ATLANTIS®
RAIL SYSTEMS
A division of SUNCOR® Stainless

Atlantis Rail Systems offers a complete line of stainless steel and aluminum railing systems with infill options of cable railing and glass panels. This innovative collection of low maintenance railings offers unobstructed views capable of fitting any indoor or outdoor, commercial or residential design. They have been designed for assembly using a collection of patented fittings and components to allow for the delivery of turn key railing systems at a low cost.



AVAILABLE NATIONALLY THROUGH OUR NETWORK OF DEALERS.

WWW.ATLANTISRAIL.COM
800.541.6829

Spectrum Railing System · RAILEASY · NOVA · HANDISWAGE · ORION · SUNRAIL · RAILSIMPLE · ONYX SERIES

ATLANTIS RAIL SYSTEMS | 70 ARMSTRONG ROAD, PLYMOUTH, MA 02360 | 3900 CIVIC CENTER DRIVE, NORTH LAS VEGAS, NV 89030

SUNCOR STAINLESS, INC.

TERMS & CONDITIONS

TERMS & CONDITIONS

PAYMENT TERMS:
Suncor Stainless accepts payment by credit card or prepayment. For accounts with approved credit, payment terms are Net 30 from the date of invoice.

Interest at a rate of 1.5% per month (or the maximum rate permitted by law, if less) will be charged on all overdue balances. The Buyer shall be responsible for all costs incurred in the collection of past-due accounts, including reasonable legal and collection fees.

All first orders on newly opened accounts must be prepaid unless credit has been approved in advance. No C.O.D. orders are accepted.

Suncor Stainless conducts ongoing credit reviews and reserves the right to modify, suspend, or revoke credit terms at any time based on payment history or other relevant factors.

MINIMUM ORDER:
The minimum order amount is $75.00, excluding freight. Approved orders below the minimum will be subject to a $5.00 minimum order fee.

FREIGHT:
All prices and shipping terms are F.O.B. Plymouth, Massachusetts or North Las Vegas, Nevada. Freight charges are payable by the Buyer at destination when shipped by road freight or prepaid and added to the invoice for FedEx shipments.

Orders with a minimum product value of $3,000 qualify for free freight within the continental United States, using Suncor Stainless' choice of carrier. Prior approval is required and certain restrictions may apply. UPS shipments are available by request only. Consignee billing is not permitted. No residential deliveries.

Any shortages or damage must be reported immediately and within five (5) days of receipt. Damaged shipments must be retained for carrier inspection.

CONDITION OF SALE:
Title of all goods remains with Suncor Stainless until payment in full has been received. For drop shipments, both the Buyer and the Consignee shall be jointly and severally liable for payment. Suncor Stainless expressly reserves the right to recover full payment from the Consignee in the event of nonpayment by the Buyer.

PRICING:
All prices are subject to change without notice.

RETURN POLICY:
Standard products may be returned within sixty (60) days of the purchase date. A Return Authorization (RA) number is required prior to return. Products must be unused, in new and resaleable condition, and returned in original packaging.

No restocking fee applies to standard product returns made within fourteen (14) days of receipt.

Custom or special-order items are non-returnable, including but not limited to custom-made parts, Mil-Spec (MS) parts, and cut lengths of chain or wire rope.

Returns after 14 days are subject to a minimum 15% restocking fee. For freight-free orders, the restocking charge will be the greater of 15% or the original outbound freight cost.

Returns made without an RA will be subject to a 25% restocking fee and may be rejected.

Products returned damaged, with opened or damaged packaging, or in unmarketable condition may incur additional recovery or repackaging fees or may be scrapped or returned to the customer at the customer's expense, at the sole discretion of Suncor Stainless.

Returns will not be accepted after 60 days.

LIMITED WARRANTY:
For current and complete warranty information, please visit www.suncorstainless.com.

IMPORTANT PRODUCT USE WARNING:
All products may fail if abused, misused, overused, or improperly maintained. Such failures may cause loads to fall or swing uncontrollably, resulting in serious injury, death, or property damage.

Never exceed stated working load limits. Do not use any product for overhead lifting unless specifically identified and rated for such use. Working load limits are provided as guidelines only and are subject to change without notice unless accompanied by a test and/or compliance certificate.

All products must be inspected regularly based on use conditions.

Revised 2/2/26

SUNCOR STAINLESS®

Thank you for making Suncor Stainless your number one source for quality stainless products!



CONTACT INFORMATION

HEADQUARTERS
Suncor Stainless, Inc.
70 Armstrong Road
Plymouth, MA 02360

WEST COAST OFFICE & DISTRIBUTION CENTER
3900 Civic Center Drive
North Las Vegas, NV
89030

TELEPHONE (508) 732-9191
SALES (800) 394-2222
FAX (508) 732-9798
EMAIL sales@suncorstainless.com



WWW.SUNCORSTAINLESS.COM

Certified to ISO 9001:2015

Important Notice:
All contents of this catalog, including all logos, product images and descriptions are the sole property of Suncor Stainless, Inc. The making and distribution of copies or reproductions of any product/section image or description within this catalog in printed, electronic or any other format is strictly prohibited. Exceptions, other than for consideration in purchasing product from Suncor Stainless, Inc. must be obtained in writing from the Plymouth, MA headquarters.

© 2026 Suncor Stainless, Inc.