

# GRADE 50 LIFTING CHAIN (S5)

## 316L STAINLESS STEEL



Made in  
USA



Import



Wire  
Formed



Load  
Rated




Suncor  
Exclusive



MIL.  
SPEC



NACM  
360

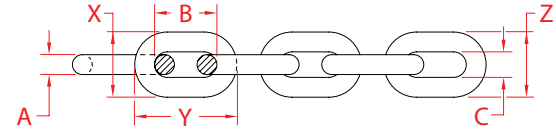

ITEM	SIZE	A	B	C	WLL (lb)	BL (lb)	X (height)	Y (length)	Z (width)	WT (lb/ft)	PACKAGING TYPE	EACH (qty)	INNER (qty)	CARTON (qty)	UPC
S0603-0005*	3/16"	0.19"	0.58"	0.25"	1,100	4,400	0.66"	0.97"	0.66"	0.36	POLYBAG	1	1	400	791506045854
S0603-0007	1/4" (9/32)	0.28"	0.85"	0.38"	2,200	8,800	0.97"	1.38"	0.97"	0.67	POLYBAG	1	1	275	791506045861
S0603-0007-275	1/4" (9/32)	0.28"	0.85"	0.38"	2,200	8,800	0.97"	1.38"	0.97"	0.67	POLYBAG	1	1	1	791506067573
S0603-0008	5/16"	0.32"	0.95"	0.45"	2,700	10,800	1.11"	1.55"	1.11"	0.98	POLYBAG	1	1	275	791506045878
S0603-0008-275	5/16"	0.32"	0.95"	0.45"	2,700	10,800	1.11"	1.55"	1.11"	0.98	POLYBAG	1	1	1	791506067580
S0603-0010*	3/8"	0.39"	1.18"	0.55"	4,400	17,600	1.34"	1.96"	1.34"	1.41	POLYBAG	1	1	200	791506045885
S0603-0010-200*	3/8"	0.39"	1.18"	0.55"	4,400	17,600	1.34"	1.96"	1.34"	1.41	POLYBAG	1	1	1	791506067597
S0603-0013*	1/2"	0.51"	1.55"	0.75"	7,300	29,200	1.78"	2.53"	1.78"	2.60	POLYBAG	1	1	200	791506045892
S0603-0013-200*	1/2"	0.51"	1.55"	0.75"	7,300	29,200	1.78"	2.53"	1.78"	2.60	POLYBAG	1	1	1	791506067603
S0603-0016*	5/8"	0.63"	1.91"	0.90"	9,800	39,200	2.16"	3.12"	2.16"	3.31	POLYBAG	1	1	200	791506062295

**NOTE:**

**CALIBRATED SUNCOR GRADE 50 LIFTING CHAIN, MADE TO GRADE 80 DIMENSIONS. MEETS THE REQUIREMENTS OF: MIL-DTL-32655. NEVER EXCEED WORKING LOAD LIMIT. WORKING LOADS ARE BASED ON GRADUAL PULL AND NOT SHOCK LOADS. MAKE SURE THAT ALL COMPONENTS IN YOUR ASSEMBLY ARE OVERHEAD LIFTING RATED AND HAVE THE SAME WORKING LOADS. ALL DIMENSIONS ARE NOMINAL (+/- 3%) AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.**

**\* IMPORTED**